



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	B	REVISED PER ECO-06-010757	18MAY2006	KS JH

- 1. CRIMP TOOL: 220045-2
- 2. SEE I.S. 408-2028-1

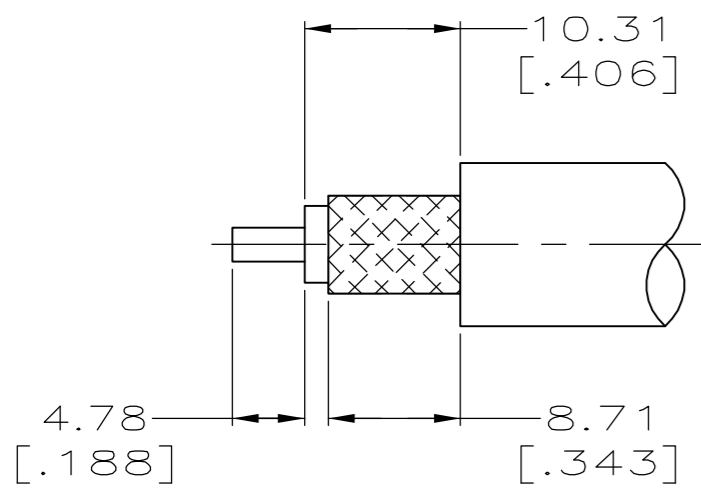

RECOMMENDED STRIP LENGTH

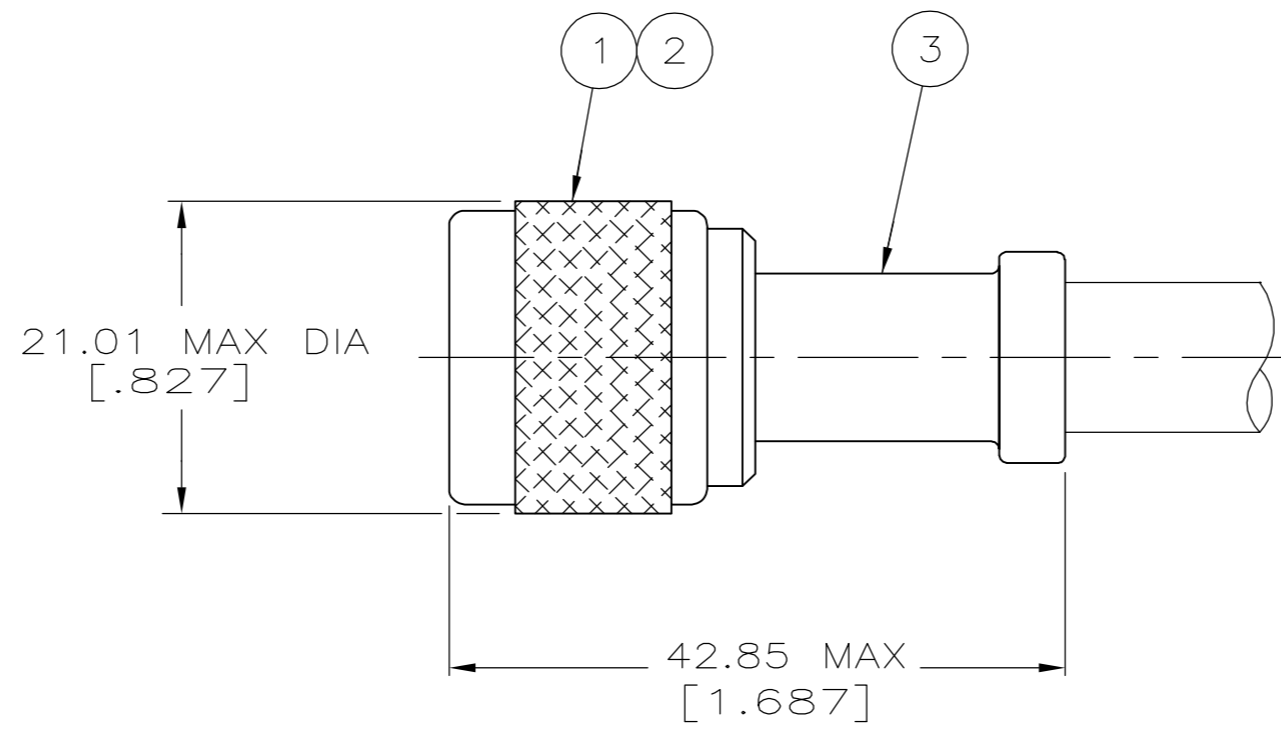

RG-58A/U & 58C/U (BSX 7002-58C/U)	5225392-7 AMP	9-225560-3	225343-2	9-225412-1	5225392-7
RG-142/U,142A/U & 142B/U	5225392-2 AMP	9-225560-4	225343-4	9-225412-0	5225392-2
RG-55/U & 223/U	5225392-1 AMP	9-225560-4	225343-2	9-225412-0	5225392-1
CABLE SIZE	STAMPING	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 22APR2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 22APR2005	NAME PLUG, WEATHERPROOF, SERIES N	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. MICHAEL 22APR2005	PRODUCT SPEC 108-12019	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.41 [.016] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		APPLICATION SPEC -		RESTRICTED TO -
MATERIAL -		WEIGHT 1.2 OZ MAX		SCALE 2:1
		CUSTOMER DRAWING		SHEET 1 of 1

5225392