
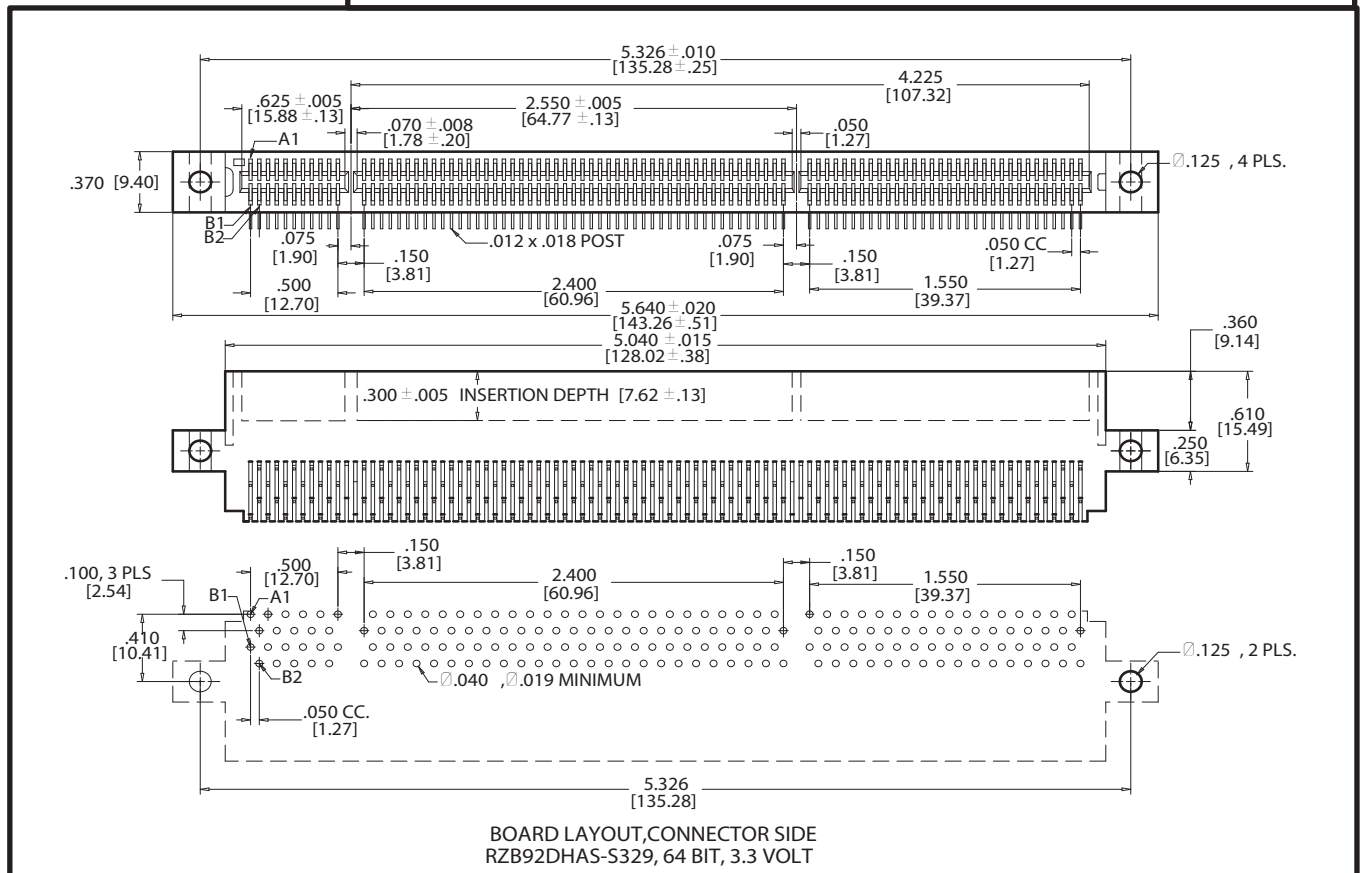


.050" [1.27mm] CONTACT CENTERS [PCI], RIGHT ANGLE BEND

FEATURES

- * Accommodates .062 ±.008" PC board (Consult factory for other board thicknesses)
- * PPS or PCT insulator
- * Molded-in key available
- * High reliability/high cycle hairpin bellows contact
- * 1 amp current rating
- * 150 grams normal force minimum

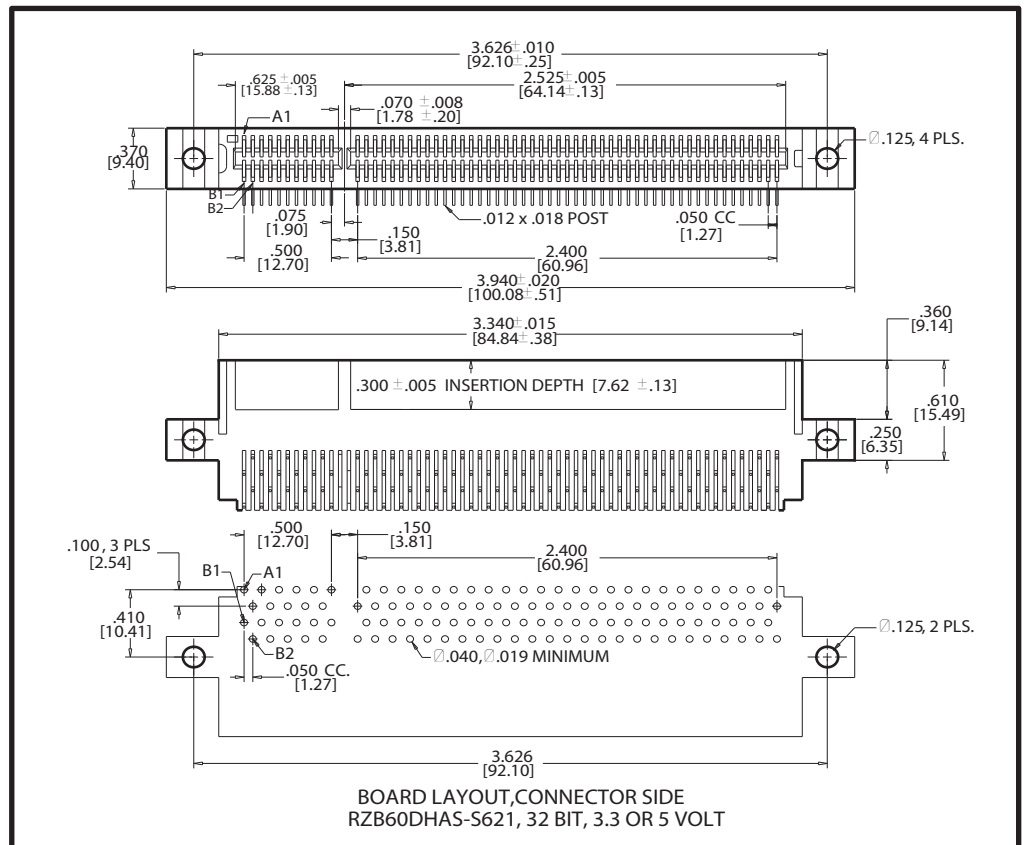

.050" [1.27mm] CONTACT CENTERS [PCI], RIGHT ANGLE BEND

PART NUMBER CODING

R Z B 60 D HA D -S578

MATERIALS (Insulator/Contact)

R = PPS/Phosphor Bronze
 A = PPS/Beryllium Copper
 L = PCT/Phosphor Bronze
 M = PCT/Beryllium Copper
 Consult Factory for Other Materials

CONTACT FINISH

Contact Surface	Termination	Underplate
Z = .00010" Gold	.000100" Tin	.000050" Nickel
X = .000030" Gold	.000100" Tin	.000050" Nickel

CONTACT CENTERS

B = .050" [1.27 mm]

NUMBER OF CONTACT POSITIONS

60 = 11/49 (32 Bit, 3.3 or 5 Volt)
 92 = 11/49/32 (64 Bit, 3.3 Volt)
 or 92 = 49/11/32 (64 Bit, 5 Volt)

MODIFICATIONS

-S329 = 92 (11/49/32) Positions (64 Bit, 3.3 Volt)
 -S250 = 92 (49/11/32) Positions (64 Bit, 5 Volt)
 -S621 = 60 (11/49) Positions (32 Bit, 3.3 or 5 Volt)

MOUNTING STYLE (Page 8)

S = Side Mounting
 D = Flush Mounting
 N = No Mounting
 T = Flush Mounting With Threaded Insert

TERMINATION TYPE (Page 8)

HA = .100" Staggered Dip Solder
 HB = .170" Staggered Dip Solder

READOUT (Page 8)

D = Dual

