


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD PART NO	Among 11/25/04	

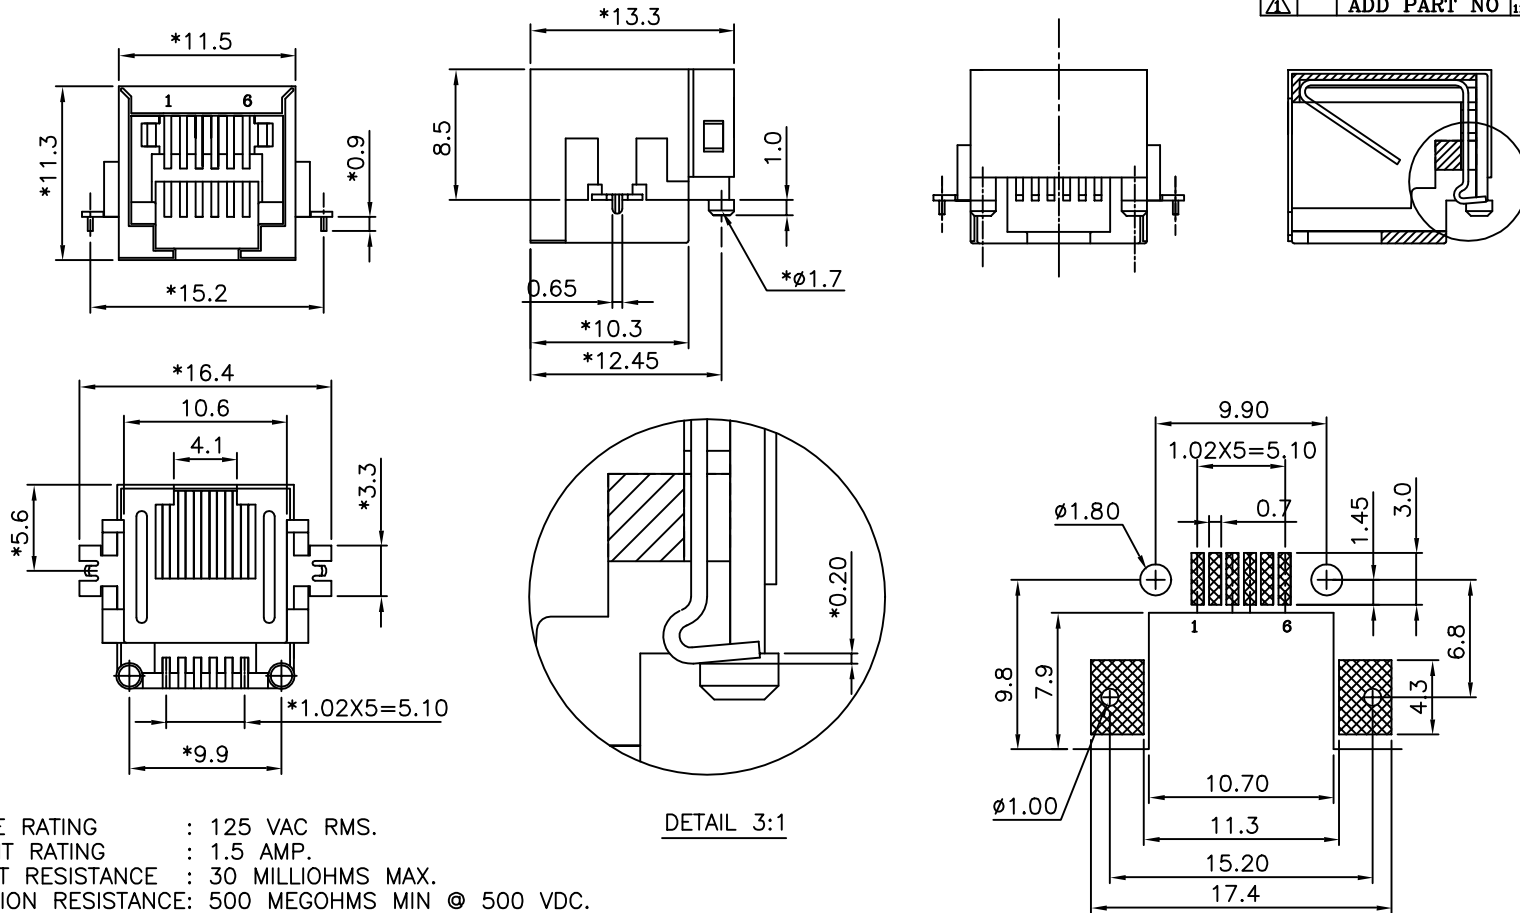

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : NYLON FR52(HIGH TEMPERATURE) UL94V-0
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: E666X-1X021X

NO.OF CONTACTS	PLATING: 1-3u" 4-30u"
2-2C	SHIELD: 2-6u" 5-50u"
4-4C	1-TIN 3-15u"
6-6C	2-NICKEL

DETAIL 3:1

P.C.B. Layout (TOP VIEW) t=1

△ LEAD FREE PART NUMBER: E666X-1X021X-L
 NO.OF CONTACTS: 2-2C, 4-4C, 6-6C
 PLATING: 1-3u" 4-30u", 2-6u" 5-50u", 1-TIN 3-15u", 2-NICKEL

DETACHED LISTS	MM (INCH)	DFTO SAMMY DATE 07/25/02	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD SAMMY DATE 2004/11/27		
	MM	MFO	TITLE RJ11 SIDE ENTRY PCB JACK (SMD)	
	.0 ±0.20 .00 ±0.15 .000 ±0.075	DATE 2004/11/27		
ANGLES ± 0.5	MATERIAL :	DRAWING NO. GE663010		SIZE A3
THIRD ANGLE PROJECTION	QT'Y :	/PART NO. SEE NOTE		REV 1
	FINISH :	DO NOT SCALE DRAWING		SHEET X OF Y
	SCALE : 3:1			