REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01_3	REVISED	5/28/96 6/27/96	

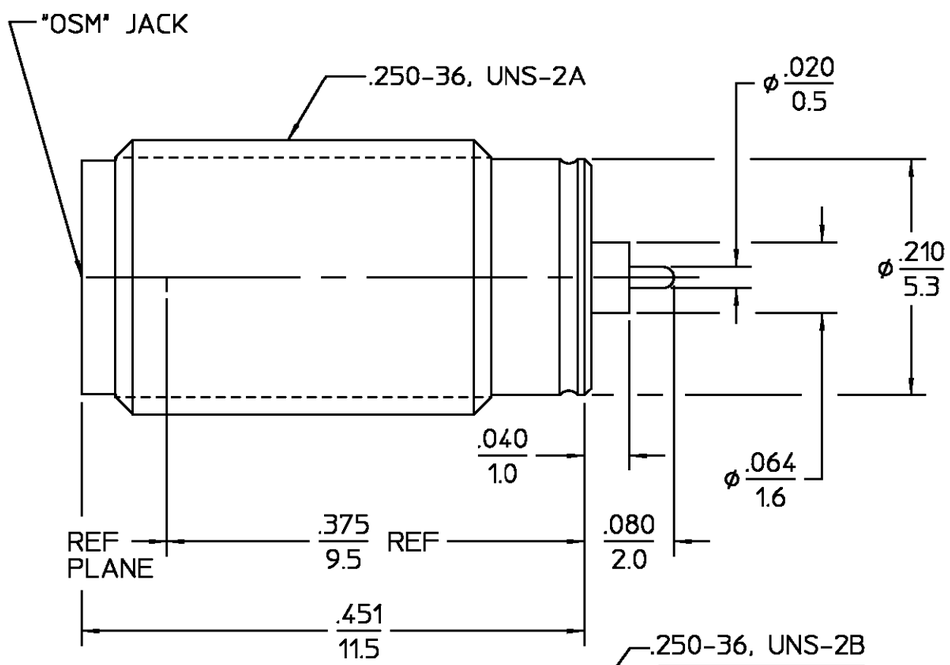

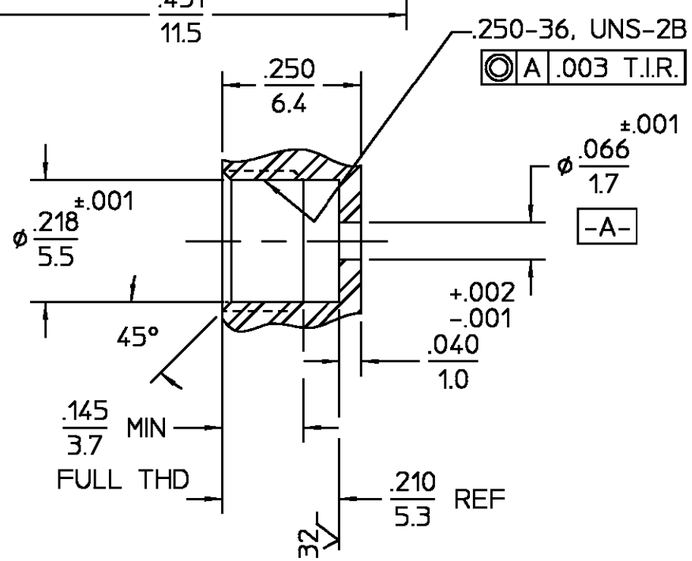

RECOMMENDED MOUNTING HOLE
SCALE 4:1

NOTES:

1. CAPTURED CENTER CONTACT

.XXX = in
XX.X = mm

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
CONTACT EXT BUSHING	IRON-NICKEL-COBALT ALLOY PER MIL-I-23011 CLASS 1 (KOVAR)	GOLD PLATE PER MIL-G-45204
HERMETIC SEAL	GLASS BEAD	N/A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

FRAC.	DEC.	ANGLES
± 1/64	±.005	± 1°

DRAWN BY	N.K.	DATE 2/11/86
CHECKED BY	J.J.	3/17/86
APP'D BY	R.V.	3/27/86

AMP

AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale o f item(s) without written permission.

USE ASS'Y PROCEDURE

(20-607)
NO. A.P. 408-04851

TITLE "OSM", PANEL FEEDTHROUGH, JACK RECEPTACLE, KNIFE EDGE, HERMETIC SEAL

SIZE	CODE IDENT NO.		REV
B	26805	2058-5219-02	01_3
SCALE 8:1			SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1053242-1
SHEET 1 OF 1 REV A