


plating	part no.
GOLD FLASH over NICKEL	131A13019X
min. 20µin HARD GOLD over min. 50µin NICKEL	131B13019X
min. 30µin HARD GOLD over min. 50µin NICKEL	131C13019X

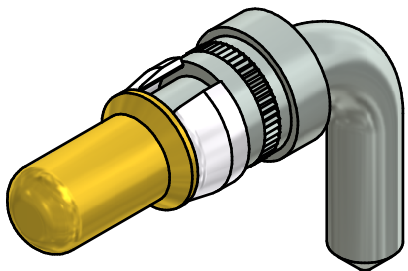

Directive 2002/95/EC RoHS compliant

pos	qty	description	material	plating
3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
2	1	MATING SIDE	COPPER ALLOY	see table
1	1	REAR SIDE	COPPER ALLOY	TIN PLATED

partlist					tolerance	dim. in mm	scale:	10:1	
					date	name	material:	see partlist	
					drawn	23.03.98	Barcinski	title: HIGH POWER CONTACT MALE SOLDER PIN 90°, d=2,85mm, 20A D-SUB COMBINATION	
					appd.	23.03.98	Mickenbecker		
					norm				
					d-old	SK21H04 / 13K21E0A		dwg no:	
								13K11E0A	
								part no: see table	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

1 x b	Ä4364	05.07.12	HS
a	Original		
rev.	description	date	name

title:	dwg no:	DIN-A3
HIGH POWER CONTACT MALE SOLDER PIN 90°, d=2,85mm, 20A D-SUB COMBINATION		
13K11E0A		sh: 1
part no: see table		