



PANEL CUTOUT  
MAX. PANEL THICKNESS  
14.0mm [.55]





4 Ø 5

GREEN (FORWARD)




GREEN (REVERSE)

▲ DPDT ON-(ON)  
CONTACT CONFIGURATION

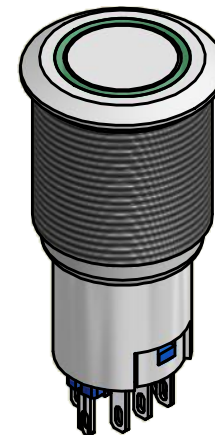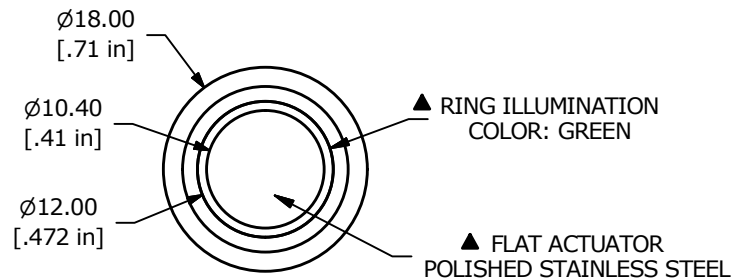

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

(ON) = MOMENTARY

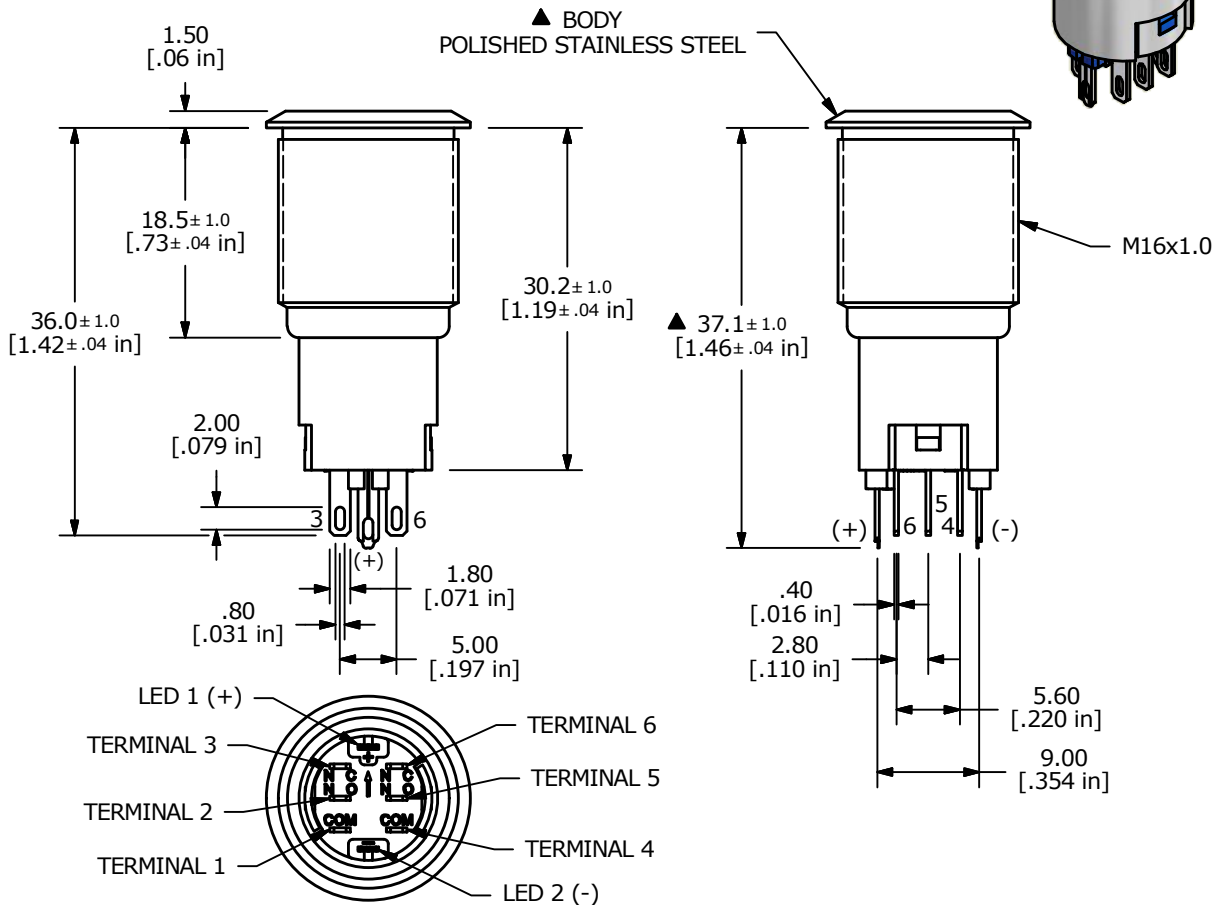

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 2A 48VDC
- ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- OPERATING TEMP.: -20°C to 55°C
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE SUPPLIED: O-RING AND HEXNUT
- INGRESS RATING: IP40
- 2002/95/EC (ROHS) COMPLIANT
- LAMP VOLTAGE: 2.8V

F	22106	UPDATE TO NEW TERMINAL HOUSING	12/28/15	MW
E	20452	CORRECT CONTACT CONFIG.	02/02/12	BMA
D	20439	CORRECT LAMP VOLTAGE	01/30/12	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE PV3F2H0SS-331				
SCALE 1.5:1	DATE 1/25/2012	DR BMA	DWG 52-PV3F2H0SS331	REV F