

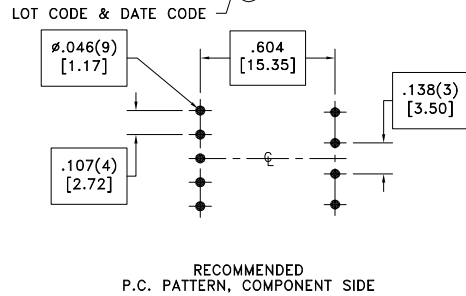


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



\* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

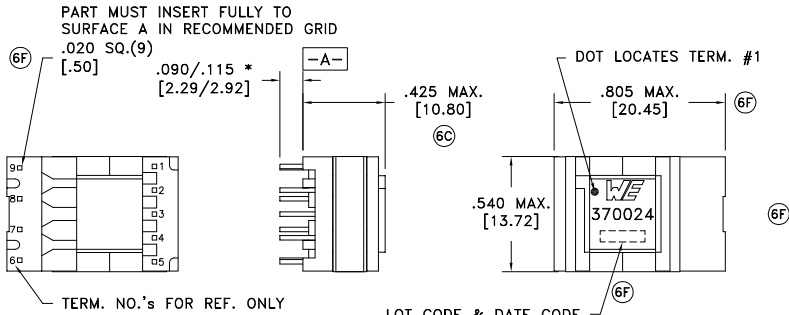

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	6.20 ohms max.
D.C. RESISTANCE	6-9 @20°C	0.10 ohms max.
D.C. RESISTANCE	4-5 @20°C	1.00 ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	1.60mH ±10%
LEAKAGE INDUCTANCE	1-3 tie(4+5, 6+9), 100kHz, 100mVAC, Ls	35uH typ., 50uH max.
DIELECTRIC	1-9 tie(3+5), 4000VAC, 1 second	4000VAC, 1 minute
TURNS RATIO	(1-3):(9-6)	8:1, ±1%
TURNS RATIO	(1-3):(5-4)	6:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C.

- Complies with the following requirements as defined by IEC61558-2-16, Amendment 1:
- Basic insulation for a working voltage of 600VDC.
  - Reinforced insulation for a working voltage of 239VAC.

- Wire insulation & RoHS status not affected by wire color.
- Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.001 [.03]	DRAWING TITLE	⑥D PART NO. <b>750370024</b>
6F	8/15	Method: Tray			<b>TRANSFORMER</b>	
6E	3/11	PKG-0730			EE13/7/4	
6D	5/10	www.we-online.com/midcom			eiSos p/n: 750370024	
6C	9/09	SEE REVISION SHEET FOR REVISION LEVEL			compliant RoHS	