
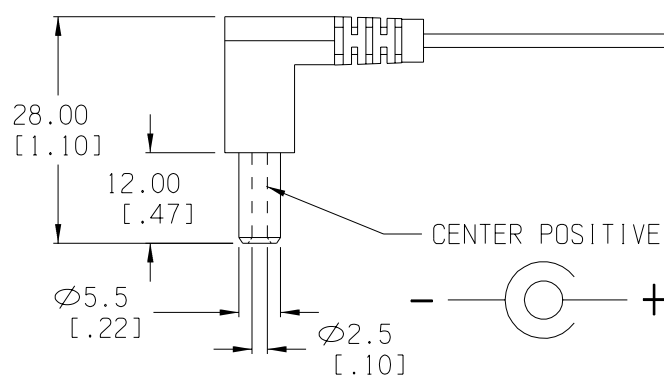



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---|------|------|-----|
| 02/01/03 | A | (1) 29.50 was 31.00 (2) 28.00 was 30.00 (3) added "zip" | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |

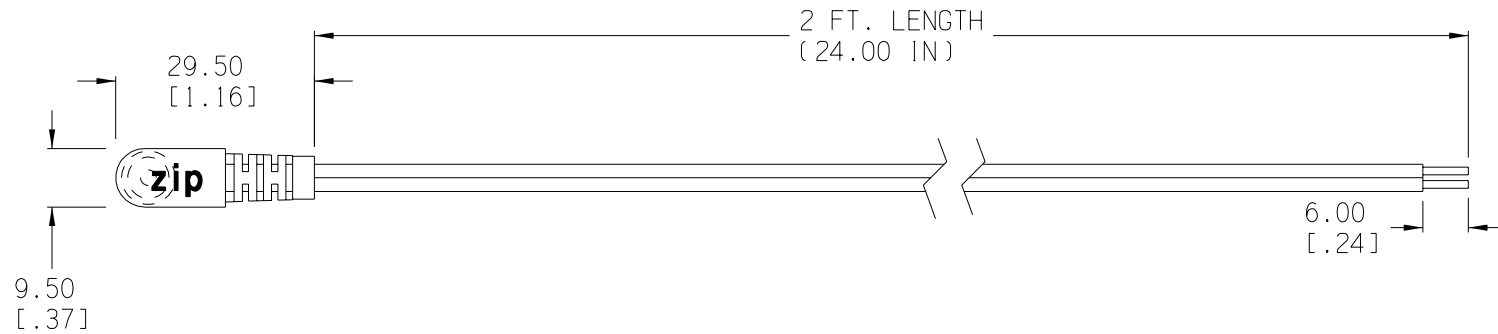

HOUSING: BLACK
 CORD: UL2468, 300V, 80°C, 18 AWG
 PASSES UL FLAME TEST VW-1
 CENTER IS POSITIVE CONTACT
 DC MOLDED PLUG: 2.5mm X 5.5mm

| | | | |
|---------------------------|---|----------------------------|---------------|
| Tolerance (Inches) |  Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale | Drawn By B.S. |
| Decimal ±.5 (.020) | | Approved By T.B. | |
| Fractional ± .8 (.030) | Title 2.5mm DC MOLDED PLUG WITH 2' WIRE LEADS | | |
| Angular ± 3° | Date 02/01/03 | Drawing Number 172-4208 | |