

## Housing - HC-B 16-TFQ-N-O1M25S - 1460135

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

HEAVYCON sleeve housing B16, for double locking latch, height 65 mm, with support 1x M25, lateral conductor exit



### Key commercial data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Dimensions

Height	65 mm
Width	43 mm
Length	94 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

#### General

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Housing type	Sleeve housings
Locking type	For double locking latch
No. of cable exits	1
Cable exit	Lateral
Screw connection	None
Type of the screw connection	1 x M25
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Assembly instructions	For half and full screw connections

### Classifications

#### eCl@ss

eCl@ss 4.0	272607xx
------------	----------

# Housing - HC-B 16-TFQ-N-O1M25S - 1460135

## Classifications

### eCl@ss

eCl@ss 4.1	27260701
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

### ETIM


ETIM 3.0	EC000438
ETIM 4.0	EC000437
ETIM 5.0	EC000437

### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

## Drawings

Dimensioned drawing

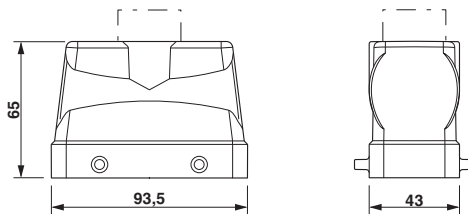

Dimensional drawing