



DIMENSIONS mm (inches)

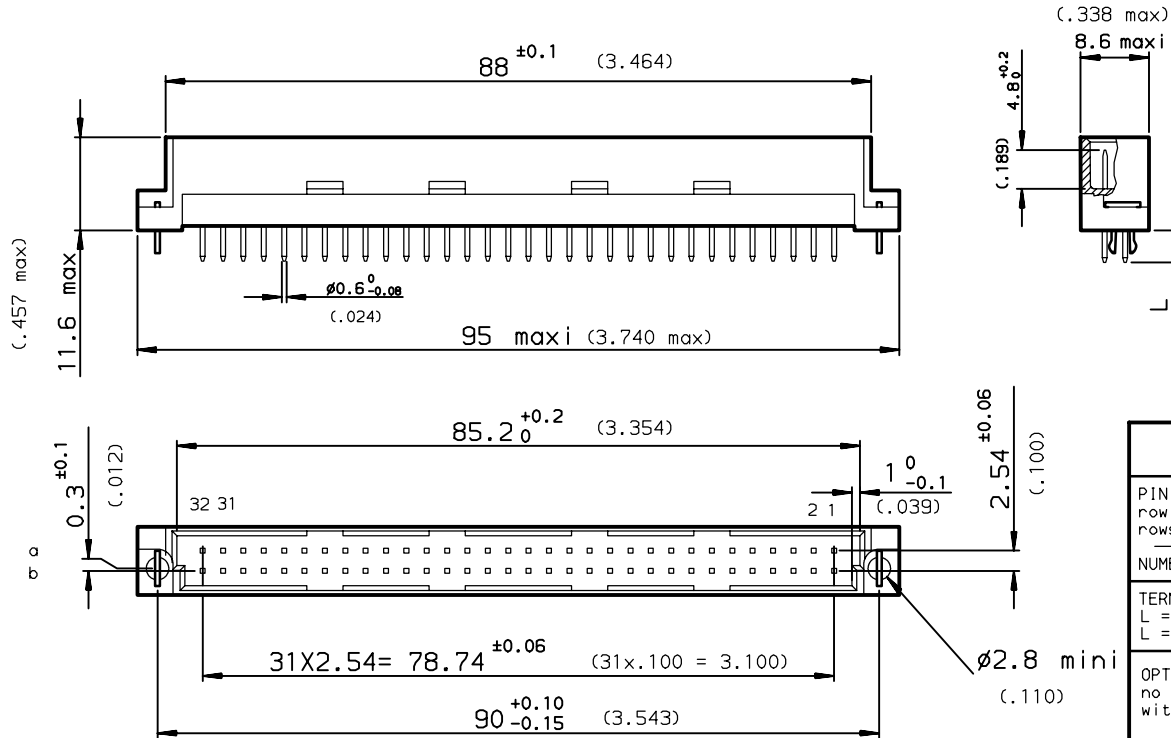

PART NUMBER	8609			58				5	
PIN OUT									
row a				1				32	
rows a-b				2				64	
NUMBER OF CONTACTS									
TERMINATION									
L = 2.70 ±0.25 (.106)									24
L = 4.65 ±0.25 (.183)									14
OPTIONS									
no option									7
with harpoons									H
									A
									R
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									5
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

PCB DRILLING

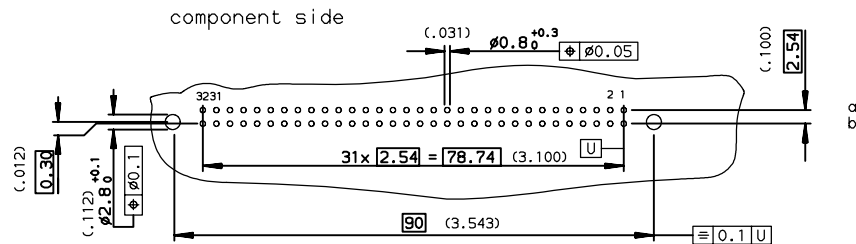

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface	tolerance std	projection	mm	
		ISO 1302	ISO 406 ISO 1101			
TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	ROUILLARD	1992/07/17	ANGULAR	0.X	±0.1	size A3
Eng	TARON	1992/07/17	LINEAR	0.XX	±0.1	Scale 1.5
Chr	LEGARE	1992/07/17	0.XX' ±2'	0.XXX	±0.1	ECN L506-0095
Appr	LEGARE	1992/07/17	Product family	DIN 8609		Spec ref -
		title STRAIGHT MALE - STYLE Q			Rev. D	
		SOLDER TO BOARD			C-8609-0289	
catalog no		-			CUSTOMER sheet 1 of 1	

rev	ecn no	dr	date
B	-	ROU	1996/02/20
C	L505-001	JTA	2005/03/01
D	L506-0095	LGO	2006/06/15
-	-	-	-
-	-	-	-
-	-	-	-