


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAXIMUM BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH = L ± .3 [7]
MLT2LH-LP316	2.0" [51]	50	7.9" [201]
MLT4LH-LP316	4.0" [102]	50	14.3" [362]
MLT6LH-LP316	6.0" [152]	50	20.5" [521]
MLT8LH-LP316	8.0" [203]	50	26.8" [679]

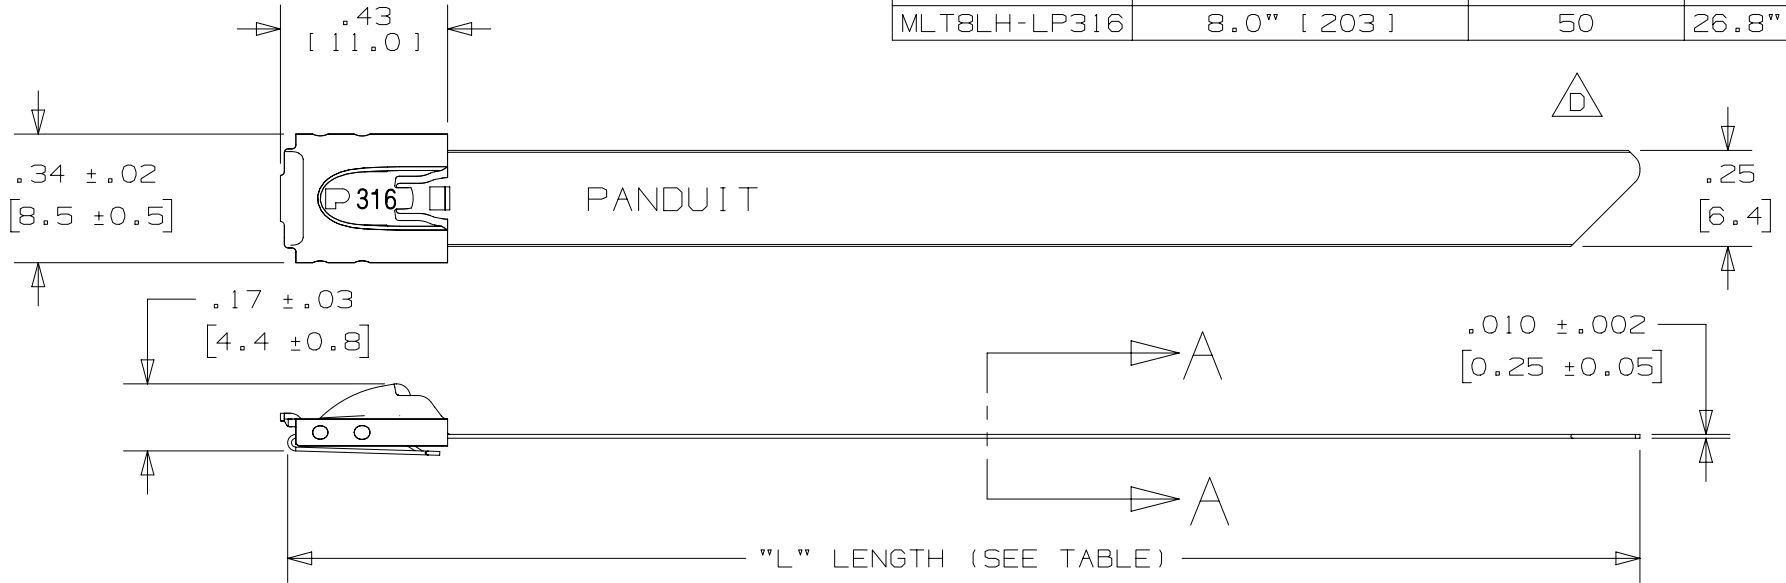

- NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
 2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS (1112 NEWTONS) WHEN TESTED ON A 1 1/2" MANDREL.
 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°

FULLY ROUNDED EDGES ALONG STRAP BODY

SECTION A - A
SCALE: 8x

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	MATERIAL:	DRAWING NUMBER:
							METAL LOCKING TIE LIGHT-HEAVY SERIES 316 STAINLESS STEEL	316 STAINLESS STEEL	N41127BS_DC
							CUSTOMER DRAWING		
							ITEM REVISION NAME N41127BS/05	PANDUIT	
							DATASET FILE NAME N41127BS/05		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		
05	10.01.15	BDK	SKB	RGRO	D. ADDED NEW TIP CONFIGURATION	N41127BS_DS	THIRD ANGLE PROJECTION		
							DRAWN BY JAMB	SCALE 2:1	SHT 1 OF 1
							DATE 6/03	CHK DPN	SIZE A