


Nomenclature

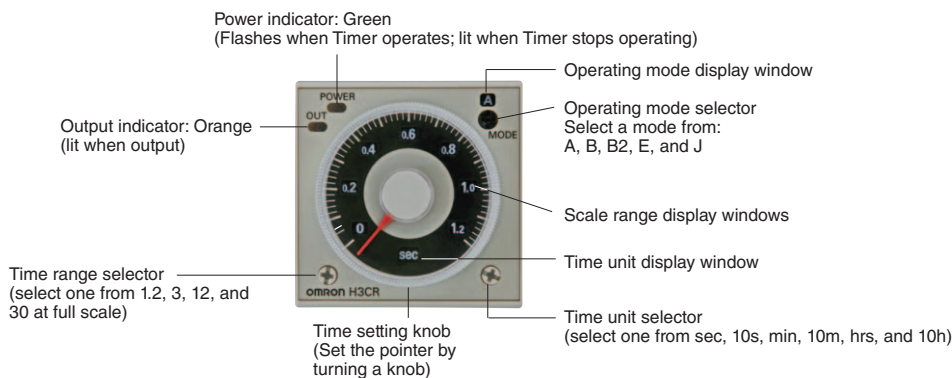

Time range

Time unit	sec (second)	10s (x 10 seconds)	min (minute)	10m (x 10 minutes)	hrs (hour)	10h (x 10 hours)
Full scale setting	1.2	0.05 to 1.2	1.2 to 12	0.12 to 1.2	1.2 to 12	0.12 to 1.2
	3	0.3 to 3	3 to 30	0.3 to 3	3 to 30	0.3 to 3
	12	1.2 to 12	12 to 120	1.2 to 12	12 to 120	1.2 to 12
	30	3 to 30	30 to 300	3 to 30	30 to 300	3 to 30

Timing Chart

A: ON-delay	<p>Basic operation</p>	J: One-shot	<p>Basic operation</p>
B: Flicker OFF start	<p>Basic operation</p>		
B2: Flicker ON start	<p>Basic operation</p>		
E: Interval	<p>Basic operation</p>		

Accessories

<p>DIN rail Mount Socket</p> <p>P2CF-08-E/P2CF-11-E</p>	<p>On-panel Mount Socket</p> <p>P3G-08/P3GA-11</p>	<p>On-panel Mounting Adaptor</p> <p>Y92F-30</p>	<p>Hard protect Cover</p> <p>Y92A-48B</p>	<p>Water Proof Cover (IP66)</p> <p>Y92A-48N</p>
--	---	--	--	--

OMRON Corporation Industrial Automation Company
Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands

Tel: (31) 2356-81-300/Fax: (31) 2356-81-388
<https://industrial.omron.eu/en/home>

OMRON ELECTRONICS

Burhaniye Mah. Tunuslu Mahmut Paşa Cad. No:10
34676 Üsküdar, İstanbul

Tel: (90) 216-556-5130/Fax: (90) 216-556-5160
<https://industrial.omron.com.tr>

© OMRON Corporation 2018 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

Cat. No. L136-E1-01

0318 (0318)