


1. Wiring Diagram.

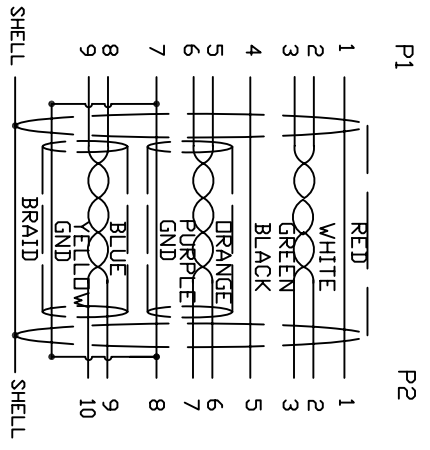

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE palybag

6	CDRE	RH14.2*28.5*6.35mm	2	
5	CONN	USB3.0 MICRO B MAILE G/F BLACK	1	P2
4	PVC	45P PVC BLACK OVERMOLD	25g	
3	PE	LDPE 500026 6201	16g	
2	CONN	USB3.0 A/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.127T) *1P+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *1P+24AWG(7/0.21T)*2C+A+D+B (1//6/0.12AM) OD5.5 BLACK	1	500mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
		BILL OF MATERIAL		

A	2015/11/24	INITIAL RELEASE	2015/11/24
REVISION#		DESCRIPTION	DATE
Cnc Tech, LLC		TITLE	DATE
DRAWN	EDWIN LA	DATE	11/24/15
CHECKED	WENC	CUSTOMER P/N:	
APPROVAL		CUSTOMER:	
		SHEET	1 OF 1
		DWN NO.	103-1092-BL-F0050
		TITLE	USB3.0 A/M-MICRO B W/PROPPERS 0.5M
		REV	REV A