
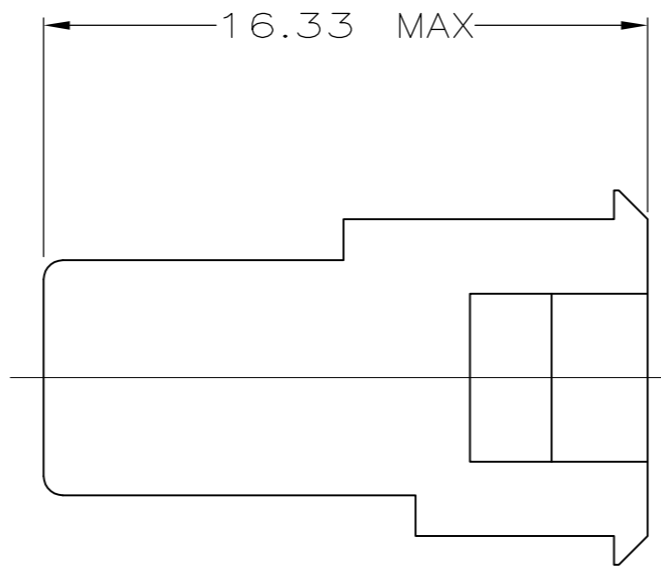
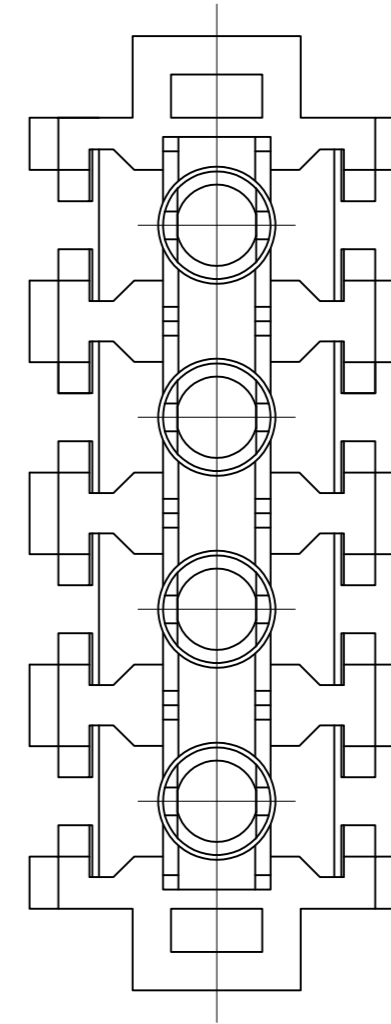
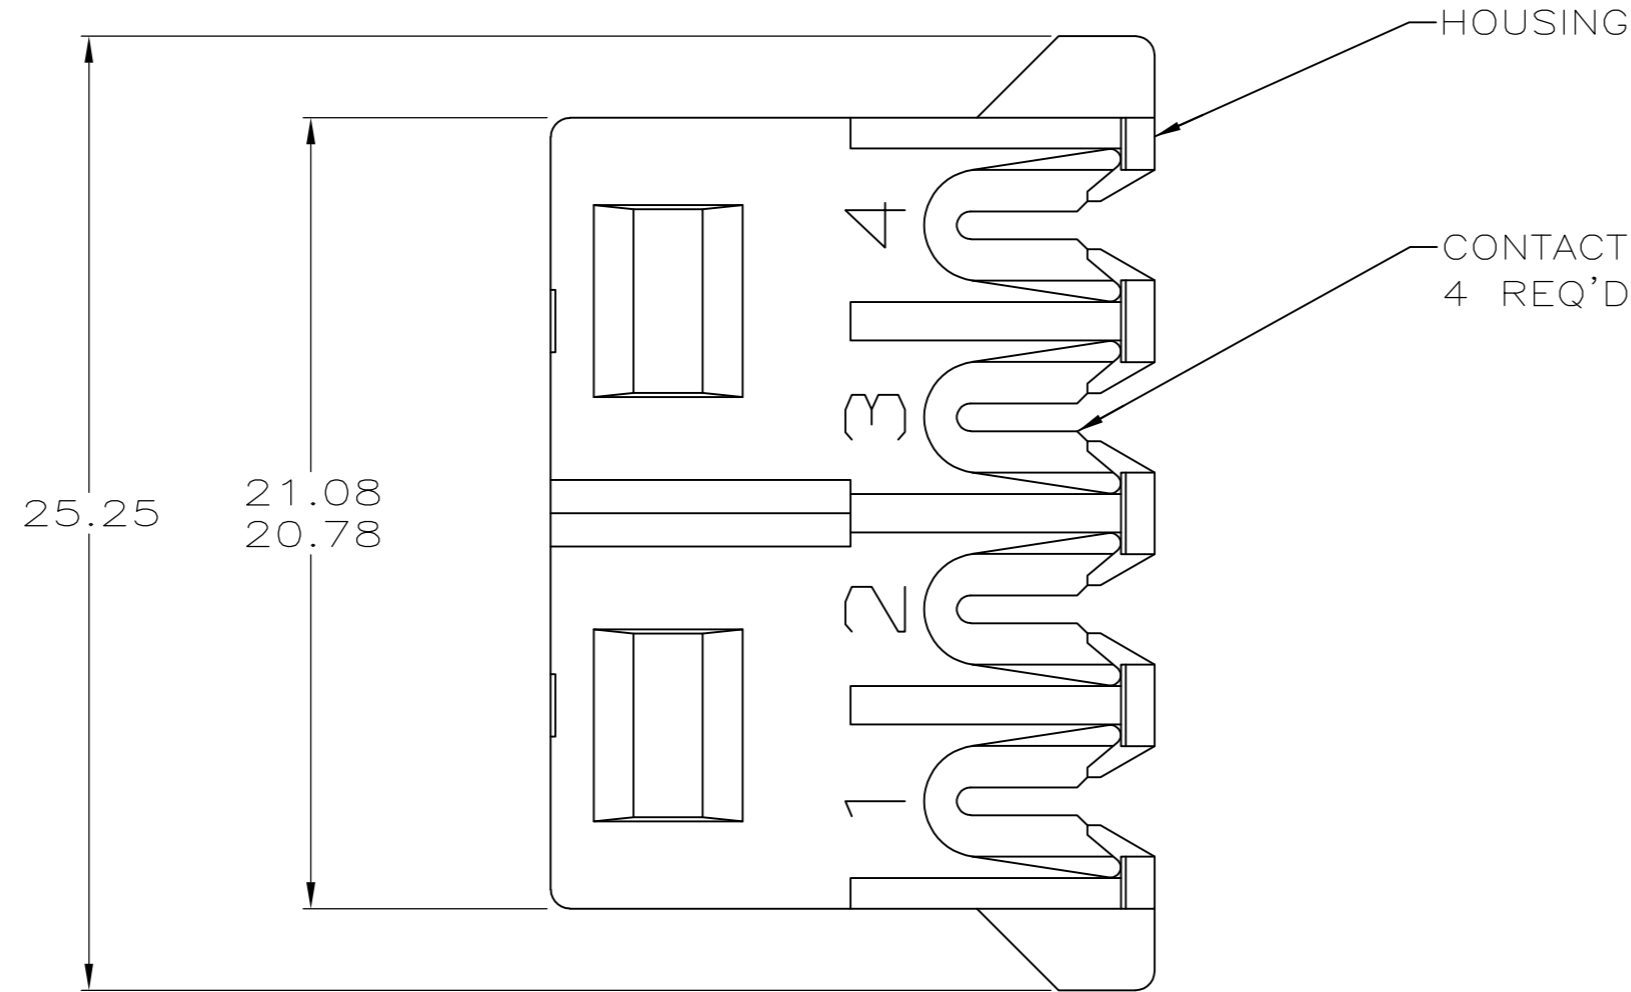


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CM	0	F1		REVISED PER ECO-11-004820	11MAR11	RK HMR	

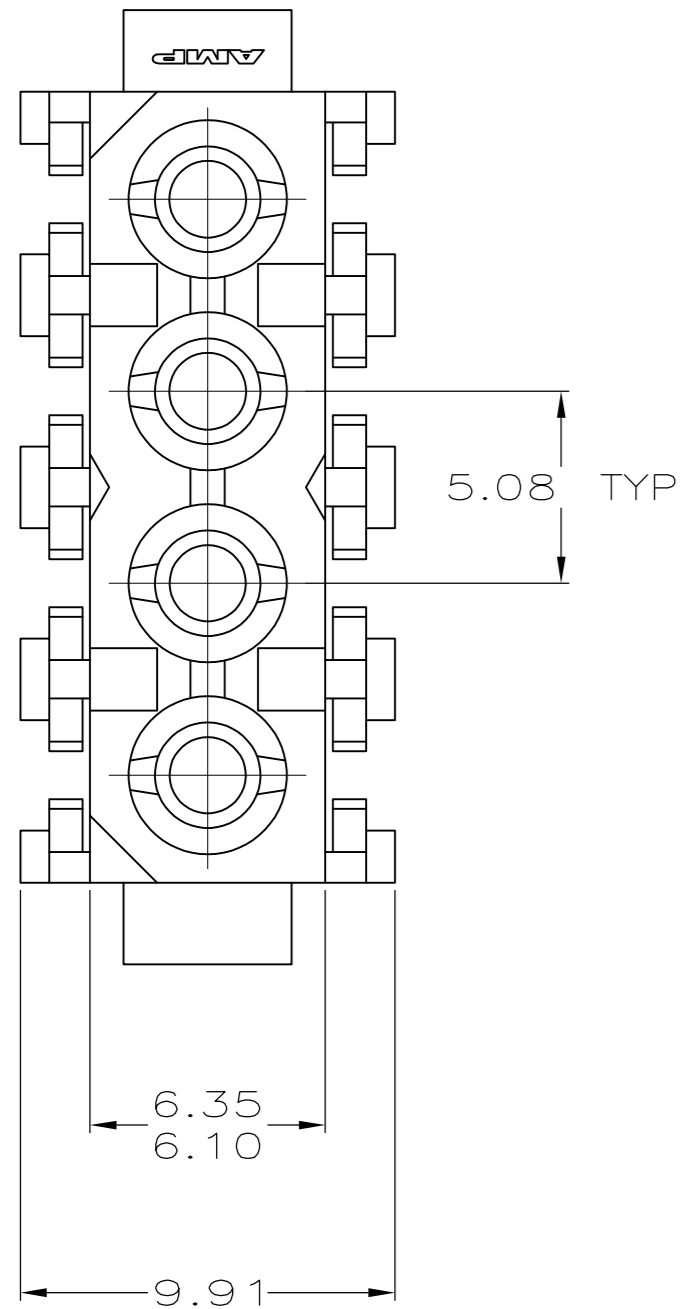

- NOTE DELETED.
- INSULATION DIAMETER 2.41[.095] MAX.

COLOR	WIRE SIZE	CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NO
BLUE	1.25 mm ² (16 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-5
YELLOW	0.5 mm ² (20 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-4
ORANGE	0.8 mm ² (18 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-3
RED	0.3 mm ² (22 AWG)	PHOS BRONZE, TIN	NYLON,UL 94V-2	770156-2

MM	IN	MM	IN
9.91	.390	-	-
6.35	.250	25.25	.994
6.10	.240	21.08	.830
5.08	.200	20.78	.818
0.13	.005	16.33	.643

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN K. WHITAKER 2-10-94	TE Connectivity
CHK R. SWING 2-10-94	
APVD -	NAME
PRODUCT SPEC -	PLUG ASSEMBLY, INSULATION DISPLACEMENT, COMMERCIAL MATE-N-LOK(TM)
APPLICATION SPEC -	SIZE A2
WEIGHT -	CAGE CODE 00779
CUSTOMER DRAWING	DRAWING NO C-770156
SCALE 5:1	SHEET 1 of 1
REV F1	RESTRICTED TO -