



A

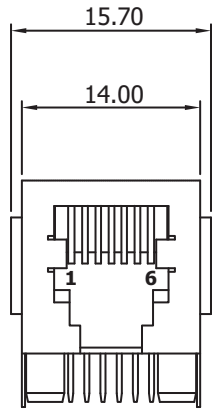

A

B

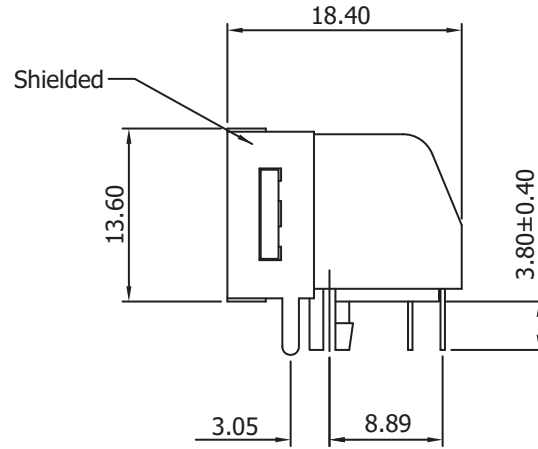

B

C

**Materials:**

- Insulator: P.B.T. Glass Filled, UL94V-0
- Soldering Temperature: 235°C
- Spring Wire: 0.35MM Thickness Phosphor Bronze Gold Plating over Nickel
- Color: Black

C


D

**Electrical:**

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.


D

E

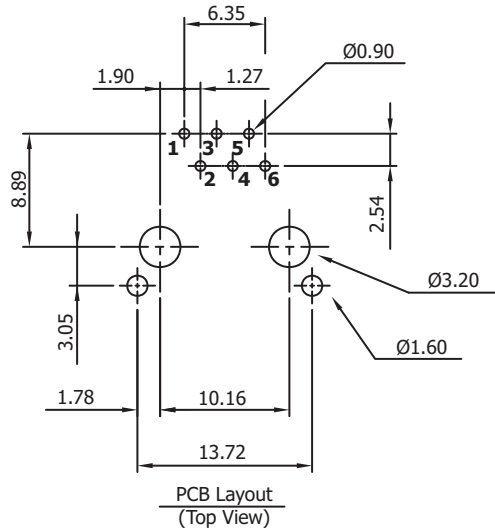

E

F



F

Unit: MM

G

Scale	1:1						Name	
TOLERANCE							Drawn	12.21.11
X.X	±0.40						Chappell	
X.XX	±0.25					Approved		
X.XXX	±0.15							
Angle	±3°							
				Modification	Date	Name		

G

H



Item No.		A-2004-0-4-LP/S-R	
Title			
Very Low Profile PCB Jack - RJ11, 90°, Shielded, Side Entry, 6µ"			
Drawing No.		rev00	
Replace		Sheet	

H