



LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
GW	-	A	-	18APR2001	BL	KM

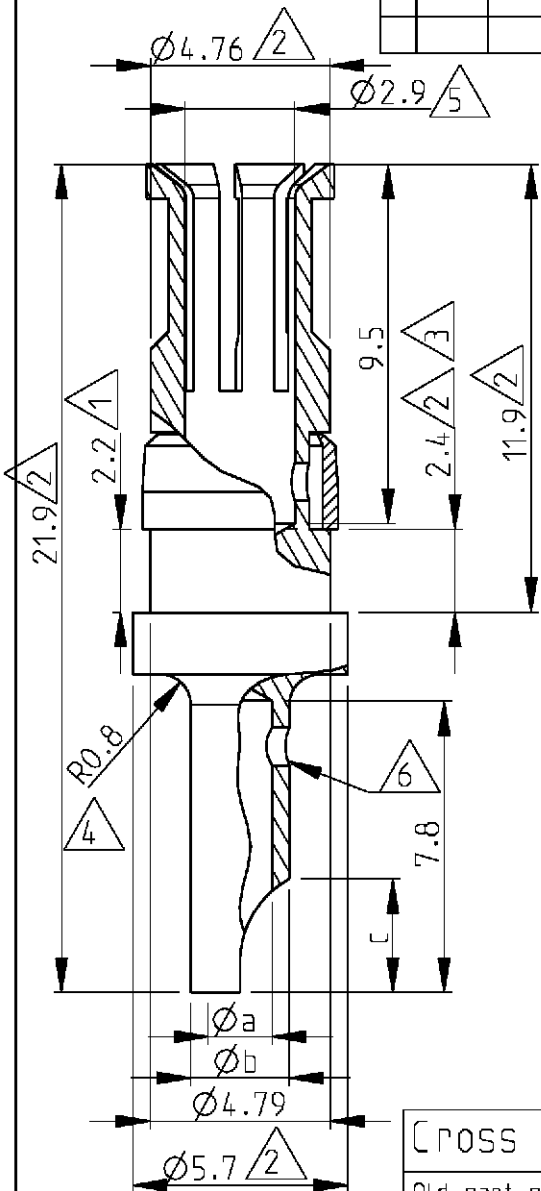

2:1

7) Application according to DIN 41612 type M female connectors and 2 μm Z-pack HM.

- 6 Only on 1-1393589-4
- 5 Initial dimension.
- 4 Not applicable on 1-1393589-6
- 3 Measured with spring moved towards the mating face
- 2 Max dimension
- 1 Min dimensions

Cross reference table

Old part number	Tyco part number	Current	Øa	Øb	dim c	Material	Plating
C42334-A347-A100	1-1393589-6	40 A	4.8	5.6	5.2	CuBe	Au or Pd in contact area
C42334-A347-A99	1-1393589-5	20 A	2.8	3.7	4	CuBe	Au or Pd in contact area
C42334-A347-A98	1-1393589-4	10 A	1.7	2.6	3	CuBe	Au or Pd in contact area

2000
 RELEASED FOR PUBLICATION
 THIS DRAWING IS UNPUBLISHED.
 COPYRIGHT 2000 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

DIMENSIONS:		DWN	18APR2001
mm		CHR	18APR2001
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	18APR2001
0 PLC	±	PRODUCT SPEC	-
1 PLC	±	APPLICATION SPEC	-
2 PLC	±	WEIGHT	-
3 PLC	±	CUSTOMER DRAWING	
4 PLC	±		
ANGLES	±		

MATERIAL	-	FINISH	-
		Tyco Electronics	
		Oostkamp - Belgium	
NAME			
Pre-mating high-current socket with wire connection			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A 4	00779	C=1-1393589-4	-

SCALE	5/1	SHEET	1 OF 1	REV	A
-------	-----	-------	--------	-----	---