

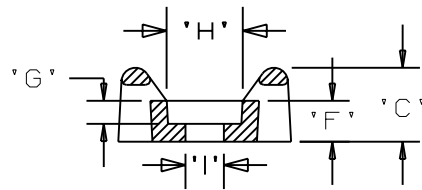


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.*	RECOMMENDED FASTENER	'A'	'B'	'C'	'D'	'E'	'F'	'G' 'REF'	'H' 'REF'	'I' 'REF'	USE WITH THESE CABLE TIE CROSS SECTIONS	WEIGHT (g) lbs/100 pcs.
TM3S8-_69	#8 (M4) SCREW	0.86 [ 21.8 ]	0.61 [ 15.5 ]	0.38 [ 9.5 ]	0.320 [ 8.17 ]	0.088 [ 2.2 ]	0.21 [ 5.3 ]	0.105 [ 2.7 ]	0.319	0.175	MINIATURE INTERMEDIATE STANDARD LT. HEAVY	0.369 (167.5)
TM3S10-_69	#10 (M5) SCREW				±.020 [ .5 ]	±.020 [ .5 ]		0.115 [ 2.9 ]				0.380

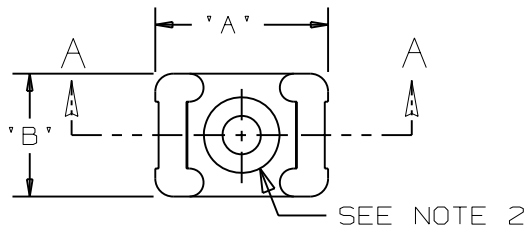

SECTION A - A



NOTES:

- \*1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. HOLE DIMENSIONS SHOULD ACCOMMODATE SPECIFIED RECOMMENDED FASTENER.

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

CAD FILENAME/LAYERS

G00239MW\_PB\_TM3S69\_00

**PANDUIT**

CORP.

TINLEY PARK, ILLINOIS

TM3S\_\_-\_69 - TIE MOUNT  
FLAME RETARDANT NYLON

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±0.05 [ 1.3 ] (.XXX) ±0.010 [ 0.25 ]  
(.XX) ±0.02 [ 0.5 ] ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE  
PROJECTION.

DRAWN BY

DJSM

MAT'L:

FLAME  
RETARDANT  
NYLON

SCALE

NONE

DATE

4/4/07

DRAWING NO.

G00239MW

CHK'D

DWG

A

SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
R	4/4/07	DJSM		INITIAL DRAWING -- PULLED FROM G00239EN_PB_TM3S_10	G00239MW	R		