
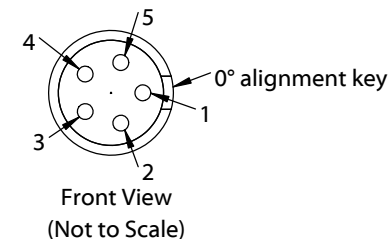
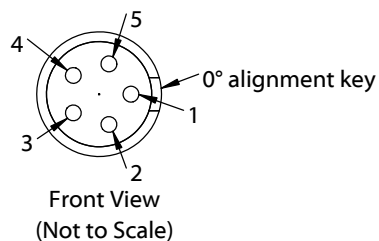


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	51-00019.M	Connector, PPL7, 5C, 0° plug, 7x38 mm, chrome, solder, Ø2.2-5.2 mm wire, molding style	2	
2	30-00918	Wire, 4C BC, 24 AWG, UL20280, 300V, 80C, 4.8 mm braided shield, FT2, TPU	1	
3	24-00206	Overmold, PPL7 strian relief, 10x24 mm	2	TPU

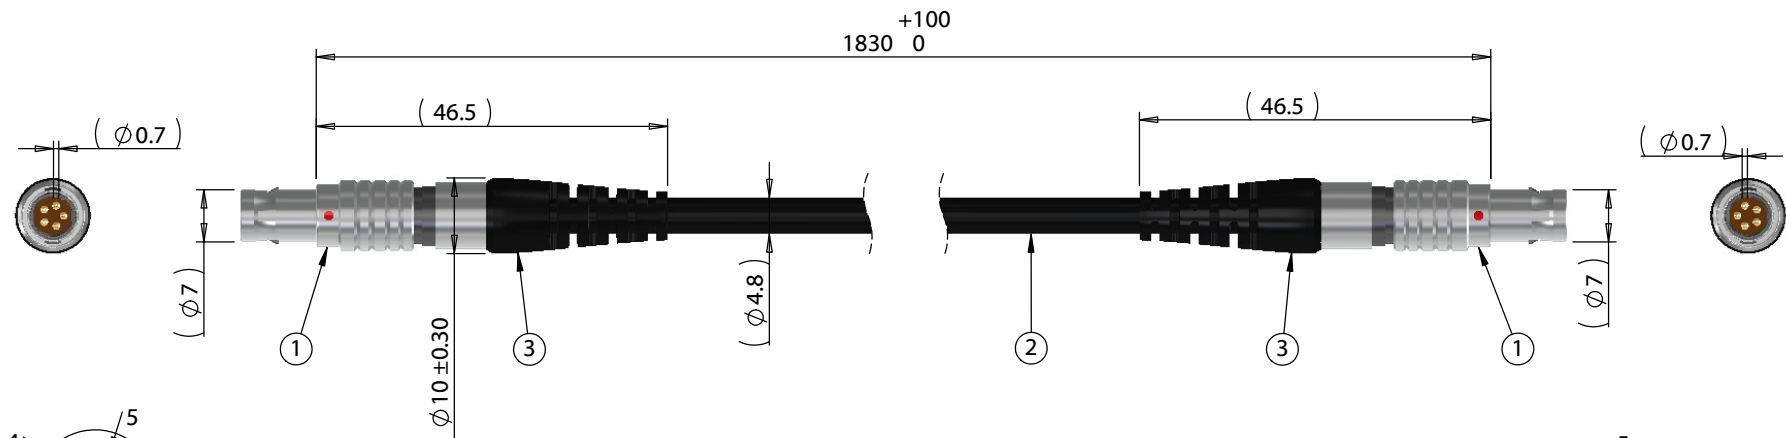

50-00019.M	Wiring Diagram wire color	50-00019.M
1	Red	1
2	White	2
3	Black	3
4	Yellow	4
5	Drain/Shield	5

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	3/27/2018	Initial release	Verified:			RoHS and REACH compliant			
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-02263</td> </tr> </table>	Size:	Part number:	A	10-02263
Size:	Part number:								
A	10-02263								
				Description: Cable, 1830 mm, 5C PPL7 plug 51-00019.M to same, 24 AWG, UL20280 30-00918	<table border="1"> <tr> <td>Scale:</td> <td>1:1</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale:	1:1		Sheet 1 of 1
Scale:	1:1		Sheet 1 of 1						

5

4

3

2

1