

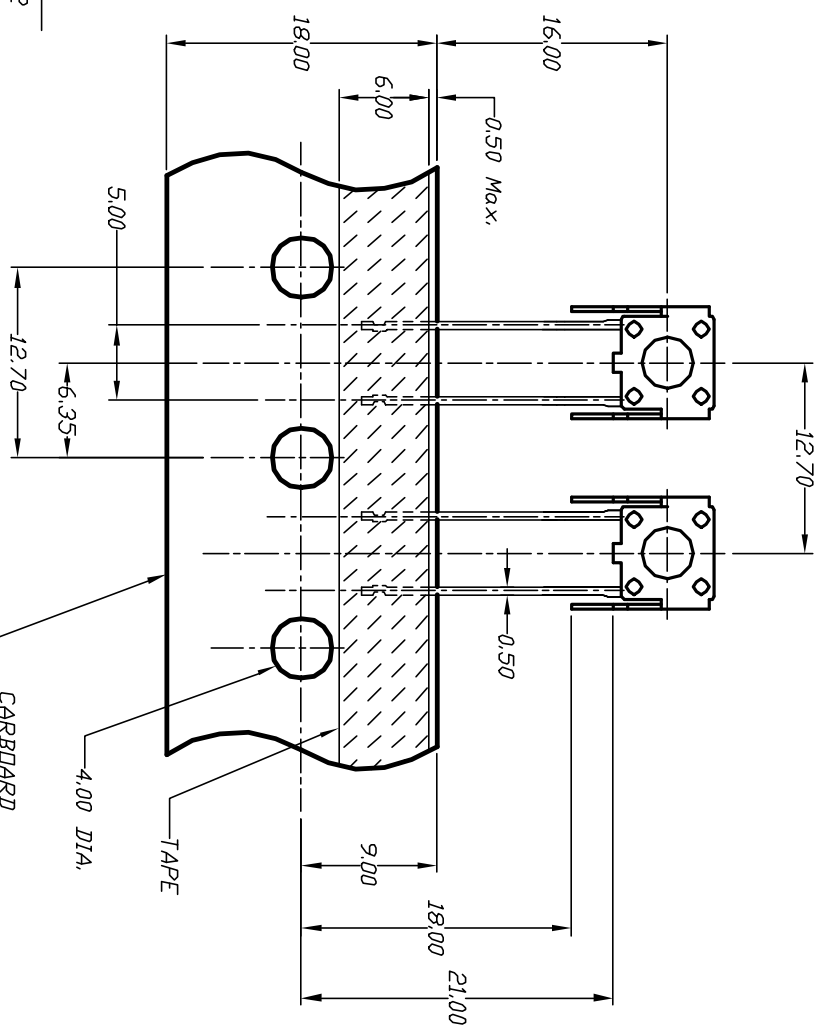


RECOMMEND P.C.B. LAYOUT

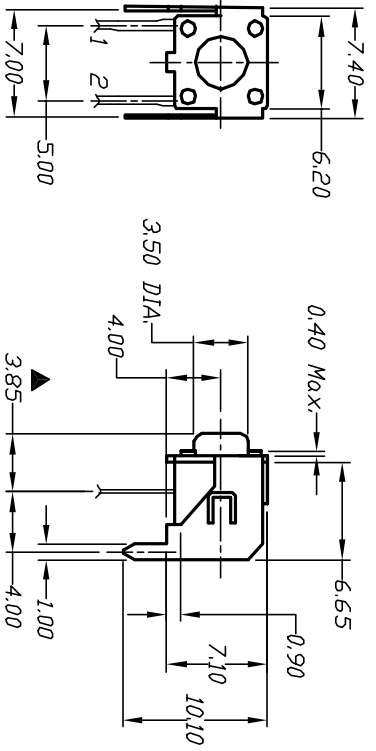

CIRCUIT: SPST

CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING: 50mA, @12VDC
 5. OPERATING FORCE: 160±50gf
 6. TRAVEL: 0.25 +0.2/-0.1mm
 7. CONTACT RESISTANCE: 100 milliohms Max.
 8. CARRIER IS FOLDED EVERY 25 PITCHES
(24 SWITCHES PER FOLD)
 9. 700 SWITCHES PER BOX
 10. DESIGNATE MAJOR DIMENSIONS



B	13210	NOTE 9 WAS 1000	6/13/03	AR
A	12650	RELEASED FOR PRODUCTION	12/20/02	
REV.	ECN NO.	DESCRIPTION	DATE	CHK'D

TITLE		SCALE	DATE	DR	DWG	REV
TL 58 V F160 Q		2:1	12/20/02	CB	P010683	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED