
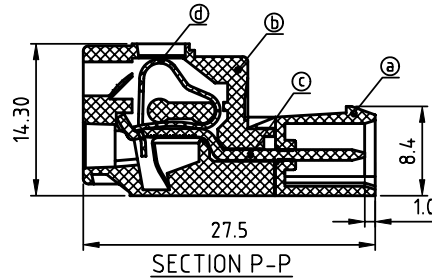
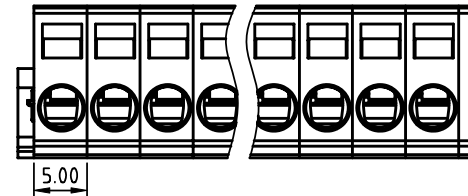
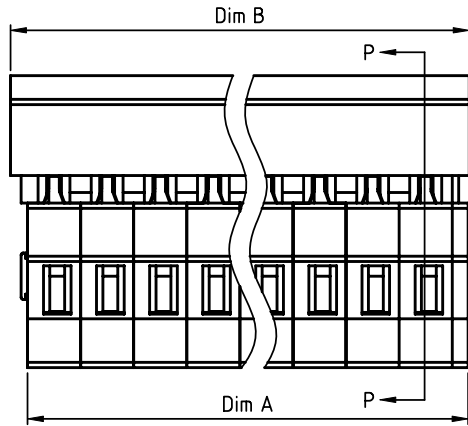


PRODUCT NUMBER	PITCH
NBxx70x000JOG	5.00 mm

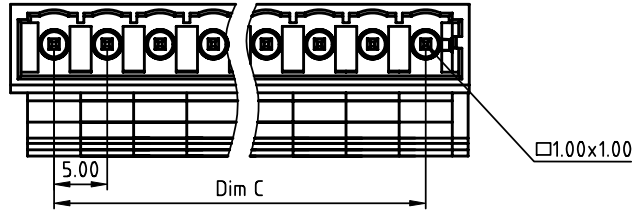

Material:

- Item (a) Top body: Thermoplastic (UL94 V-0)
- Item (b) Bottom body: Thermoplastic (UL94 V-0)
- Item (c) Male contact pin: Brass Tin plated
- Item (d) Spring clamp: Stainless steel

Electrical cULus

- Voltage rating: 300V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

N=Number of poles  
 Dim A=Nx5.0+1.5  
 Dim B=Nx5.0+3.2  
 Dim C=(N-1)x5.0

POLES	Tolerance
2p-6p	±0.20
7p-12p	±0.25
13p-18p	±0.30
19p-24p	±0.40

PART NO.: NB xx 7 0 x 0 00J0 G

Solid block	No. of poles	Color	RoHS compliant
0	2	Black (RAL9005)	(lead<4%) In copper Alloy
02	2 poles	Red (RAL3001/D)	
03	3 poles	Orange(RAL2011/P)	
4	...	Yellow(RAL1018/A)	
5	...	Green(RAL6018/T)	
6	24 poles	Blue (RAL5015/A)	
8		Grey(RAL7035/D)	
9		White(RAL1102)	
C		Green(RAL6018/U)	

mat'l. code		surface ASME Y14.5 ✓	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	MM	title TERMINAL BLOCK SPRING CLAMP, PLUGGABLE PLUG MALE CONNECTOR
		angles	X.±0.5	scale	dwg no NBxx70x000JOG
		X*±1°	X.XX±0.1		
		dr	EVIN ZHONG 051714		sheet 1 of 1
		enr	EVIN ZHONG 051714		size A4
		chr	HANKE FENG 051714		type CUSTOMER Drawing
		appd	SHI JUN 051714		
sheet index	revision	A	1		