



RECOMMENDED LAND PATTERN DIMENSION OF PCB  
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

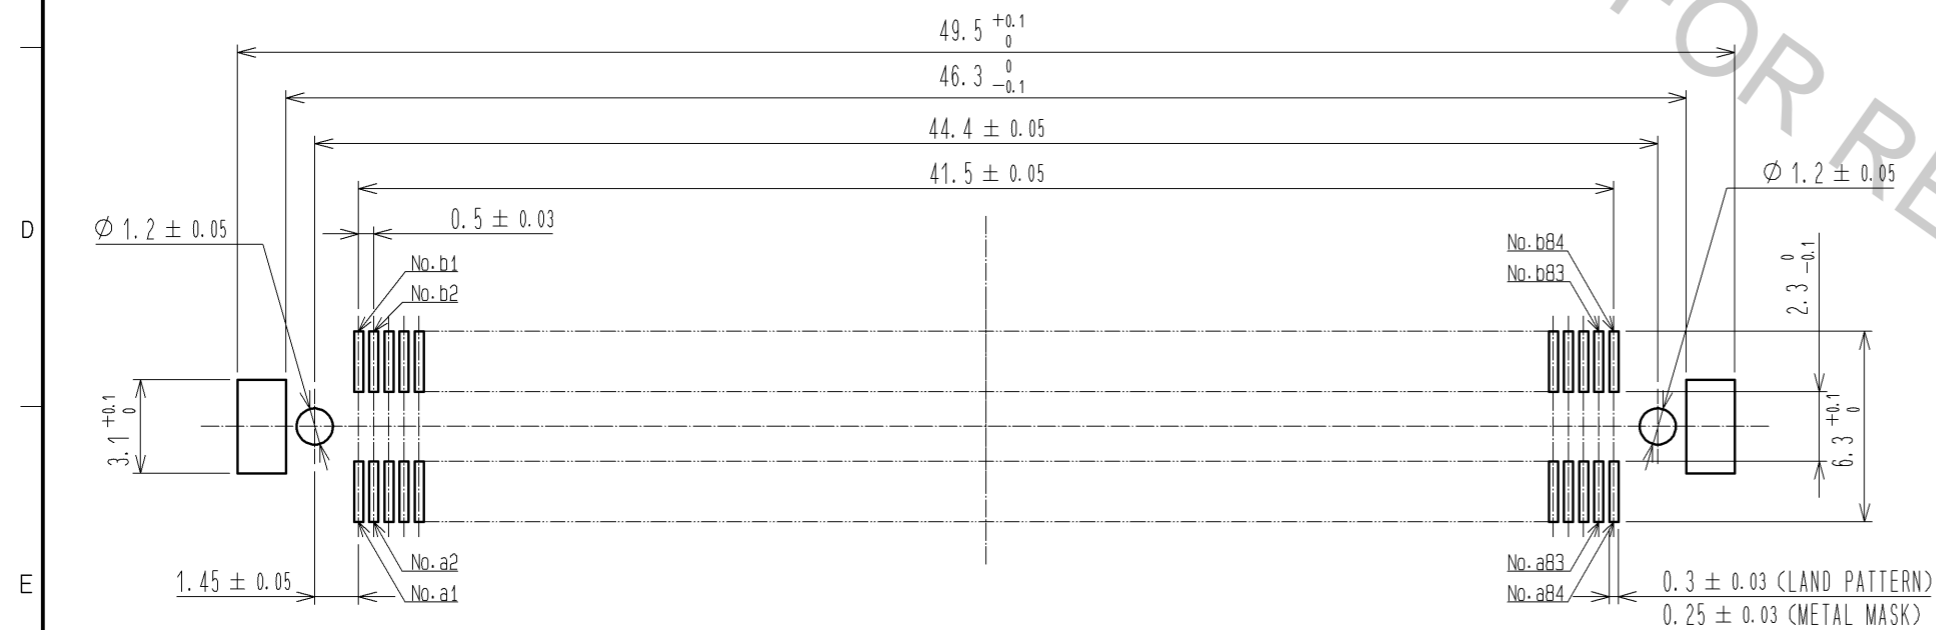

- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
  - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
  - 4 STACKING HEIGHT FROM LEAD TO LEAD(REFERENCE DIMENSIONS)
  - 5 BOARD DISTANCE
  - 6 AREA IS VACUUM PICKUP AREA FOR REFERENCE.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.76µm min.	4	PS	SURFACE AREA:GOLD 0.03µm min.			
		LEAD AREA:GOLD 0.03µm min.						
		UNDER PLATING:NICKEL 1.3µm min.						
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	UNDER PLATING:NICKEL 1.3µm min.			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		4 : 1						
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	13.03.28	DRAWING NO.		EDC3-151955-02		
		CHECKED : HT. YAMAGUCHI	13.03.28	PART NO.		FX10A-168P-SV(93)		
		DESIGNED : KJ. NISHIWAKI	13.03.28	CODE NO.		CL570-0044-8-93		
		DRAWN : CR. TAKESHIMA	13.03.28			1/2		

DRAWING FOR PACKING(2:1)

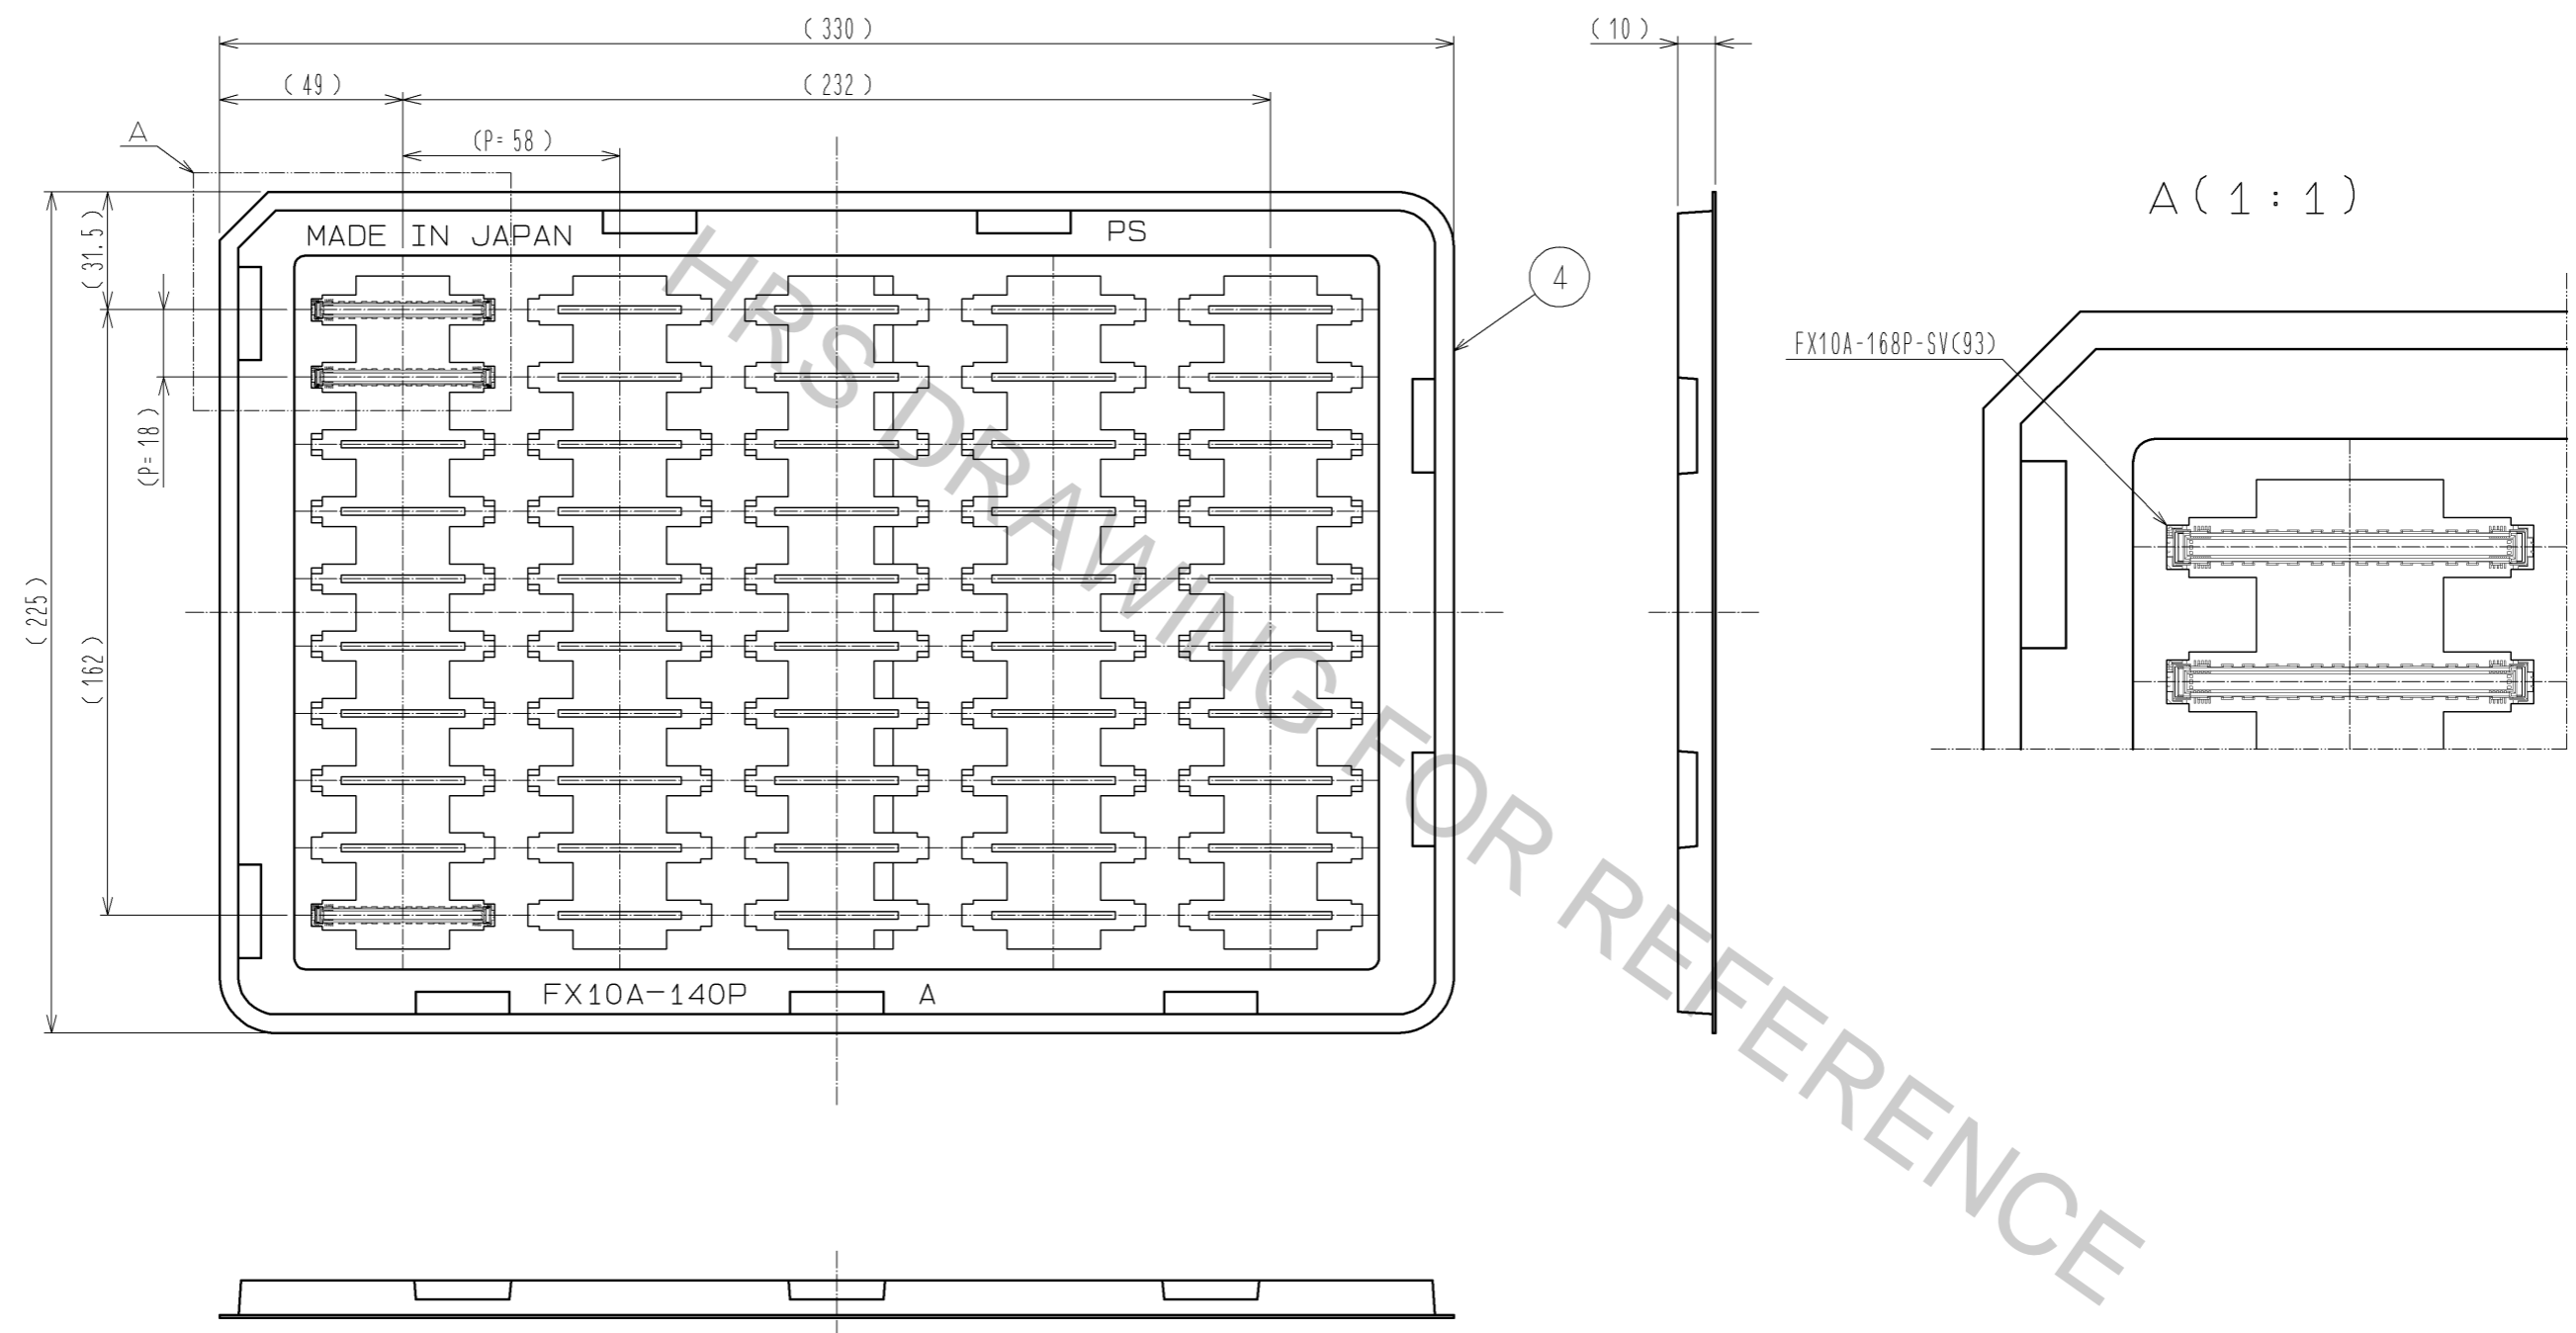

- NOTES 1 1TRAY:50 CONNECTORS.  
 2 THIS PRODUCT HAS NO POLARITY TO TRAY PACKAGING.  
 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

<b>HRS</b>	図番:	EDC3-151955-02	△ 2/2
	製品名:	FX10A-168P-SV(93)	
	製品コード:	CL570-0044-8-93	