
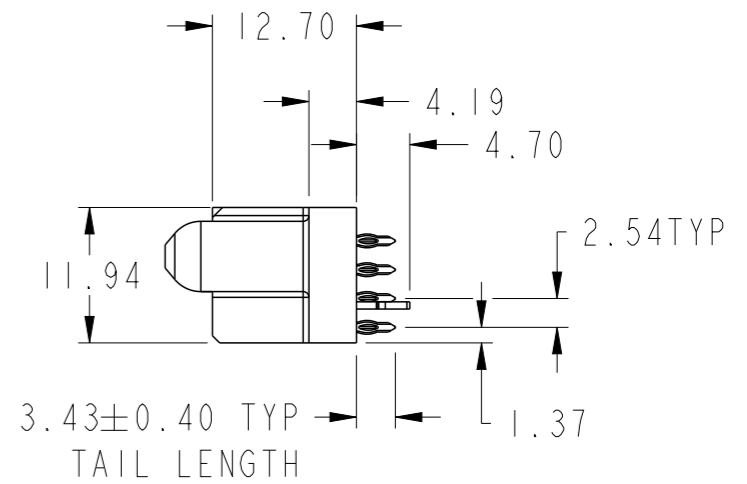
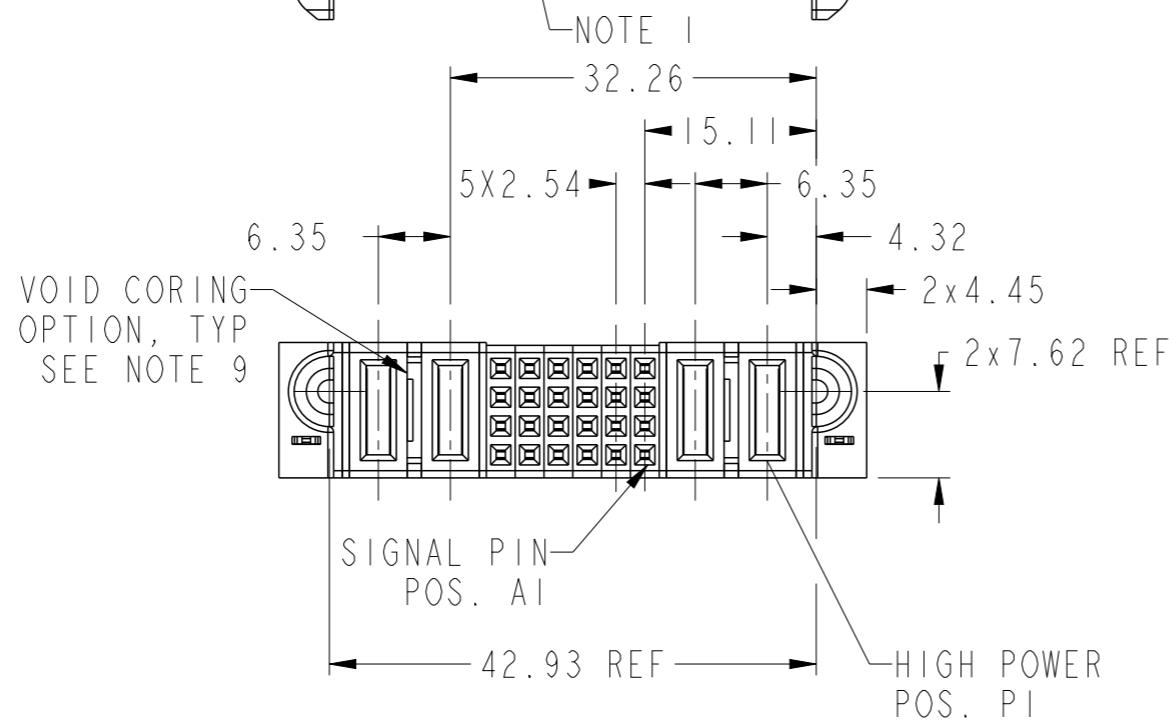
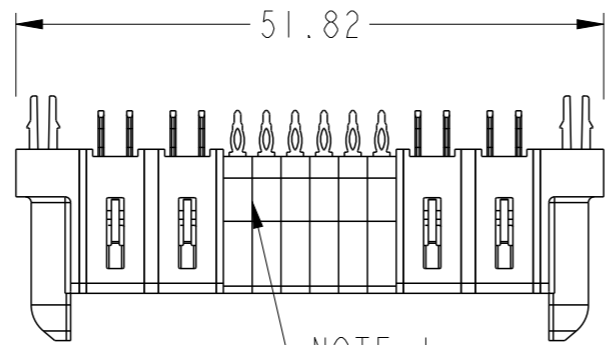


PRODUCT NUMBER SEE SHEET 2

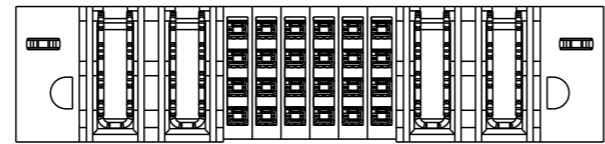

Copyright FCI.

spec ref		dr	Xie Bob	2013/08/06	projection	MM	size	A3	scale	3:2
tolerance std ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Xie Bob	2013/10/22	ecn no	ELX-DG-16104-1	
		chr	Li-He	2013/11/04	product family		PowerBlade+	rel level		
		appr	Pei-Ming Zheng	2013/11/04				Released		
surface	✓	linear	0.X	±0.50	www.fci.com	cat. no.	2HP + 24S + 2HP VT PF RECEPTACLE	dwg no	10106131-4006003	rev
			0.XX	±0.25						
			0.XXX	±0.10						
ASME Y14.5		angular	0°	±2°	Product - Customer Drw		sheet 1 of 3			

A

B

C

D

A

B

C

D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.



Copyright FCI.

dr	Xie Bob	2013/08/06	projection 	MM 	size	A3	scale	1:1	
eng	Xie Bob	2013/10/22			ecn no	ELX-DG-16104-1			
chr	Li-He	2013/11/04			product family	PowerBlade+	rel level	Released	
appr	Pei-Ming Zheng	2013/11/04							
		2HP + 24S + 2HP VT PF RECEPTACLE			dwg no	10106131-4006003		rev	B
www.fci.com		cat. no.	Product - Customer Drw			sheet 3 of 3			