



# 14GHz Surface Mount Highpass Filter

**H140XHXS**



DLI • Novacap • Syfer • Voltronics

www.dilabs.com

www.knowlesc capacitors.com

## DESCRIPTION

DLI's 14GHz highpass filter offers unmatched size and performance in a surface mount configuration. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

## FEATURES


- Small Size
- Frequency Stable over Temperature
- Solder Surface Mount Package
- Excellent Repeatability
- Operating Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

## SPECIFICATIONS\*

Parameter	Frequency Range	Min	Typ.	Max
3dB Cutoff	14 GHz			
Insertion Loss (dB)	14 - 28GHz		0.75	2
Return Loss (dB)		10	18	
Low Side Rejection (dB)	DC - 9.5GHz	30	38	
Input Power (W)	-			TBD

\*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

## Typical Measured Performance

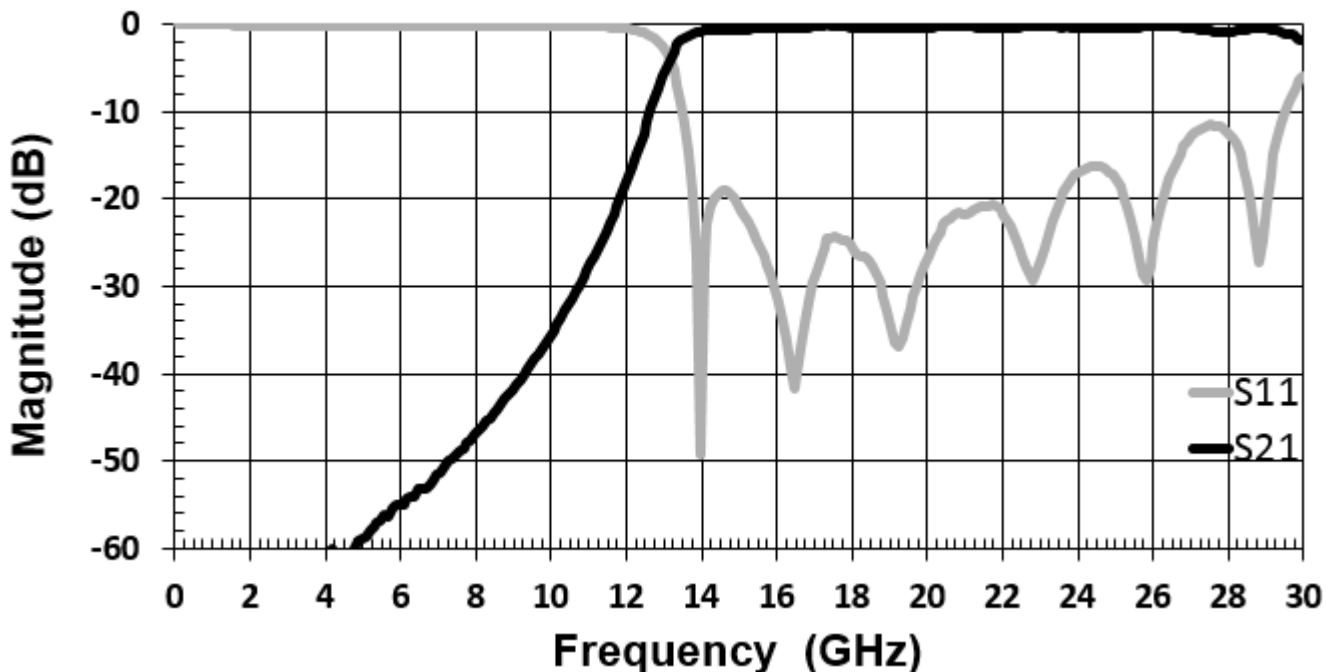



# 14GHz Surface Mount Highpass Filter



**H140XHXS**



DLI • Novacap • Syfer • Voltronics


www.dilabs.com

www.knowlesc capacitors.com

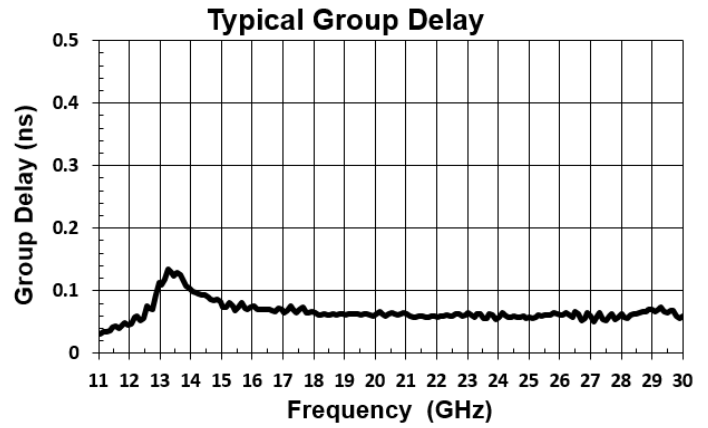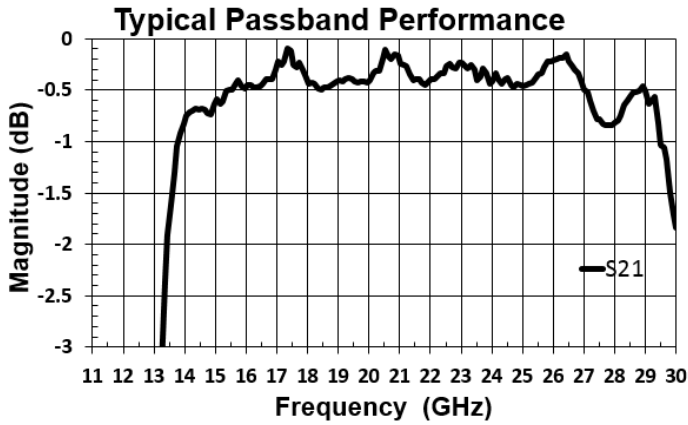


## Physical Dimensions

Units = inches

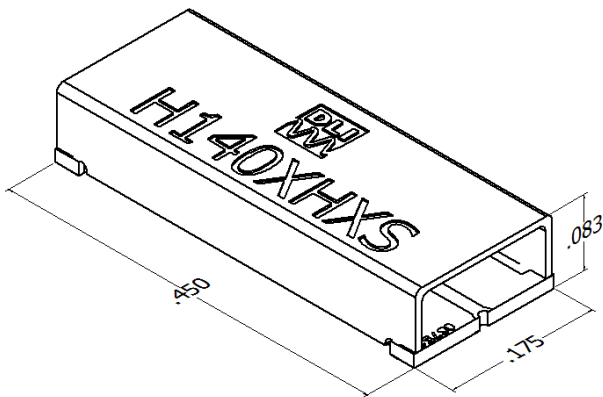


Isometric View

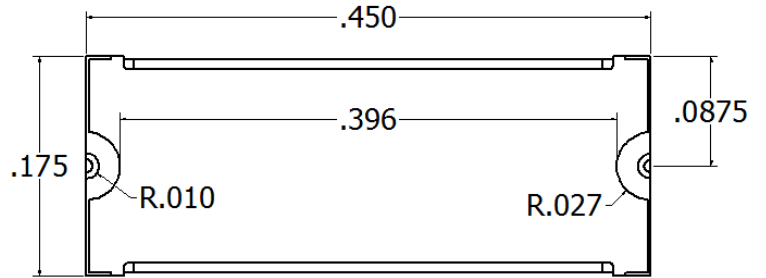

Bottom View

## Recommended PCB Layout

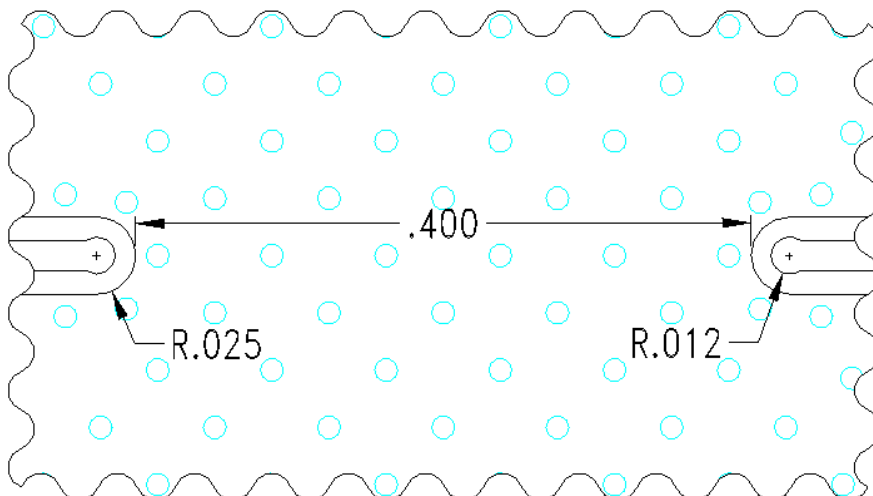

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.



2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710 | KCCSales@knowles.com

May 2016