
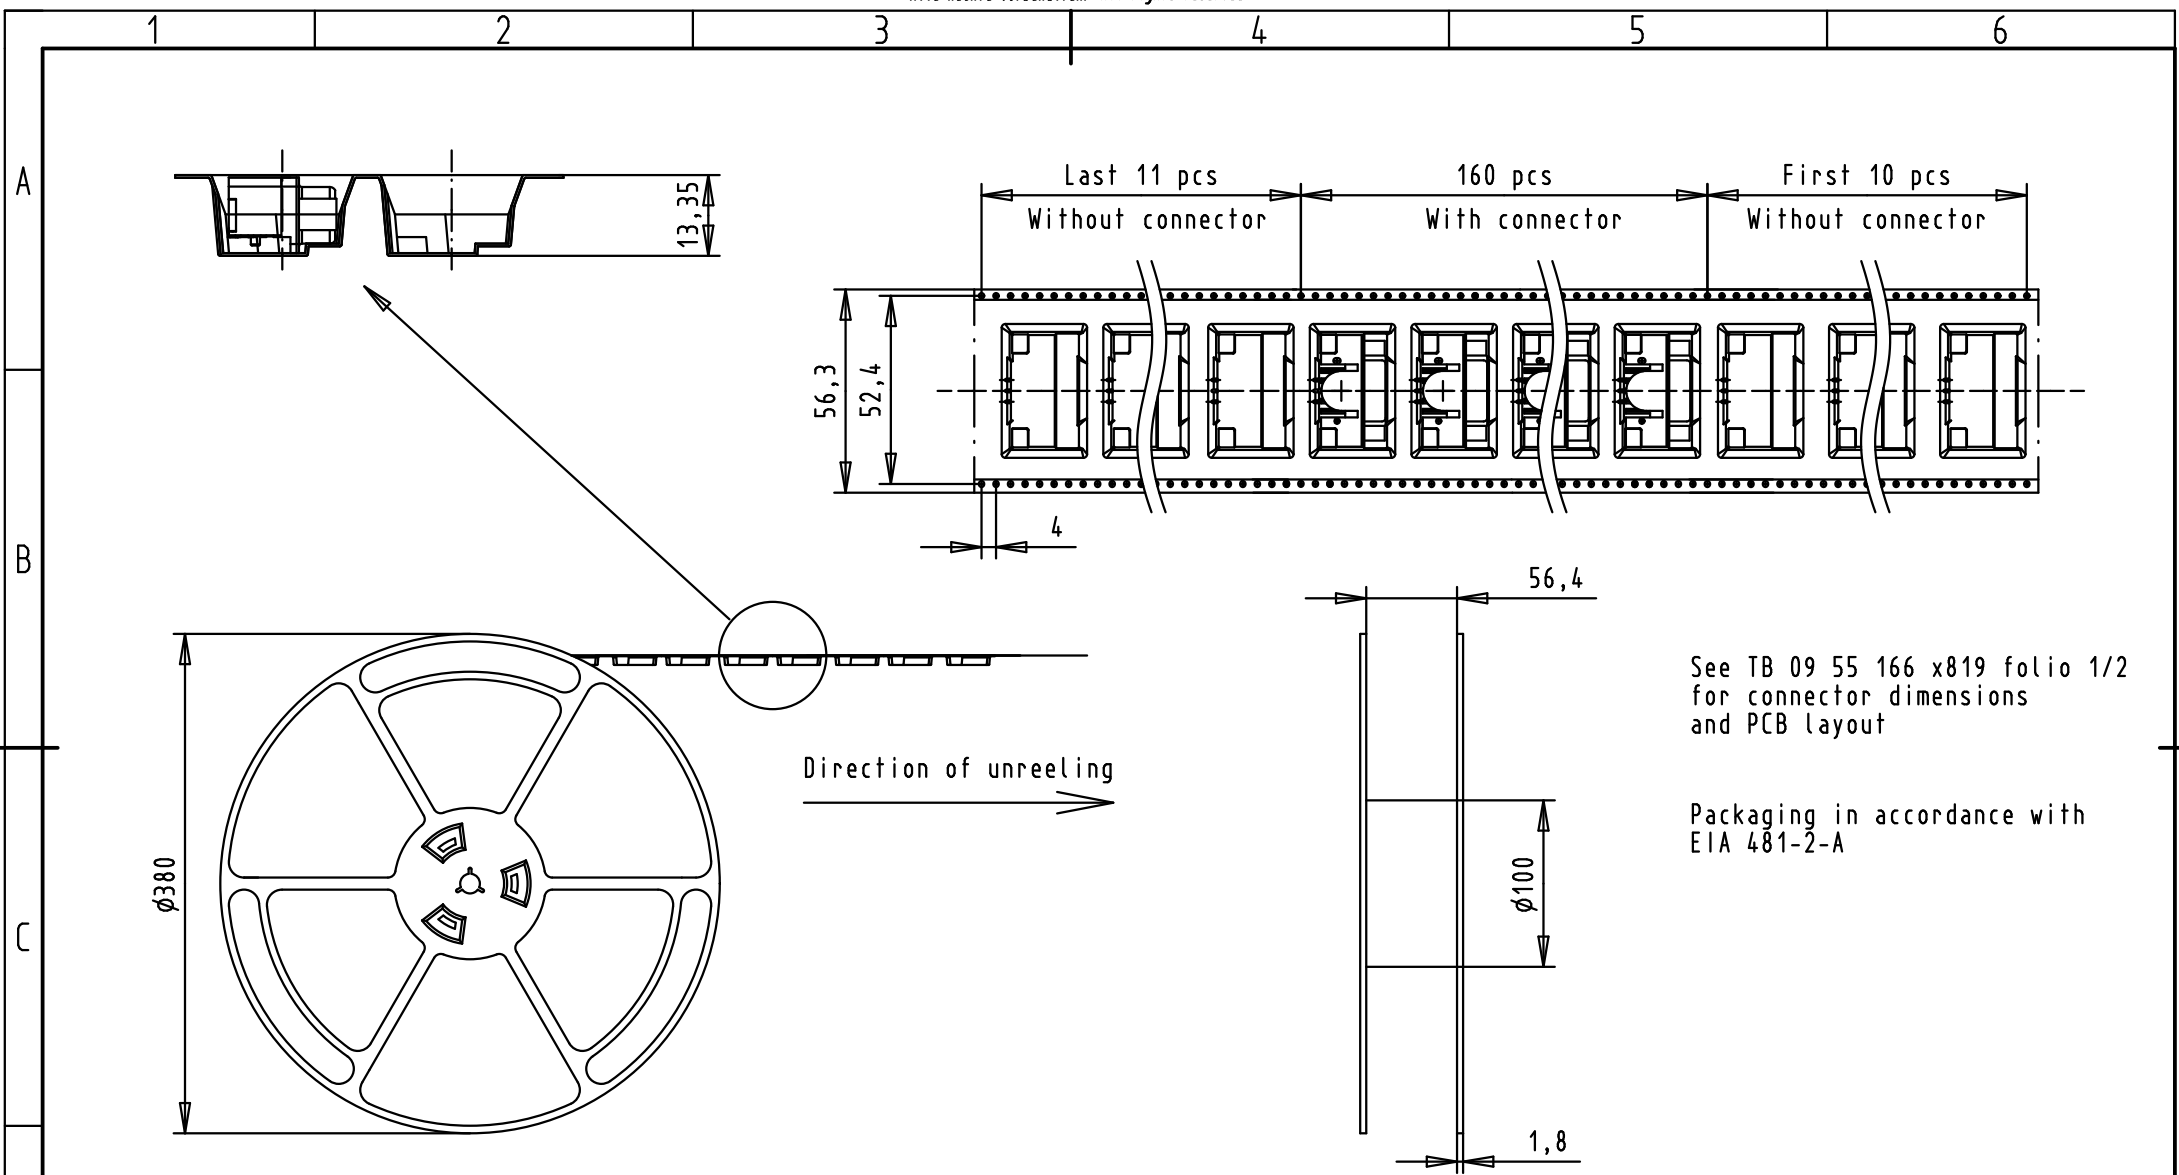


PCB Layout, component side (thickness 1.6 mm min.)

Max. Temperature : 260° during 10 seconds


							 All Dim. in mm Orig. Size DIN A 4		D-SUB SMT Low Profile Male 9p with die casted grounds and M3 unremovable screwlocks		Maßstab/ Scale 1,5:1
							Detail. 28Aug2009 ED				
							Insp.				
							Stand.				
							EC01215 14Jan2010 ED		HARTING EURL F-95972 Paris		Blatt/ Page 1 / 2
							EC00775 28Aug2009 ED				
09551663819.741	1	M3	Black Insulator	Reel Packaging (160 connectors) see page 2/2	Mod.	Dat.	Name	TB 09 55 166 x819 Sub.			
09551666819.741	2				Mod.	Dat.	Name				
09551667819.741	3				Mod.	Dat.	Name				
Part number	PL	Thread	Index designation	Mod.	Dat.	Name					





See TB 09 55 166 x819 folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2-A

				Mod.	Dot.	Name		D-SUB SMT Low Profile Male 9p with die casted grounds and M3 unremovable screwlocks	Maßstab/ Scale Blatt/ Page 2 / 2
				EC01215	14Jan2010	ED			
				EC01118	26Nov2009	LP			
				EC00775	28Aug2009	ED			
09551663819.741	1	M3	Black Insulator	Reel Packaging (160 connectors)			HARTING EURL F-95972 Paris		TB 09 55 166 x819 Sub.
09551666819.741	2								
09551667819.741	3								
Part number	PL	Thread	Index designation		Mod.	Dot.	Name		

