THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	ECR/ECO
AD	25

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	REL. PER N.P.R. 88 5620 034 1	7-26-95	SH	DLH
	A	PER EC 1687-95	3-25-96	TS	DH
	B	REV PER EC 0U18-0C15-01	25 JAN 01	BC	WM

1. MATERIAL: HOUSING - GLASS FILLED POLYESTER, COLOR - BLACK. CONTACT - COPPER ALLOY. STIFFENER ALUMINUM.
2. FINISH: 0.00127 [.00005"] MIN. THICK NICKEL UNDERPLATE ALL OVER, WITH 0.00076 [.00003"] MIN. GOLD ON MATING AREA, TIN-LEAD ON TAILS.
3. RECOMMENDED MOUNTING SCREW IS A BINDING HEAD #2 THREAD FORMING TYPE AB THREADS; STAINLESS STEEL. MAXIMUM SPACING OF 38.10 [1.500] INCHES.
4. AMP, AMP PART NUMBER AND DATE CODE MARKED IN THIS, APPROXIMATE AREA SHOWN.

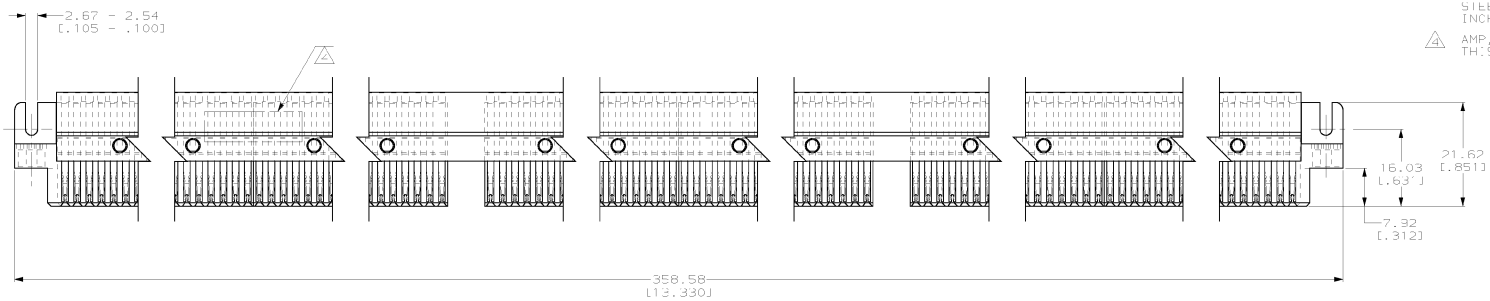

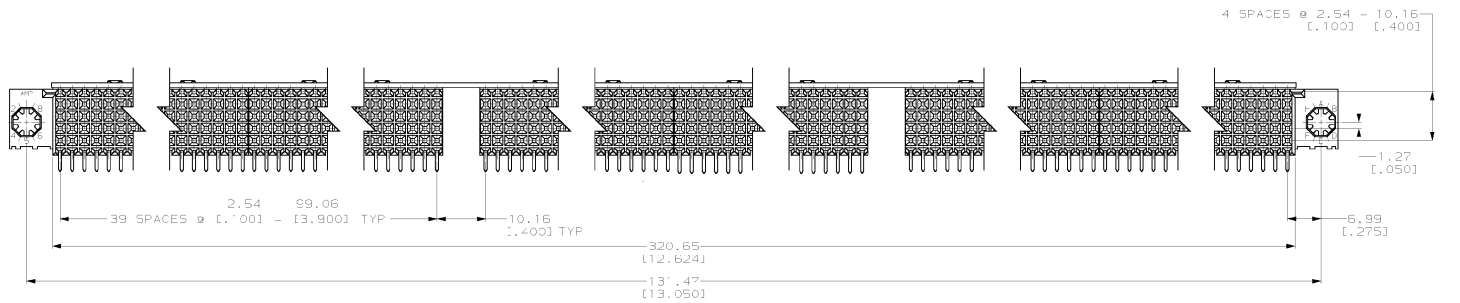

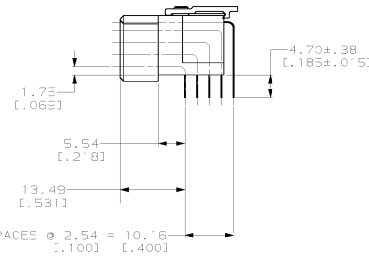

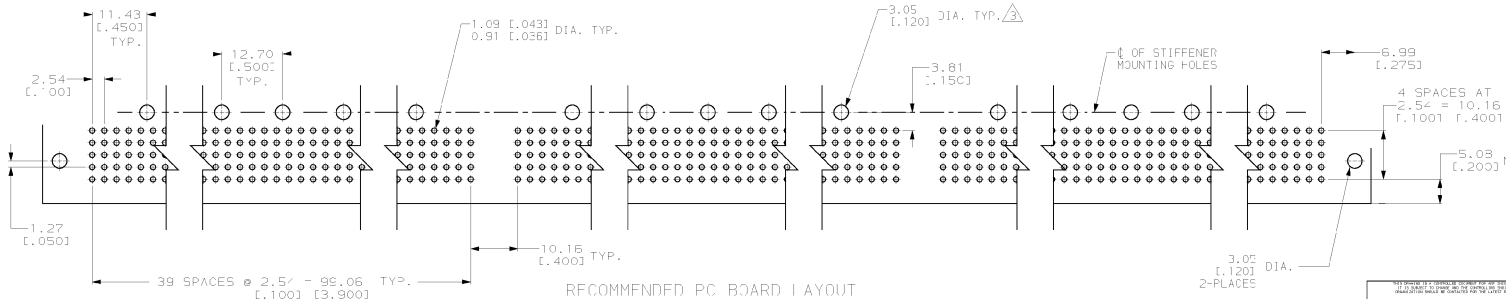

RECOMMENDED PC BOARD LAYOUT

DRAWN	M. HAMPTON	7-26-95	AMP Incorporated, Harrisburg, PA 17105-3608
CHK	W. MILLHIMES	7-26-95	
APVD	W. MILLHIMES	7-26-95	
PRODUCT SPEC	–		RECEPTACLE ASSEMBLY, TBC PLUS, MODULAR, 5 ROW, 720 POSN.
APPLICATION SPEC	–		
WEIGHT	–		
CUSTOMER DRAWING			SIZE A1 · CAGE CODE 00779 · DRAWING NO C-650692 · SCALE 2:1 · SHEET 1 OF 1 · REV B

DIMENS (MM) [INCHES]
GAGE/GRES (MFGR) STANDARD SPECIFIED
0 PLC ±–
1 PLC ±.1
2 PLC ±–
3 PLC ±.005
4 PLC ±–
ANGLES ±–
MATERIAL 1 2
FINISH 3

AMP 4805 REV 09FAY94

PS JAN 01 11:51:39 app/0073 /home/amp4805/drawing