
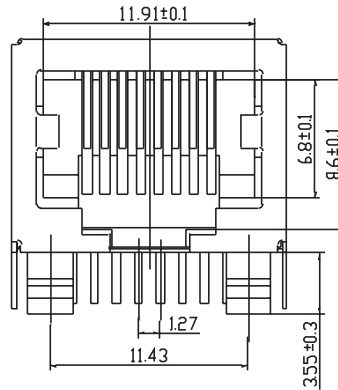


PCB LAYOUT - COMPONENT VIEW

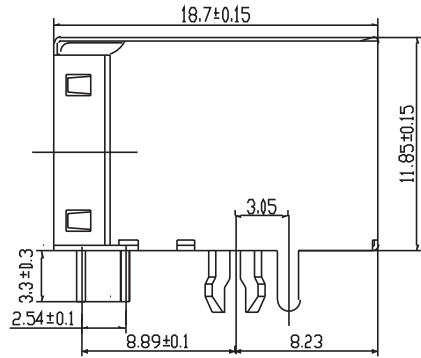

TECHNICAL CHARACTERISTICS

INSULATOR: PBT  
 FLAMMABILITY RATING: UL94-V0  
 COLOR: BLACK  
 CONTACT MATERIAL: PHOSPHOR BRONZE  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: GOLD  
 SHIELDING: BRONZE NI PLATED  
 QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 TO 85°C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 1.5A  
 WORKING VOLTAGE: 120VAC  
 INSULATOR RESISTANCE: >1000 MΩ  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC/MIN  
 CONTACT RESISTANCE: 20 mΩ MAX

STANDARD  
 CERTIFIED: E324776

SOLDERING:  
 JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING  
 TRAY

RoHS Compliant			
G			
F			
E	03-JAN-14	UL & TEMP UPDATE	QL
D	20-AUG-13	DIM UPDATE	QL
C	05-JUL-12	DIM	GG
B	06-OCT-09	UL STANDARD	JP
A	06-NOV-07	PDF	EC
REV	DATE	FILE	BY

PROJECTION:



APPROVAL: RJ

TOLERANCES UNLESS OTHERWISE SPECIFIED  
 0~10 ±0.1  
 10~20 ±0.15  
 20~30 ±0.2

UNIT: MM  
 SCALE:  
 SHEET: 1/1  
 DRAW:



DESCRIPTION: SHIELDED 3.05mm FRONT GROUNDING POST 8P8C  
 MODULAR JACK TAB DOWN

WERI PART NO: 615 008 140 121

SIZE  
**A4**