

1 2 3 4 5 6 7

A

A

B

B

C

C

D

D

E

E

F


F

G



G

H


H

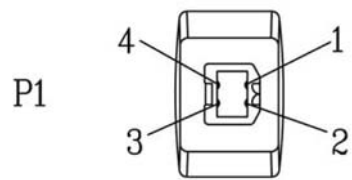

USB B MALE

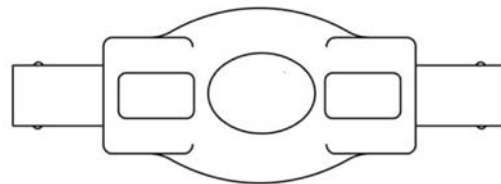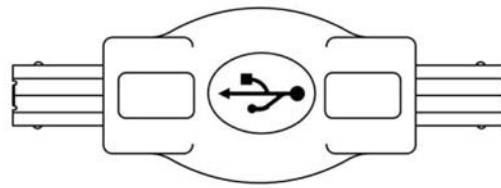

(TAD-0018)

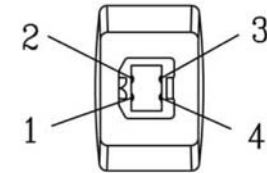

USB B MALE

**PIN OUT**

P1		P2
1	_____	1
2	_____	2
3	_____	3
4	_____	4
SHELL	_____	SHELL

**Material:**

- Hook up wire: Non-UL 26AWG
- Connector: P1 & P2: USB B Male Gold Flash Contact
  - Nickel Plated Shell
  - Plastic: White
- Hood: Molded Type PVC 45P Color: Beige(NK-A03)

**Electrical:**

- 100% Open, short & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 5Ω Min.

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
				Modification	Date	Name		

**Item No.**  
**A-USB-6-R**

**Title**  
USB Adapter, B Male to B Male

**Drawing No.**  
\_\_\_\_\_

**rev00**

**Replace**  
\_\_\_\_\_

**Sheet**  
\_\_\_\_\_



1 2 3 4 5 6 7