

## Type 2 surge protection device - VAL-MS 320/3+0 - 2920230

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge arrester for 4-conductor power supply systems (L1, L2, L3, PEN), consisting of a base element and protective connectors, for mounting on NS 35.

The illustration shows the version VAL-MS 320/3+0/FM

### Product Features

- With or without floating remote indication contact
- Type 2 consistent plug-in surge arresters
- Optical, mechanical status indication for the individual arresters
- Mechanical coding of all slots
- Disconnect device on each individual plug
- Multi-channel type 2 arresters



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	351.3 GRM
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	90 mm
Width	53.4 mm
Depth	58 mm
Horizontal pitch	3 Div.

#### Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C

# Type 2 surge protection device - VAL-MS 320/3+0 - 2920230

## Technical data

### Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	25g
Vibration (operation)	5g

### General

Standards/specifications	IEC 61643-11 2011
	EN 61643-11 2012
IEC test classification	II
	T2
EN type	T2
Number of ports	One
SPD design	Voltage-limiting type
Mode of protection	L-PEN
Mounting type	DIN rail: 35 mm
Color	black
Housing material	PA 6.6
	PBT
Pollution degree	2
Inflammability class according to UL 94	V-0
Type	DIN rail module, two-section, divisible
Number of positions	3
Surge protection fault message	Optical

### Protective circuit

Nominal voltage $U_N$	240/415 V AC (TN-C)
Nominal frequency $f_N$	50 Hz (60 Hz)
Maximum continuous operating voltage $U_C$ (L-PEN)	335 V AC
Rated load current $I_L$	80 A
Residual current $I_{PE}$	≤ 1.35 mA
Standby power consumption $P_C$	≤ 450 mVA
Nominal discharge current $I_n$ (8/20) $\mu$ s (L-PEN)	20 kA
Maximum discharge current $I_{max}$ (8/20) $\mu$ s (L-PEN)	40 kA
Short-circuit current rating $I_{SCCR}$	25 kA
Voltage protection level $U_p$ (L-PEN)	≤ 1.5 kV
Residual voltage $U_{res}$ (L-PEN)	≤ 1.5 kV (at $I_n$ )
	≤ 1.3 kV (at 10 kA)

## Type 2 surge protection device - VAL-MS 320/3+0 - 2920230

### Technical data

#### Protective circuit

	≤ 1.2 kV (at 5 kA)
	≤ 1.1 kV (at 3 kA)
TOV behavior at $U_T$ (L-PEN)	415 V AC (5 s / withstand mode)
	440 V AC (120 min / safe failure mode)
Response time $t_A$ (L-PEN)	≤ 25 ns
Max. backup fuse with branch wiring	125 A AC (gG)
Max. backup fuse with V-type through wiring	80 A AC (gG)

#### Connection data

Connection method	Screw connection
Conductor cross section stranded min.	1.5 mm <sup>2</sup>
Conductor cross section stranded max.	25 mm <sup>2</sup>
Conductor cross section solid min.	1.5 mm <sup>2</sup>
Conductor cross section solid max.	35 mm <sup>2</sup>
AWG conductor cross section	15 ... 2
	10 ... 2 (UL)
Screw thread	M5
Tightening torque	4.5 Nm
	30 lb <sub>F</sub> -in. (UL)
Stripping length	16 mm

#### UL specifications

UL class	Type 4 SPD for Type 2 applications
Maximum continuous operating voltage MCOV (L-G)	320 V AC
Nom. voltage	240 V AC
Mode of protection	L-L
	L-G
Power distribution system	3D
Nominal frequency	50/60 Hz
Voltage protection rating VPR (L-L)	2 kV
Voltage protection rating VPR (L-G)	1.2 kV
Nominal discharge current $I_n$ (L-L)	20 kA
Nominal discharge current $I_n$ (L-G)	20 kA

### Classifications

eCl@ss

eCl@ss 4.0	27140201
------------	----------

## Type 2 surge protection device - VAL-MS 320/3+0 - 2920230

### Classifications

#### eCl@ss

eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130805
eCl@ss 7.0	27130805
eCl@ss 8.0	27130805

#### ETIM

ETIM 2.0	EC000941
ETIM 3.0	EC000941
ETIM 4.0	EC000941
ETIM 5.0	EC000941

#### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

### Approvals

#### Approvals

---

#### Approvals

UL Recognized / KEMA-KEUR / ÖVE / cUL Recognized / GOST / CCA / IECCEB Scheme / KEMA-KEUR / ÖVE / CSA / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details


UL Recognized 
---

## Type 2 surge protection device - VAL-MS 320/3+0 - 2920230

### Approvals


KEMA-KEUR 

ÖVE 

cUL Recognized 

GOST 

CCA

IECEE CB Scheme 

KEMA-KEUR 

ÖVE 


CSA

cULus Recognized 


### Drawings

## Type 2 surge protection device - VAL-MS 320/3+0 - 2920230

Dimensioned drawing

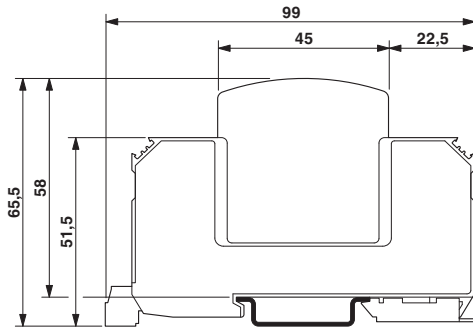

Circuit diagram



The illustration shows the dimensional drawing for a version with remote indicator contact