


PIN ASSIGNMENT	
P1	P2
1	5
2	1
4	3
5	4
SHELL	SHELL

- Electrical test:**
1. 100% short, open, miss wire test
  2. Conduct resistance: 2 Ohm(max)
  3. Insulation resistance: 5Mohm(min)
  4. Dielectric test: DC 300V

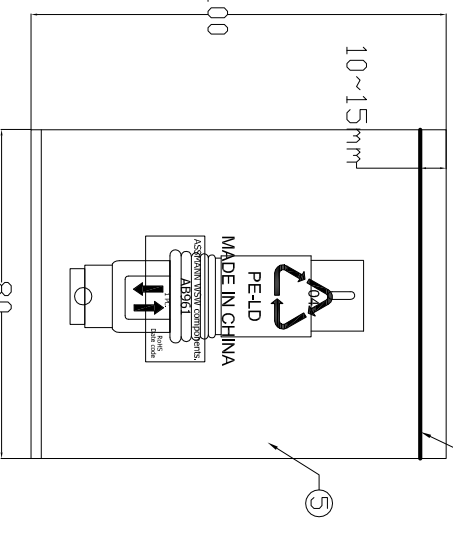

⑥	PE BAG	1/10	CLEAR SIZE: 170*250*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑤	PE BAG	1	CLEAR SIZE: 80*100*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
④	IN JACKET	20g	CLEAR LD-PE (Mould NO.: NM-69)
	OUT JACKET	50g	BEIGE(IV-29) 40P PVC(Mould NO. WM-156)
③	CONN	1	MINI DIN 6P FEMALE SOLDER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR: BLACK
②	CONN	1	DIN 5P MALE SODDER TYPE PIN SHELL NI-PLATED INSULATOR COLOR: BLACK
①	CABLE	155mm	UL1007 26AWG JACKET BLACK L1=30mm*4C L2=35mm*1C
NO.	NAME	Q'TY	SPECIFICATION

1PCS/BAG

**RoHS compliant**  
Unit: mm

Scale	Free	Customer-No.	
TOLERANCE		Drawn	20.02.2017
		Approved	20.02.2017
DIM	TOL		
Angle	TOL		
Id.	Modification	Date	Name
①	Drawn	20.02.2017	Amy



Customer-No.	ASSMANN WSW-No.	AB961
Drawing-No.	ASS 7873 CA	rev00
Replace		Sheet