


ECN #	APPRVD.	DATE	REV.
/			

Ground Terminal  
# 8-32 Screw  
(2 Places)

Phoenix VDFK6  
(6 Places)

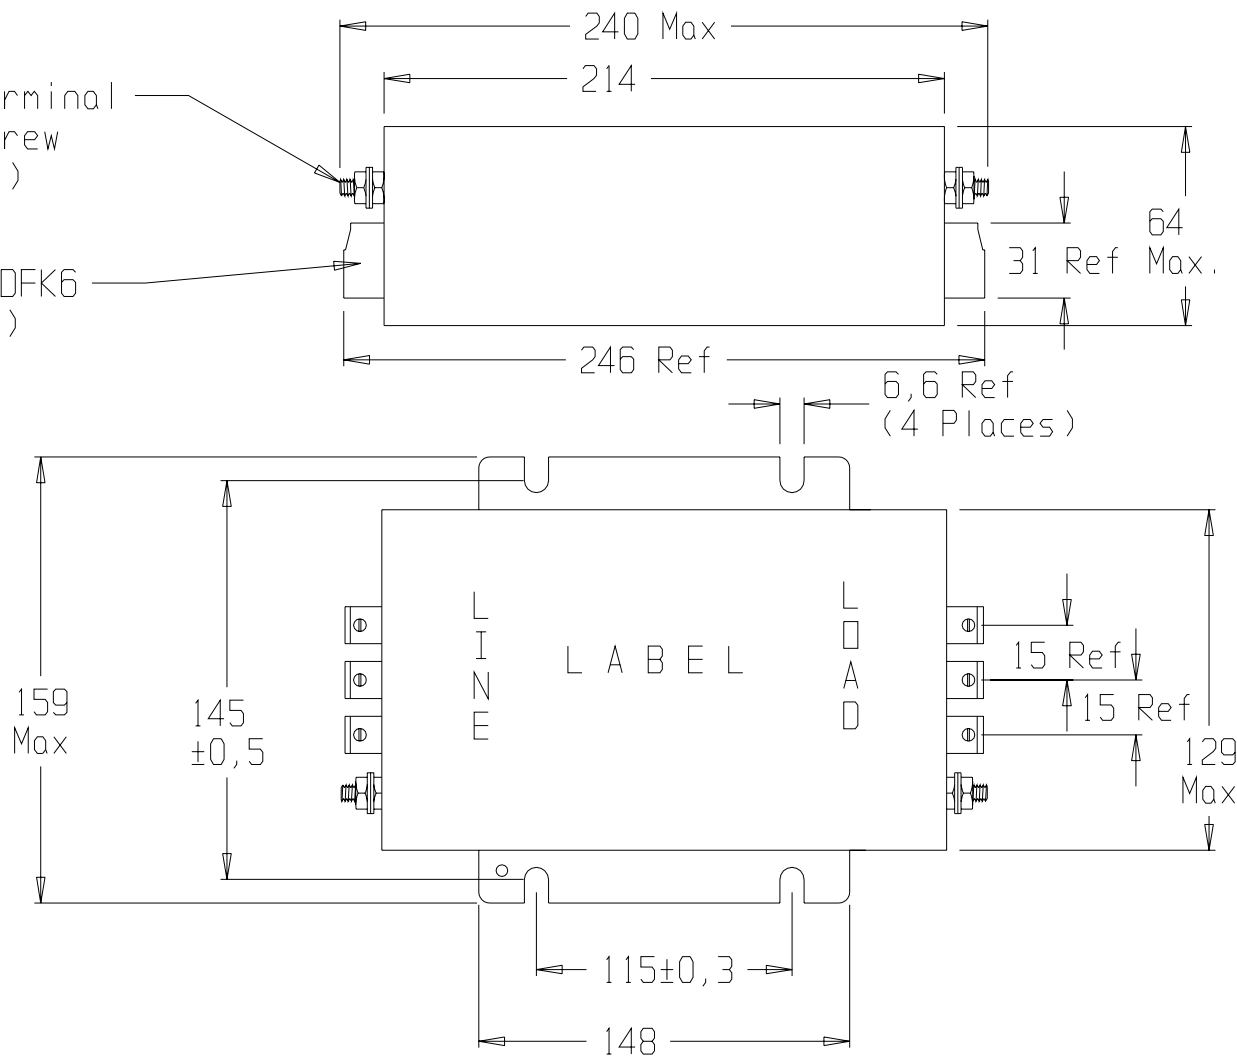

SPECIFICATION


25Amp /40°C 50-60Hz

440VAC Phase to Phase  
250VAC Phase to Neutral/Gnd

ATTENUATION


Comm.Mode - 70dB $\mu$ V at 100kHz  
Dif.Mode - 80dB $\mu$ V at 100kHz

EQUIVALENT SCHEMATIC MEASURED AT 1kHz

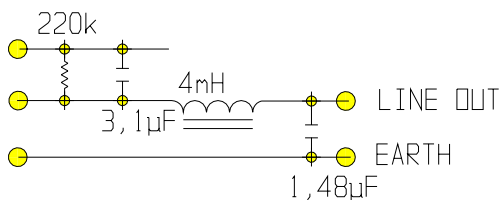

Max. Leakage current at 10% unsymmetrical mains, each Line to Ground:  
2,5mA at 120V 60Hz  
4,3mA at 250V 50Hz

THIRD ANGLE PROJECTION



This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S order or prior written consent.



RFI FILTER

CAD FILE:   cde\prt\cd\F7751		DRG. NO.	REV.
SCALE: .34	DATE: 2-12-96	25FCD10	00
DRW. BY: MS	DRIG: MS		