

REV. C
DCO 300855


TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
 RESISTANCE _____ 320 OHMS $\pm 10\%$
 NOMINAL VOLTAGE _____ 28 VDC
 MUST OPERATE _____ 13.5 VDC MAX.
 _____ TRANSIENT SUPPRESSION - 42 VDC MAX.
 MUST RELEASE _____ 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:
 VIBRATION _____ 33 Hz TO _____ 3000 Hz @ _____ 30 g's
 SHOCK _____ 200 g's _____ 6 MS. DURATION
 TEMPERATURE _____ -70 °C TO _____ +125 °C

NOTES: OPERATE, RELEASE 10 MS MAX.
 CONTACT BOUNCE 1 MS MAX.
 CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

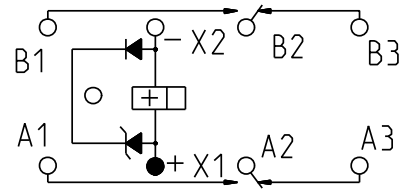

TERMINAL VIEW

CONTACT RATING: _____
 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.
 100,000 OPERATIONS

DR. B.D. 07MAR2008 | CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG ITEM
 CUST. NO. _____ REV. _____

TE NUMBER
 8-1617751-1

CII PART NUMBER
 FCA-210-AY4