




Technical Data Sheet for NL1023T

Single-Stage Thermoelectric Module

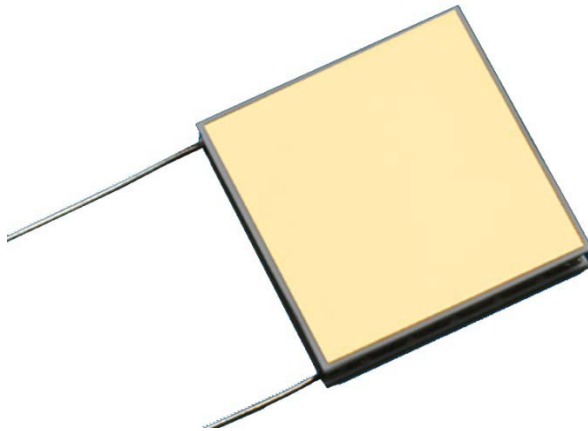

NOMINAL PERFORMANCE IN NITROGEN

Hot Side Temperature (°C)	27	50
ΔT_{max} (°C):	64	73
Q _{max} (watts):	9.2	10.5
I _{max} (amps):	1.8	1.8
V _{max} (vdc):	8.0	9.0
AC Resistance (ohms):	3.86	--
Device ZT	0.77	--

PRODUCT FEATURES

- RoHS EU Compliant
- Rated operating temperature of 130°C.
- Pre-tinned metallized ceramic surface(s) with 138°C solder, option available.

ORDERING OPTIONS

Model Number	Description
NL1023T-01AC	TEM, Top and Base Metallized Exterior
NL1023T-02AC	TEM, Base Metallized Exterior
NL1023T-03AC	TEM, No Metallized Exterior
NL1023T-04AC	TEM, Top and Base Pre-Tinned with 138 °C Solder

OPERATION CAUTIONS

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

INSTALLATION

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEM Installation Guide.

II-VI Marlow – Dallas, TX USA
214-340-4900
877-627-5691
marlow.sales@ii-vi.com

Marlow Industries Europe
GmbH - Germany
+49 (0) 6150 5439 - 403
info@marlow-europe.eu



II-VI Japan Inc.
81 43 297 2693 (tel)
center@ii-vi.co.jp
www.ii-vi.co.jp

II-VI Singapore Pte., Ltd.
(65) 6481 8215 (tel)
info@ii-vi.com.sg




Marlow Industries China, II-VI
Technologies Beijing
86-10-643 98226
info@iivbj.com



ENVIRONMENT: ONE ATMOSPHERE DRY NITROGEN

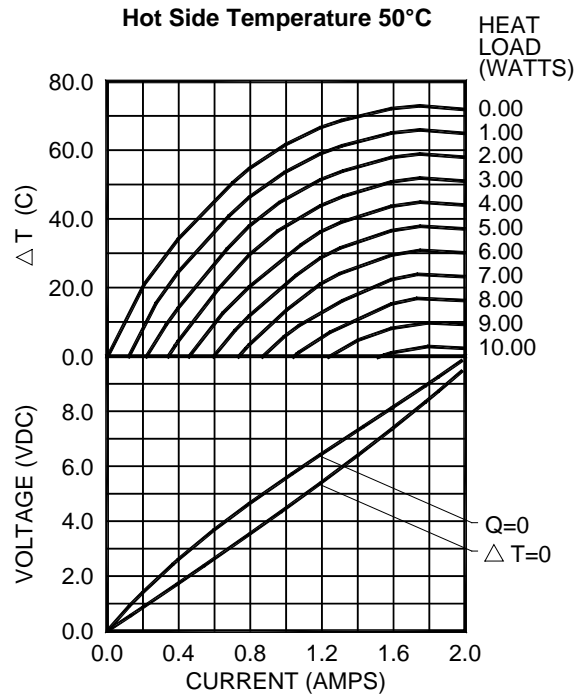
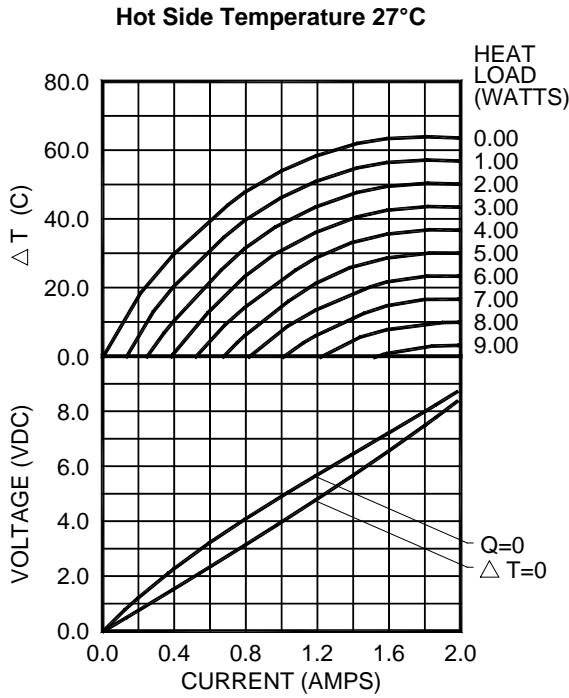


POWER GENERATION PERFORMANCE CURVES

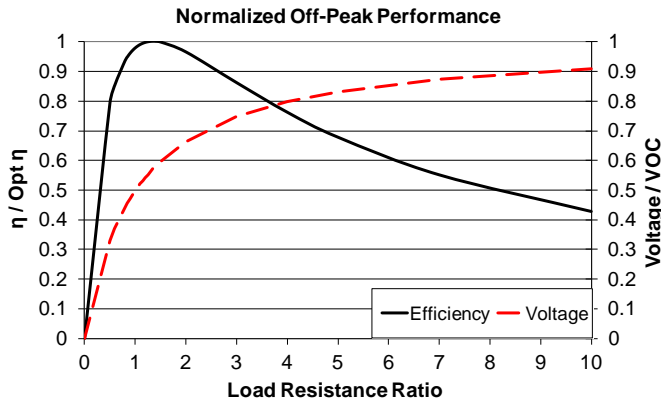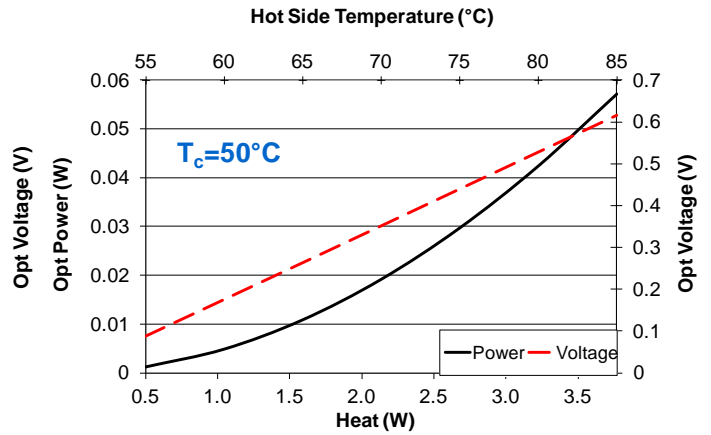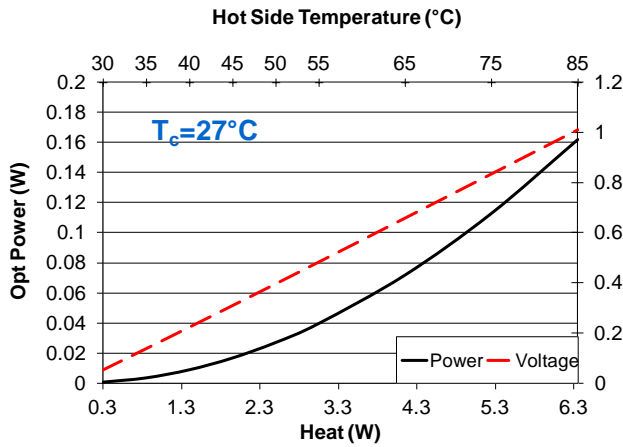


Hot Side Temperature (°C)	85	55	35
Cold Side Temperature (°C)	27	27	27
Optimum Efficiency, η (%)	2.53	1.28	0.37
Optimum Power (W)	0.162	0.039	0.003
Optimum Voltage (V)	1.011	0.482	0.136
Load Resistance for Opt η (Ω)	6.32	5.91	5.62
Open Circuit Voltage, VOC (V)	1.77	0.85	0.24
Short Circuit Current (A)	0.37	0.19	0.06
Thermal Resistance (°C/W)	9.09	9.09	9.06

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, contact one of our Applications Engineers at 877-627-5691.

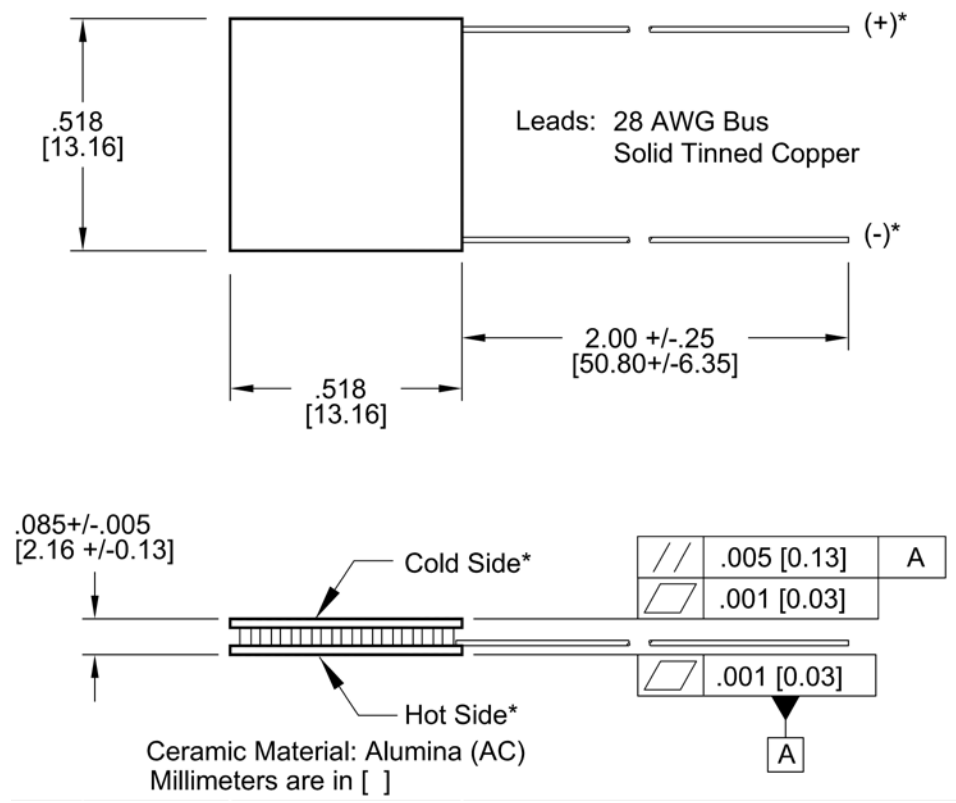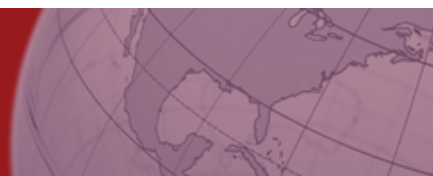

***NOTE: Cold side, hot side, positive leads, and negative leads are valid only for thermoelectric cooling. For power generation, refer to figure below.**

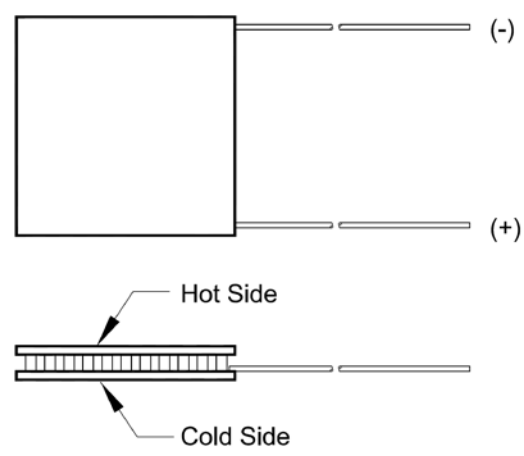

For customer support or general questions please contact a local office or visit our website at www.marlow.com. Marlow reserves the right to make product changes without notice.