


## PowerPAD-20/PowerSOIC-20 to DIP-24 SMT Adapter (1.27 mm pitch, 300 mil body)

| REF. | DIMENSIONS |       |      |        |       |      |
|------|------------|-------|------|--------|-------|------|
|      | mm         |       |      | inches |       |      |
|      | MIN.       | TYP.  | MAX. | MIN.   | TYP.  | MAX. |
| A    |            | 7.65  |      |        |       |      |
| B    |            | 2.00  |      |        |       |      |
| C    |            | 0.70  |      |        |       |      |
| B2   |            | 3.30  |      |        |       |      |
| C2   |            | 3.90  |      |        |       |      |
| D    |            | 0.57  |      |        |       |      |
| D2   |            | 2.175 |      |        |       |      |
| E    |            | 1.27  |      |        |       |      |
| F    |            |       |      |        | 0.600 |      |
| G    |            |       |      |        | 0.100 |      |
| H    |            |       |      |        | 0.025 |      |

Top View (SMT Footprint)

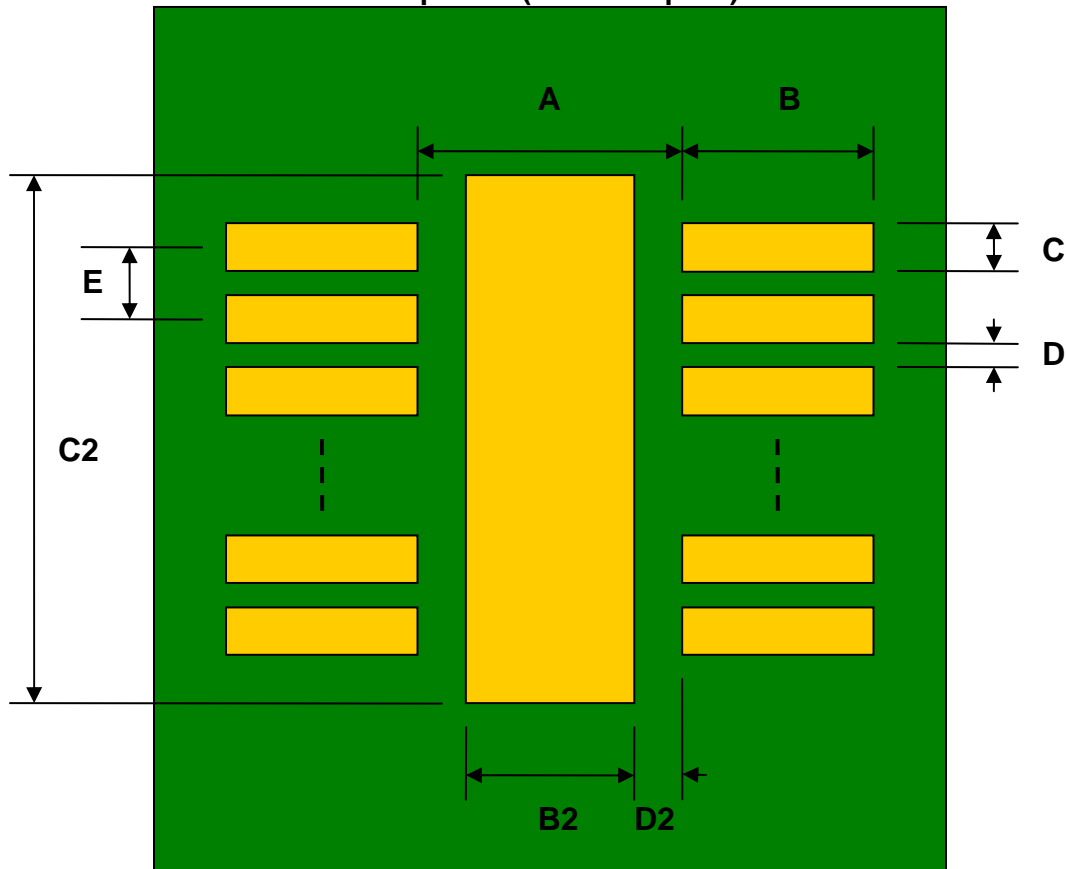

(Representative drawing only - not to scale)

### Bottom View (DIP Pins)



(Representative drawing only - not to scale)

### Side View (DIP Pins)



(Representative drawing only - not to scale)