



System Board 5996

MPOS-STD2: TURNKEY PCI-PTS MOBILE POS (MPOS) TERMINAL

 All versions are No Longer Available.




Introduction

MPOS-STD2 is a complete Mobile POS reference platform that embeds a color TFT display, keypad, mag stripe reader, smartcard reader, Bluetooth®, contactless interface, and LiPo rechargeable battery. The device is a complete MPOS-in-a-box solution that has been pre-evaluated by security labs for compliance with PCI-PTS 4.0 standards. It is a full turnkey solution that comes with an extensive hardware and software bundle that includes all the pieces required to successfully modify, adapt, build, program, certify, and manufacture a Mobile POS terminal and thus, in large quantities.

The MPOS-STD2 reference design is based on the MAX32550 Secure Flash-based Cortex® M3 microcontroller that embeds most of the peripherals and analog interfaces required to operate a Mobile POS with a limited number of external components.

A block diagram of the system is shown in **Figure 1**.

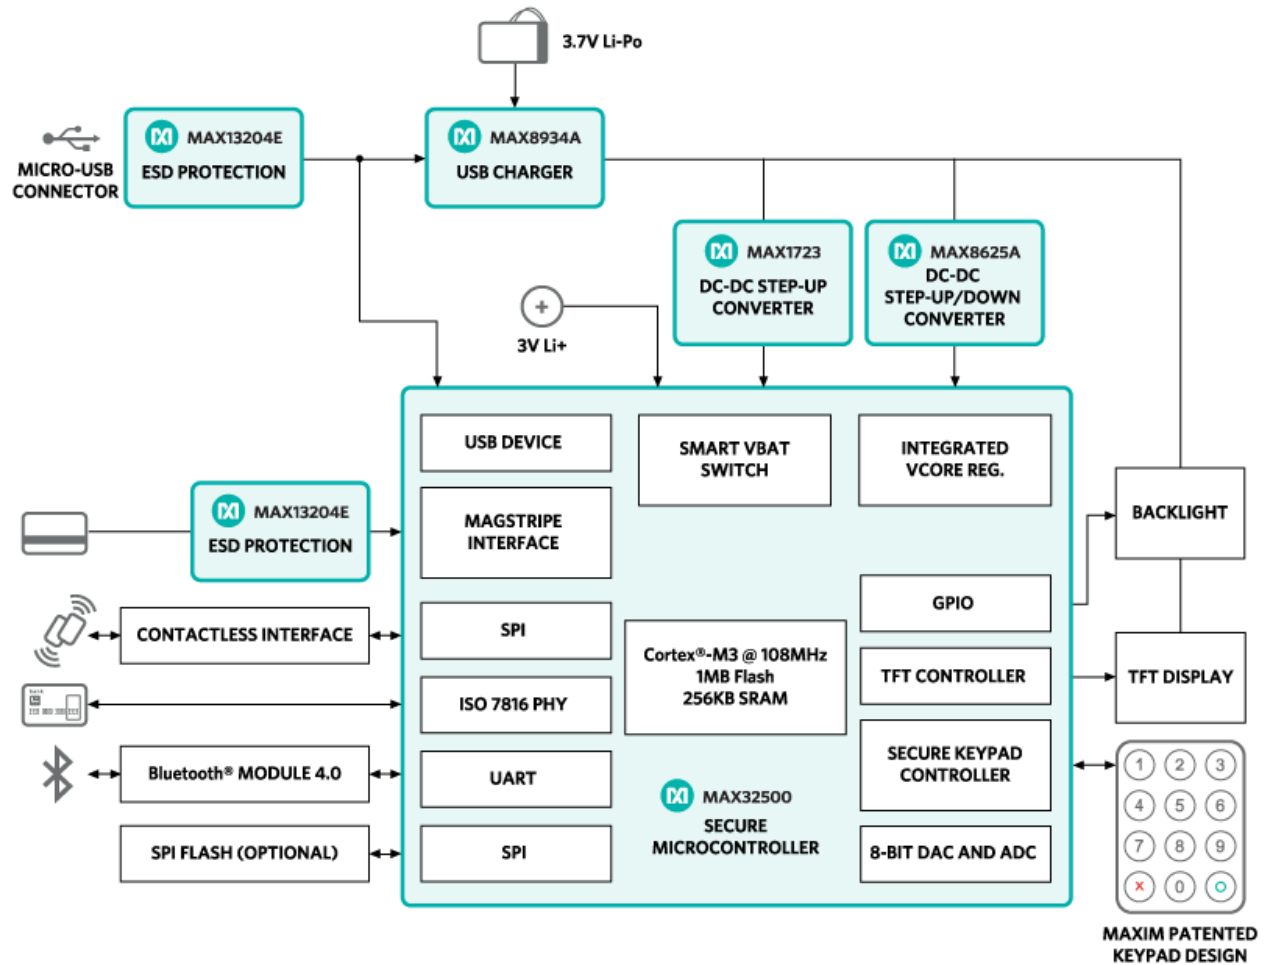

Features

- 320 x 320 graphical color TFT display
- 12-key patented secure keypad
- 2-track magnetic card reader
- EMV-L1 smartcard reader
- Contactless reader
- USB full-speed device port
- Bluetooth® 4.0 controller
- Secure Flash-based Cortex M3 microcontroller
- Rechargeable lithium polymer battery
- Lithium backup battery
- -10°C to +40°C operating range
- -40°C to +85°C storage range
- Support and certification assistance

Applications

- MPOS
- Pin pads

Benefits

- Quick time to market
- Reduced R&D expense
- Accelerated certification
- Secure supply chain
 - Description of what each option of the reference design contains.
 - **MPOS-STD2-REF#**: MPOS Standard II Reference Design that contains all the design files, software and reports. Does not include physical hardware.
 - **MPOS-STD2-PRO#**: MPOS Standard II Prototype that is a working prototype with casing of the full MPOS. Does not include design files, software and reports.
 - **MPOS-STD2-KIT#**: MPOS Standard II Evaluation Kit is an development kit based upon the MPOS-STD2 reference design. Does not include design files, software and reports.

Detailed Description of the Reference Design

Features

- MAX32550 Secure Microcontroller:
 - 108MHz 32-bit ARM® Cortex M3 core with MPU
 - 256KB of SRAM
 - 1MB of Flash
 - 64KB of ROM
 - 4KB of OTP
 - 8KB of encryptable NVSRAM
- External memory (optional):
 - 1MB external SPI flash (optional)
- User Interface:
 - 320 x 240 dots graphic color TFT with backlight
 - 12-key patented secure keypad
- Magnetic Card Reader:
 - 2-tracks magnetic card reader
- Smartcard Reader:
 - EMV Level 1 4.2, ISO7816, 3V/1.8V/5V support, T=0 and T=1 protocols
- Contactless Reader:
 - NXP CLRC633 interface
- Connectivity:
 - USB device from MAX32550
 - Bluetooth 4.0, PAN1026 complete certified module
- Environmental
 - Operating temperature range from -10°C to +40°C

- Storage temperature range from -40°C to +85°C
- Dimensions
 - 121mm x 75mm x 17.25mm (L x W x H)
- Power
 - 3.7V/230mAh Lithium Polymer rechargeable through USB
 - 125mAh MNO2 battery backup
 - MAX8934 USB charger
 - MAX8625 step-up/down converter
 - MAX1723 step-up DC-DC converter for 5V smart cards
- ESD protection
 - 2 x MAX13204 ESD protections on USB and magnetic head

- **Deliverables**

	Description
Software	Development environment
	Full BSP package
	Cryptographic library
	Demo application
Documentation	Schematic and hardware
	PCI-PTS 4.0 evaluation report
	Development environment user guide
	Evaluation kit user guide
Support	Technical support
	Certification assistance
Schematic & PCB	Schematics
	Layout

	PCB manufacturing
	Pick and place
	Netlist
	BOM
Mechanical design	2D design files
	3D design files
Hardware	MPOS-STD2 prototype unit
	MPOS-STD2 evaluation kit

Description of what each option of the reference design contains.

MPOS-STD2-REF#: MPOS Standard II Reference Design that contains all the design files, software and reports. Does not include physical hardware.

MPOS-STD2-PRO#: MPOS Standard II Prototype that is a working prototype with casing of the full MPOS. Does not include design files, software and reports.

MPOS-STD2-KIT#: MPOS Standard II Evaluation Kit is an development kit based upon the MPOS-STD2 reference design. Does not include design files, software and reports.

ARM is a registered trademark of ARM Limited.
Bluetooth is a registered trademark of Bluetooth SIG, Inc.
Cortex is a registered trademark of ARM Limited.