


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	ECR-14-011637	18AUG2014	HZ	RZ

1. MAXIMUM INSERTION LOSS: 0.20dB
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702

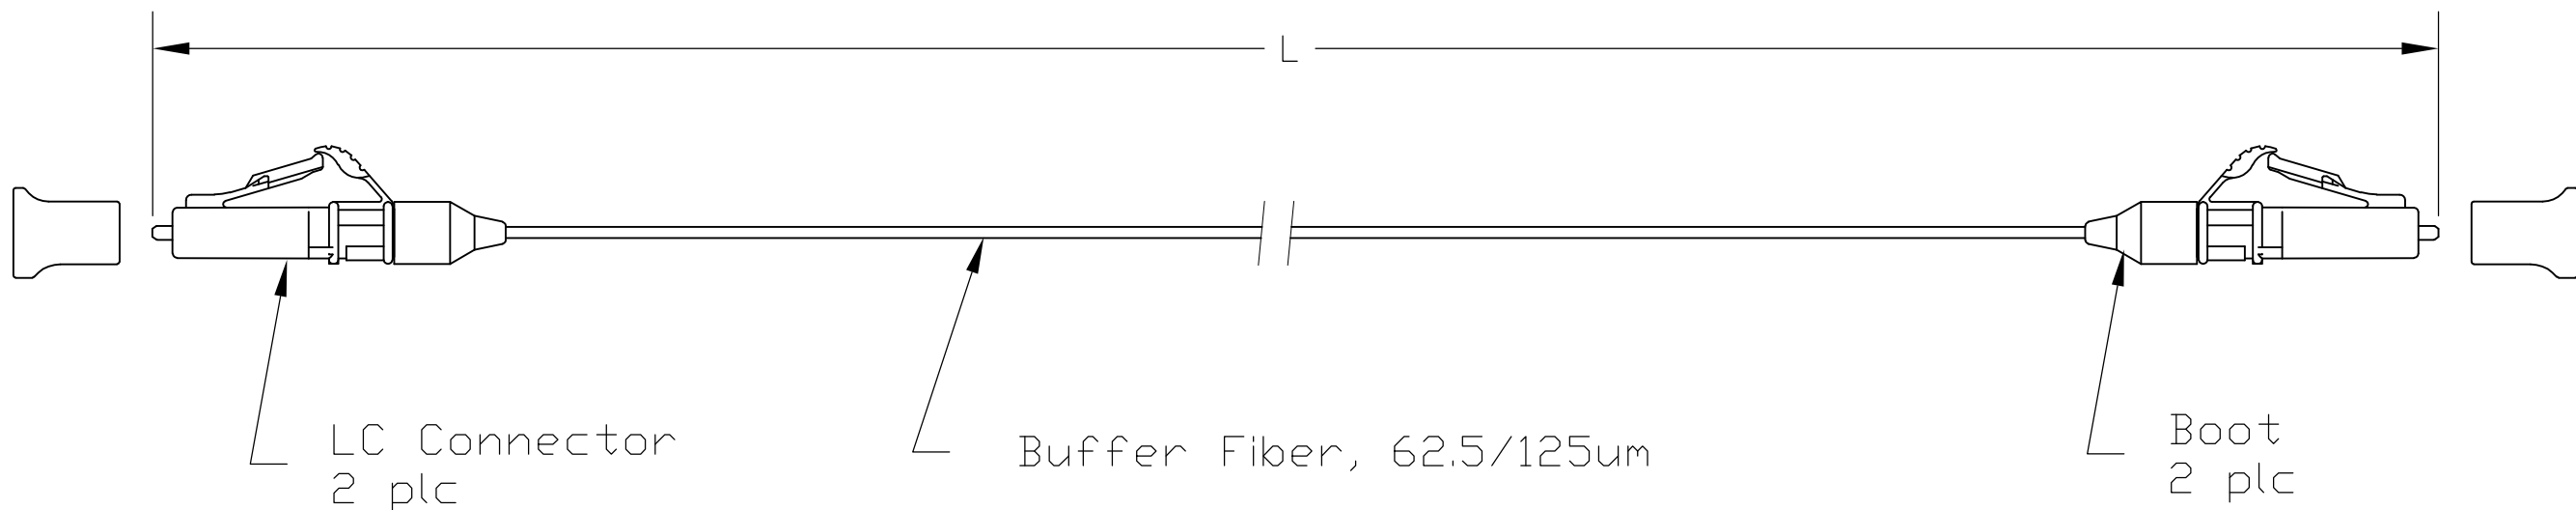

10.00±.15 [393.70±6.00]	1-6374108-0
2.15±.05 [84.65±2.00]	6374108-6
5.00±0.08 [196.90±3.00]	6374108-5
4.00±0.08 [157.50±3.00]	6374108-4
3.00±0.05 [118.10±2.00]	6374108-3
2.00±0.05 [78.70±2.00]	6374108-2
1.00±0.05 [39.40±2.00]	6374108-1
LENGTH (L)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.S.VASU	31 AUG 05	TE Connectivity		
DIMENSIONS: METERS [INCHES]		CHK	J.DUNCAN	31 AUG 05			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD	J.DUNCAN	31 AUG 05	NAME		
		PRODUCT SPEC		Cable Assy, Fiber Optic, 900 Buffer 62.5/125um LC TO LC, Optimate			
MATERIAL		APPLICATION SPEC		SIZE			RESTRICTED TO
FINISH		WEIGHT		A3 00779		DRAWING NO	C-6374108
		CUSTOMER DRAWING		SCALE		SHEET	REV
				NTS		1 OF 1	C