


Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

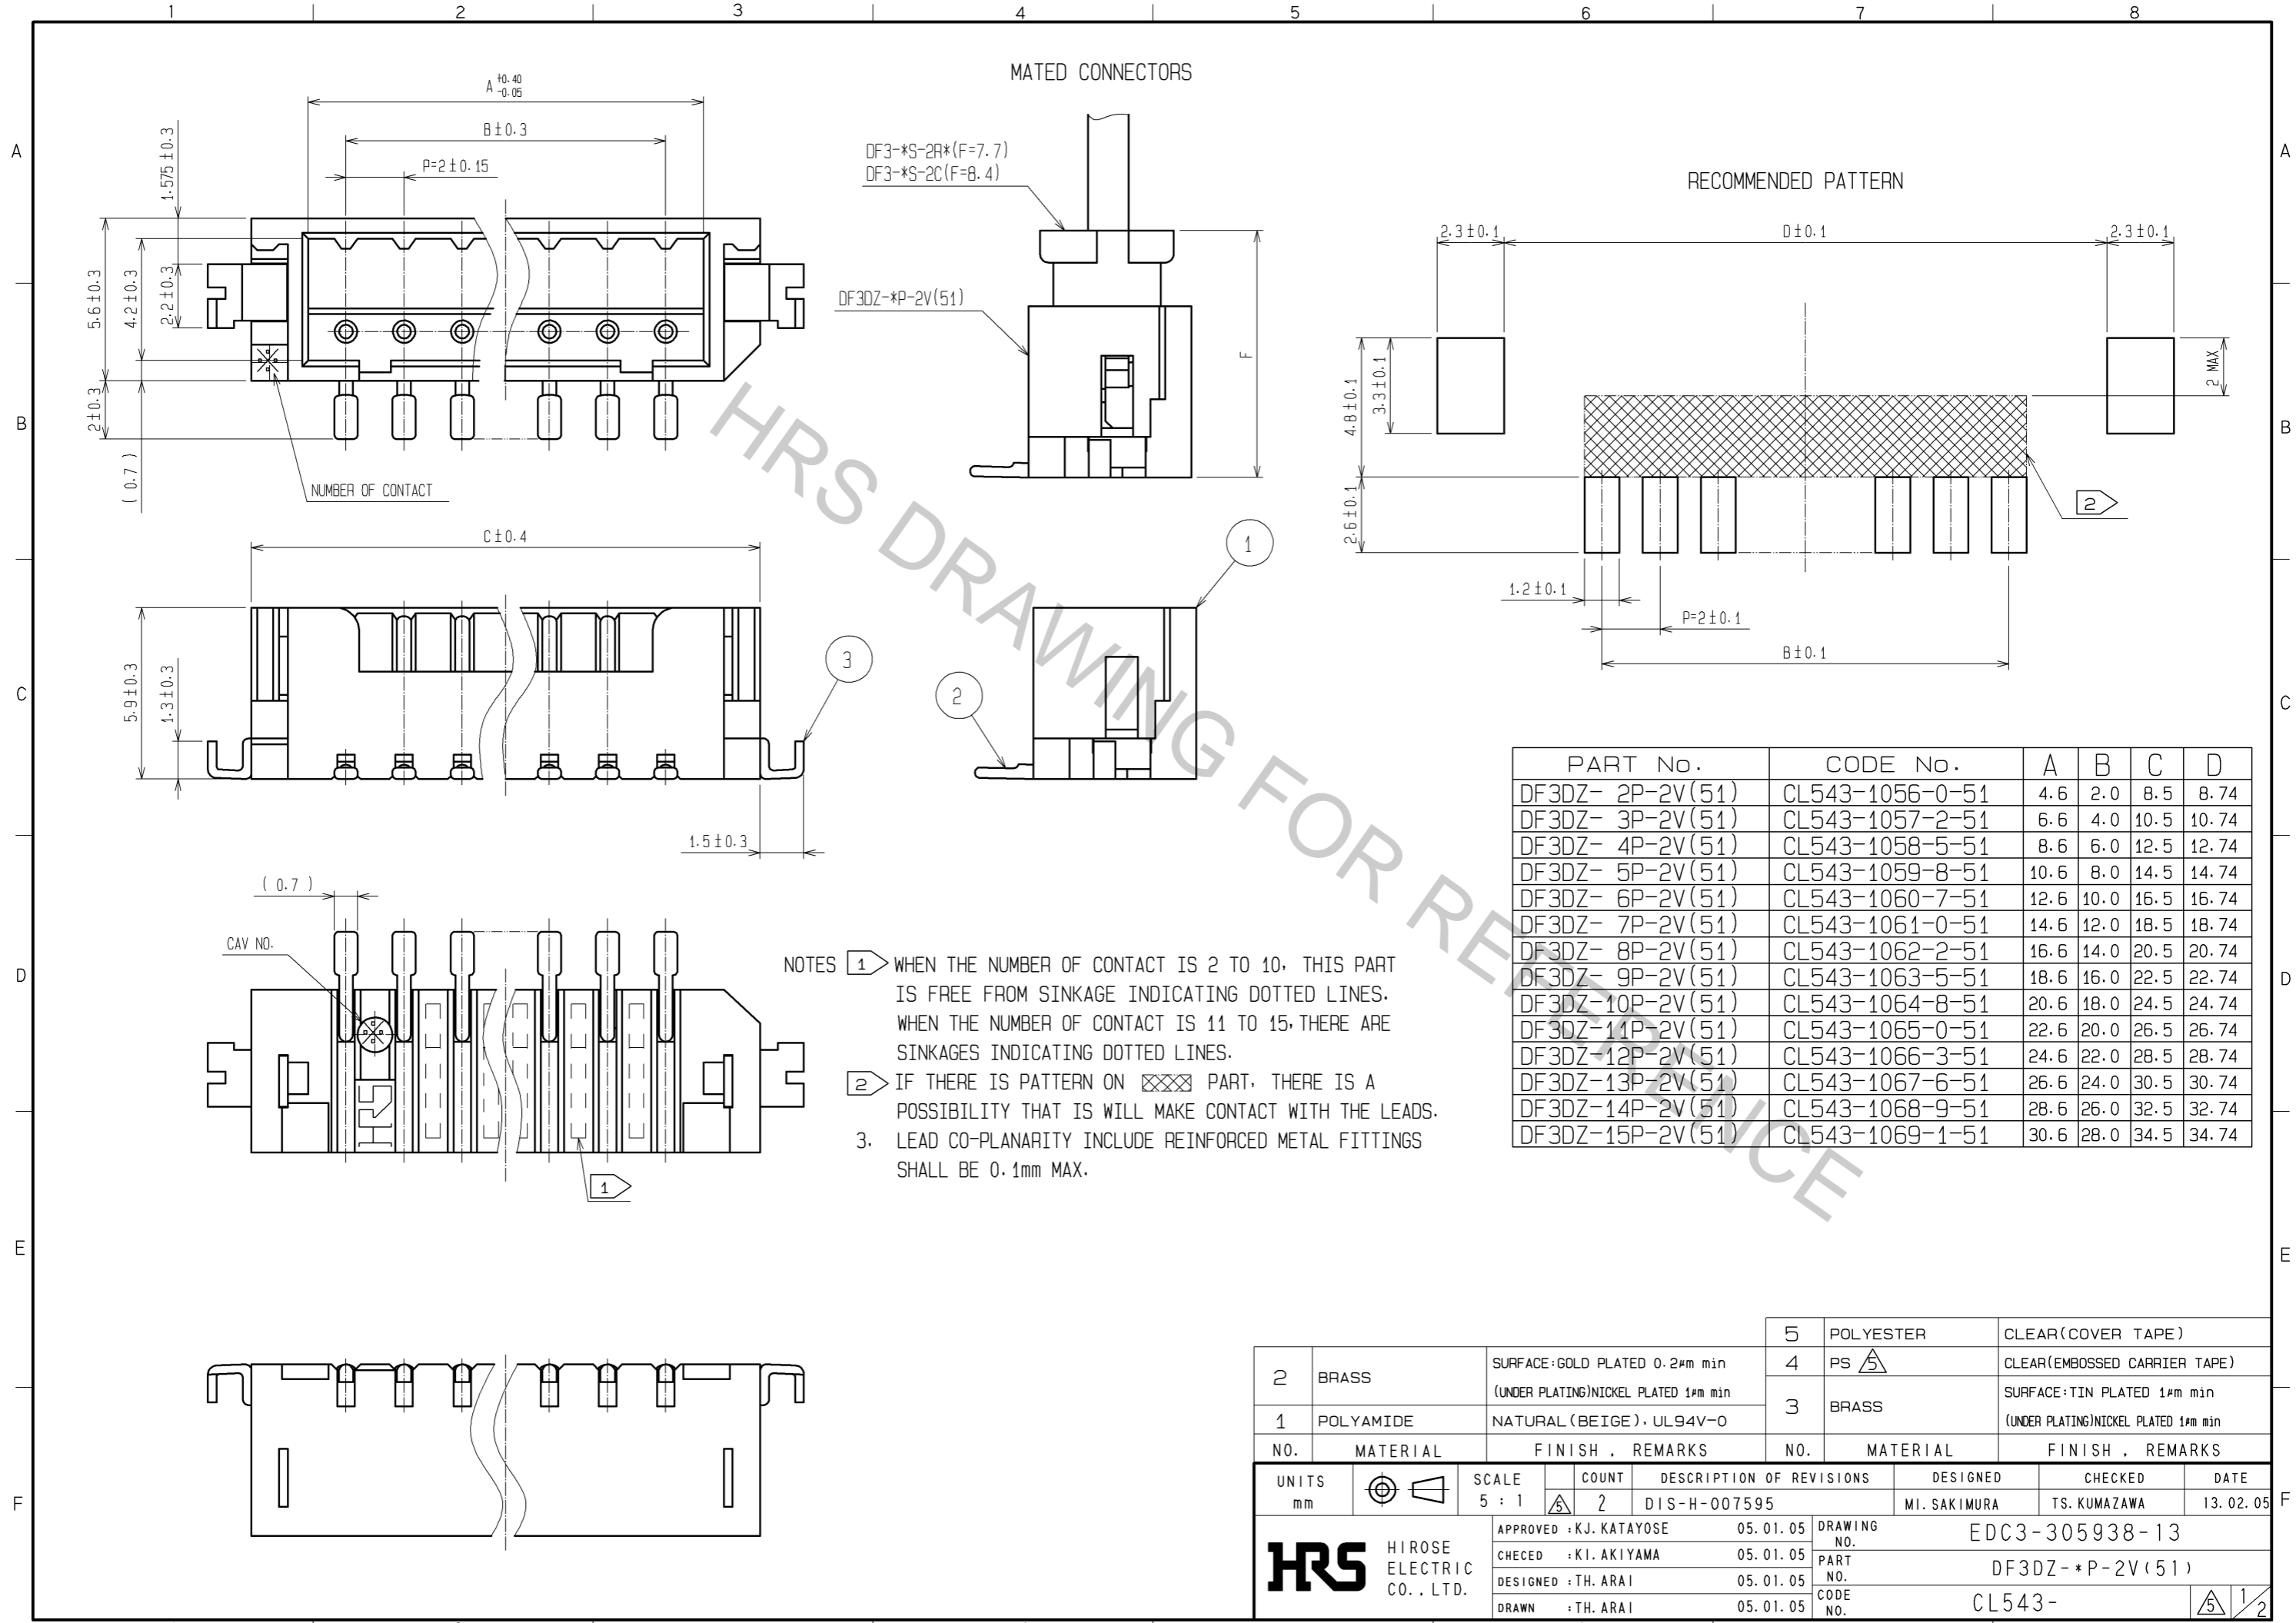


PART No.	CODE No.	A	B	C	D
DF3DZ- 2P-2V(51)	CL543-1056-0-51	4.6	2.0	8.5	8.74
DF3DZ- 3P-2V(51)	CL543-1057-2-51	6.6	4.0	10.5	10.74
DF3DZ- 4P-2V(51)	CL543-1058-5-51	8.6	6.0	12.5	12.74
DF3DZ- 5P-2V(51)	CL543-1059-8-51	10.6	8.0	14.5	14.74
DF3DZ- 6P-2V(51)	CL543-1060-7-51	12.6	10.0	16.5	16.74
DF3DZ- 7P-2V(51)	CL543-1061-0-51	14.6	12.0	18.5	18.74
DF3DZ- 8P-2V(51)	CL543-1062-2-51	16.6	14.0	20.5	20.74
DF3DZ- 9P-2V(51)	CL543-1063-5-51	18.6	16.0	22.5	22.74
DF3DZ- 10P-2V(51)	CL543-1064-8-51	20.6	18.0	24.5	24.74
DF3DZ- 11P-2V(51)	CL543-1065-0-51	22.6	20.0	26.5	26.74
DF3DZ- 12P-2V(51)	CL543-1066-3-51	24.6	22.0	28.5	28.74
DF3DZ- 13P-2V(51)	CL543-1067-6-51	26.6	24.0	30.5	30.74
DF3DZ- 14P-2V(51)	CL543-1068-9-51	28.6	26.0	32.5	32.74
DF3DZ- 15P-2V(51)	CL543-1069-1-51	30.6	28.0	34.5	34.74

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
2	BRASS		SURFACE:GOLD PLATED 0.2μm min (UNDER PLATING)NICKEL PLATED 1μm min	5	POLYESTER		CLEAR(COVER TAPE)
1	POLYAMIDE		NATURAL (BEIGE)・UL94V-0	4	PS		CLEAR(EMBOSSED CARRIER TAPE)
				3	BRASS		SURFACE:TIN PLATED 1μm min (UNDER PLATING)NICKEL PLATED 1μm min

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	2	DIS-H-007595	MI. SAKIMURA	TS. KUMAZAWA	13.02.05

APPROVED	DATE	DRAWING NO.
KJ. KATAYOSE	05.01.05	EDC3-305938-13
CHECED	DATE	PART NO.
KI. AKIYAMA	05.01.05	DF3DZ- *P-2V(51)
DESIGNED	DATE	CODE NO.
TH. ARAI	05.01.05	CL543-
DRAWN	DATE	
TH. ARAI	05.01.05	

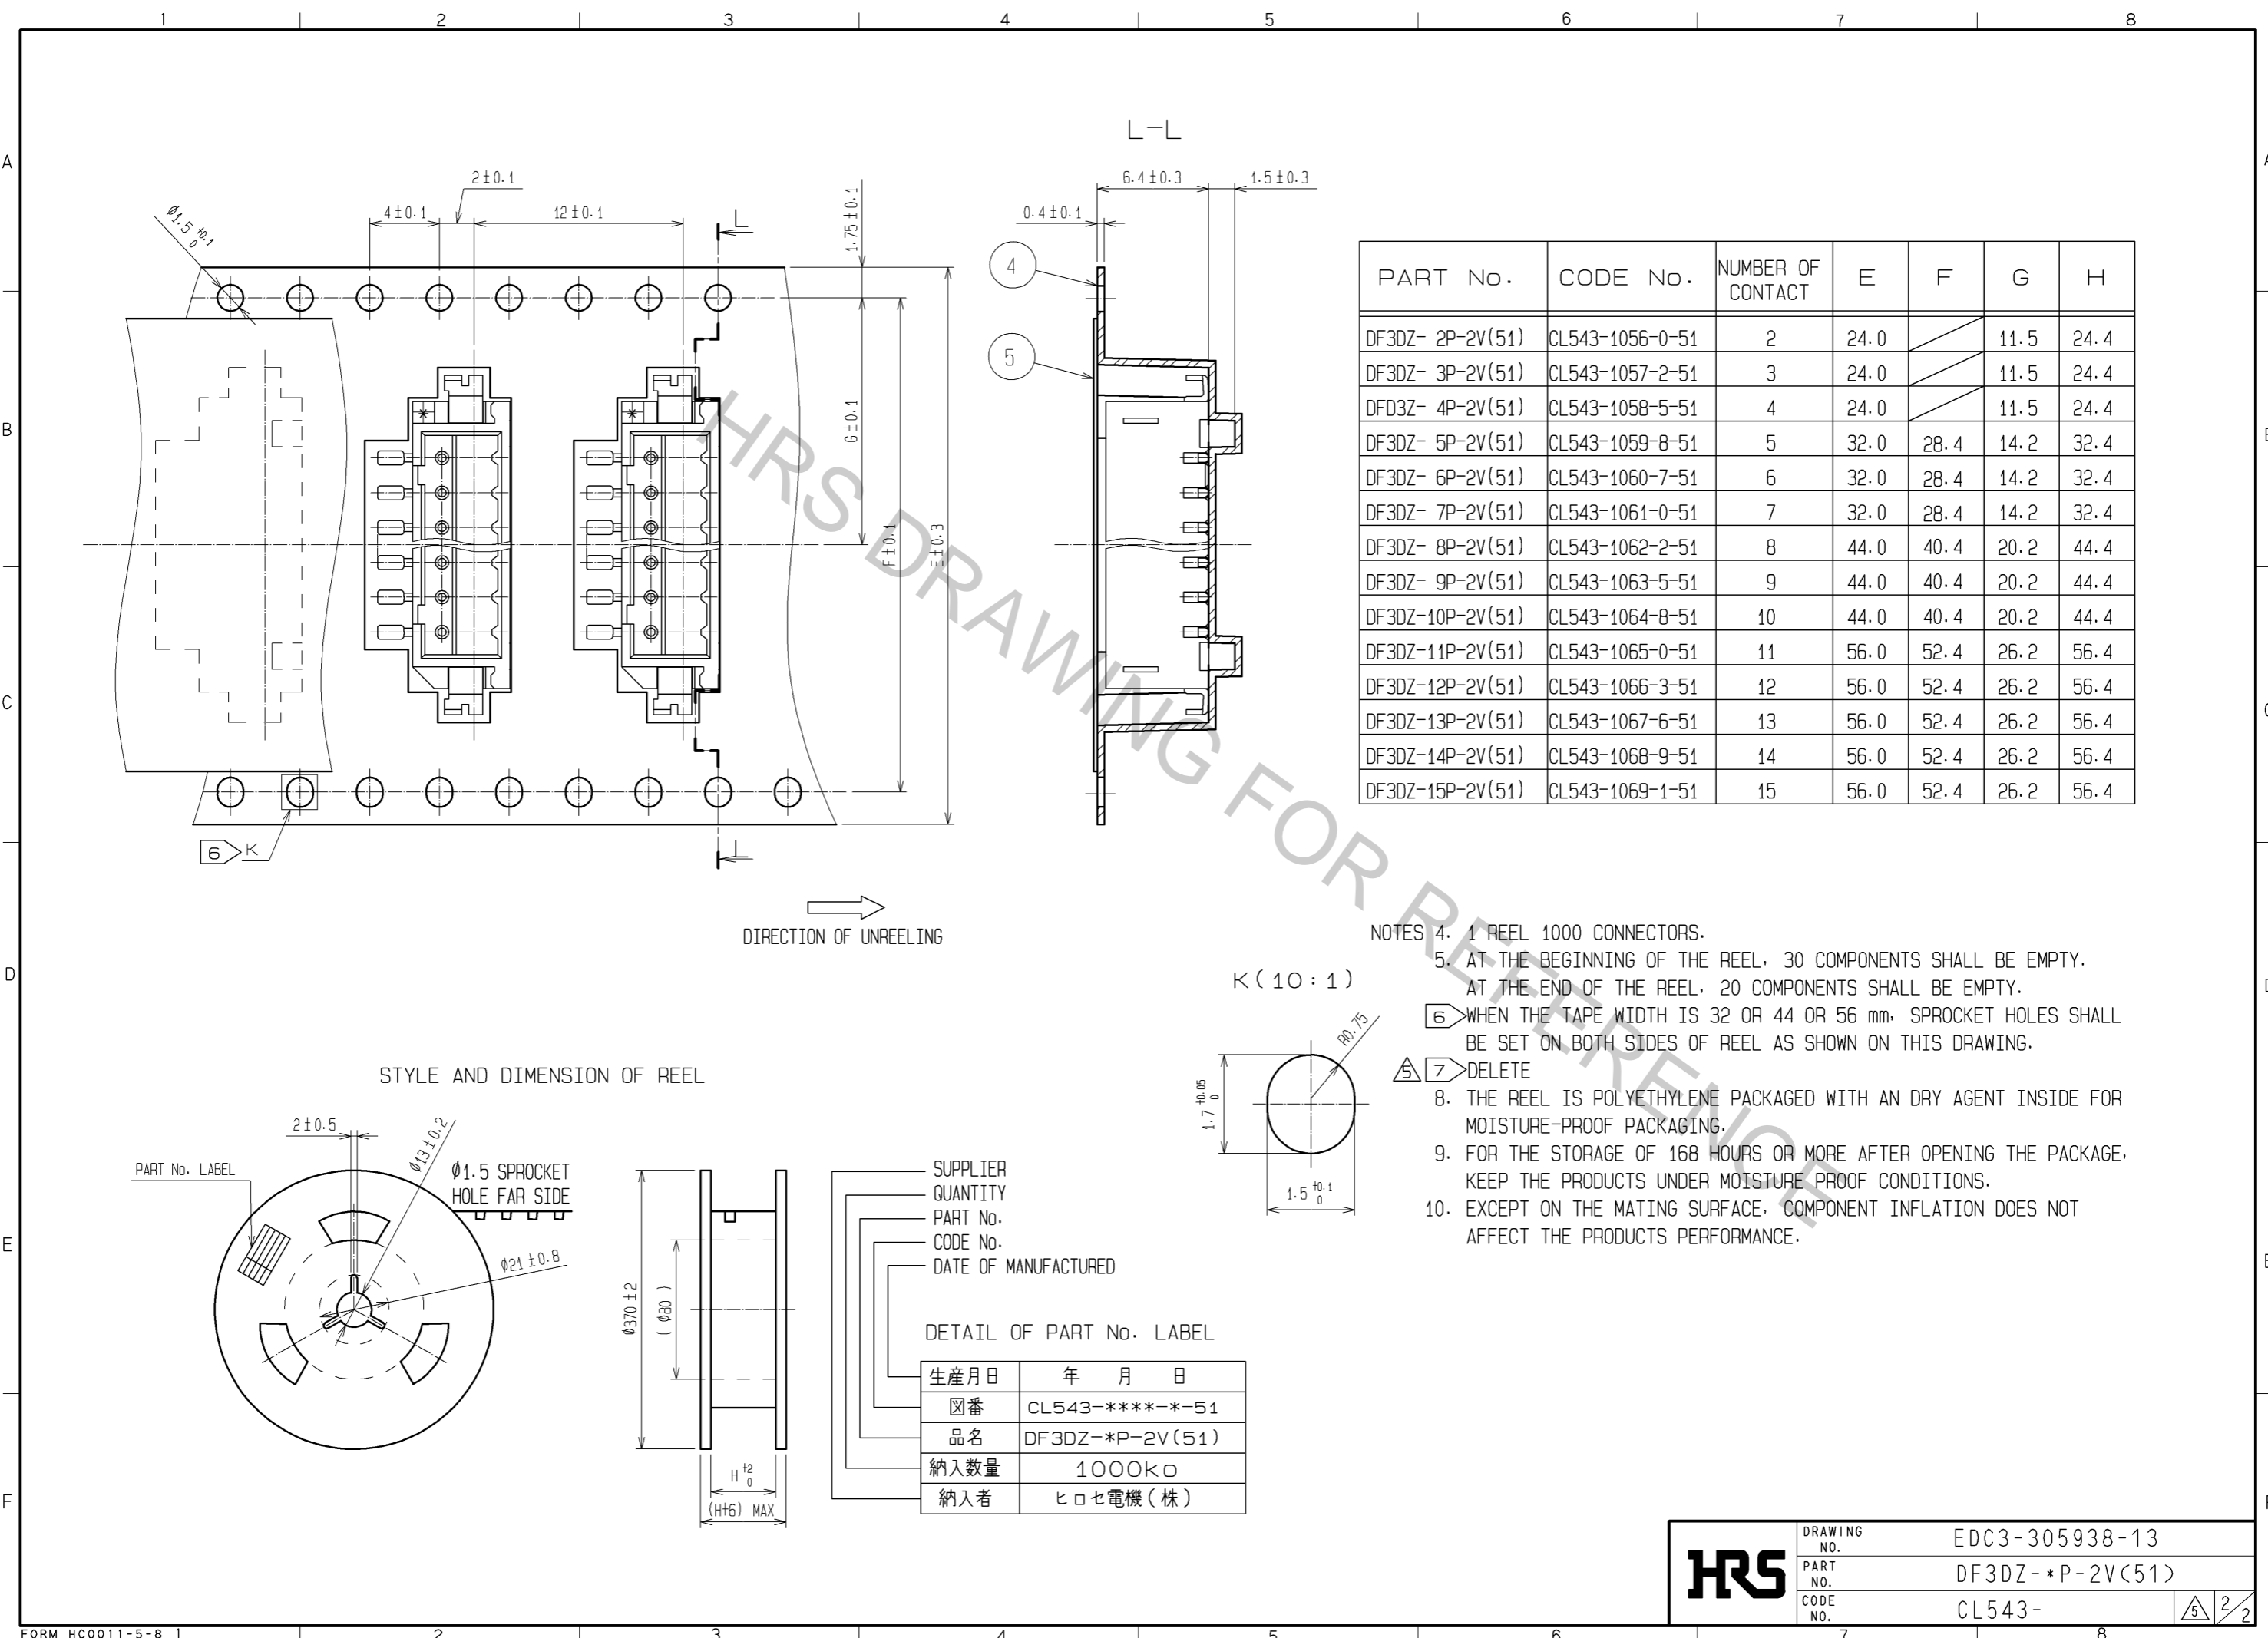

PART No.	CODE No.	NUMBER OF CONTACT	E	F	G	H
DF3DZ- 2P-2V(51)	CL543-1056-0-51	2	24.0		11.5	24.4
DF3DZ- 3P-2V(51)	CL543-1057-2-51	3	24.0		11.5	24.4
DFD3Z- 4P-2V(51)	CL543-1058-5-51	4	24.0		11.5	24.4
DF3DZ- 5P-2V(51)	CL543-1059-8-51	5	32.0	28.4	14.2	32.4
DF3DZ- 6P-2V(51)	CL543-1060-7-51	6	32.0	28.4	14.2	32.4
DF3DZ- 7P-2V(51)	CL543-1061-0-51	7	32.0	28.4	14.2	32.4
DF3DZ- 8P-2V(51)	CL543-1062-2-51	8	44.0	40.4	20.2	44.4
DF3DZ- 9P-2V(51)	CL543-1063-5-51	9	44.0	40.4	20.2	44.4
DF3DZ-10P-2V(51)	CL543-1064-8-51	10	44.0	40.4	20.2	44.4
DF3DZ-11P-2V(51)	CL543-1065-0-51	11	56.0	52.4	26.2	56.4
DF3DZ-12P-2V(51)	CL543-1066-3-51	12	56.0	52.4	26.2	56.4
DF3DZ-13P-2V(51)	CL543-1067-6-51	13	56.0	52.4	26.2	56.4
DF3DZ-14P-2V(51)	CL543-1068-9-51	14	56.0	52.4	26.2	56.4
DF3DZ-15P-2V(51)	CL543-1069-1-51	15	56.0	52.4	26.2	56.4

- NOTES
- 1 REEL 1000 CONNECTORS.
 - AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
 - WHEN THE TAPE WIDTH IS 32 OR 44 OR 56 mm, SPROCKET HOLES SHALL BE SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING.
 - DELETE
 - THE REEL IS POLYETHYLENE PACKAGED WITH AN DRY AGENT INSIDE FOR MOISTURE-PROOF PACKAGING.
 - FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE PACKAGE, KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
 - EXCEPT ON THE MATING SURFACE, COMPONENT INFLATION DOES NOT AFFECT THE PRODUCTS PERFORMANCE.

STYLE AND DIMENSION OF REEL

→ DIRECTION OF UNREELING

K (10 : 1)

SUPPLIER
QUANTITY
PART No.
CODE No.
DATE OF MANUFACTURED

DETAIL OF PART No. LABEL

生産月日	年 月 日
☒番	CL543-****-*51
品名	DF3DZ-*P-2V(51)
納入数量	1000K0
納入者	ヒロセ電機(株)

HRS	DRAWING NO.	EDC3-305938-13
	PART NO.	DF3DZ-*P-2V(51)
	CODE NO.	CL543-

2/2