

SUMMARY

Wires

Low	7
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Female solder
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	PAG.M0.7GL.AC52GZ
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PR*: Free receptacle with cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0; Plug: male contact; Receptacle: female contact)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	C52: 4 - 5.2 mm
Variant	G : Gray collet nut for bend relief

Performance

Configuration	1P.M07 : 7 Low Voltage
Insulator	
Rated Current	5 Amps

Specifications

Contact Type:	Solder
Max. Matings:	2000
Contact Dia.:	0.7 mm (0.0275in)
Bucket Dia.:	0.6 mm (0.024in)
Max. Solid Conductor:	0.14 mm ² (AWG 26)
Max. Stranded Conductor:	0.14 mm ² (AWG 26)


R (max): 6.5 mOhm
 Test voltage (kV rms) Contact-contact: 1.05
 Air clearance min. (mm) or Creepage distance min. (mm): 0.85

Others

F ret (min): 50 N
 F ret (max): 150 N
 IP Rating: 50

DRAWINGS

Draws

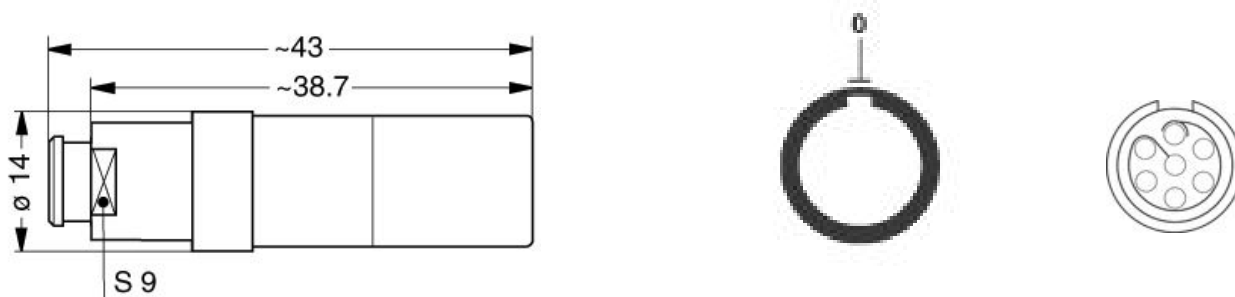

Dimensions

	A	L
mm.	14	43
in.	0,55	1,69

RECOMMENDED BY LEMO


Tools

None

Cables

CMN.07.T28.044PGCE	PVC	GREY	
CMN.07.T28.044PGZE		Grey	
CMN.07.T28.044PNCE	PVC	Black	

*Property of LEMO SA. All rights reserved
 This document is not contractual*

CMN.07.T28.044PNZE			
070 140	PVC	Grey	