


## Specification Sheet

Part Number: 553-50072

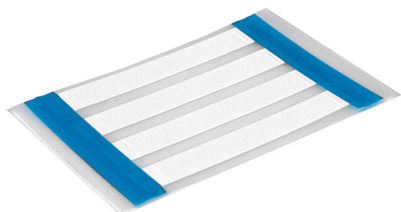

Heat Shrink Labels, Single Side, 2-Slit, .187" (4.74mm), PO-X, White, 3000/box

**Article Number**

553-50072

**Type**

HST4.8-1.6WH-2S

**Color**

White (WH)

**Features & Benefits**

- Slide Slit and optional center slits for easy wire insertion.
- Smooth surface for clean and legible printing.
- Supplied on a ladder style carrier so that markers can be kitted after printing.
- A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

**Quantity Per**

box

**Product Description**

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

<b>Short Description</b>	Heat Shrink Labels, Single Side, 2-Slit, .187" (4.74mm), PO-X, White, 3000/box
<b>Global Part Name</b>	HST4.8-1.6WH-2S-PO-X-WH
<b>Variant</b>	Thin-Wall
<b>Width W (Imperial)</b>	0.633
<b>Width W (Metric)</b>	16.08
<b>Thickness T (Imperial)</b>	.003
<b>Thickness T (Metric)</b>	.0762
<b>Height H (Imperial)</b>	0.312
<b>Height H (Metric)</b>	7.92
<b>Width of Liner (Metric)</b>	76.2
<b>Width of Liner (imperial)</b>	3.0
<b>Outside Diameter OD(Imperial)</b>	0.187
<b>Outside Diameter OD(metric)</b>	4.74
<b>Outside Diameter Max(Imperial)</b>	0.187
<b>Outside Diameter Max (metric)</b>	4.74
<b>Wall Thickness WT (Imperial)</b>	0.026

**Wall Thickness WT (Metric)**

0.66

**Material**

Polyolefin, cross-linked (PO-X)

**Material Shortcut**

PO-X

**US MIL SPEC**

AMS-DTL-23053/5 Class 1 and 3

MIL-STD-202G Method 215K  
SAE-AS81531

**Flammability**

UL 224 VW-1

**Halogen free**

No

**Operating Temperature (Metric)**

-67°F to +275°F (-55°C to +135°C)

**Reach Complaint(Article 33)**

Yes

**ROHS Complaint**

Yes

**Certification/Specification WEB**

CEN

**Package Quantity(Imperial)**

3000

**Package Quantity (Metric)**

3000

**Customs Number**

3926909987

**Content Unit(BMEcat)**

pack

**Labels per Column**

1

**Labels per Row**

3

**Weight (Metric)**

0.635

**Weight (Imperial)**

1.36