

Network cable - VS-IP20-IP20-94B-LI/5,0 - 1407903

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Assembled Ethernet cable, shielded, 4-pair, AWG 26 stranded (7-wire), RAL 5021 (sea blue), RJ45 connector/IP20 to RJ45 connector/IP20, line, length 5 m



Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 260.0 GRM |
| Custom tariff number | 85444210 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

Ambient conditions

| | |
|----------------------|------|
| Degree of protection | IP20 |
|----------------------|------|

General data

| | |
|----------------------|--------------------------------|
| Number of positions | 8 |
| Signal type/category | Ethernet CAT5 (IEC 11801:2002) |
| | Ethernet CAT5e (TIA 568B:2001) |
| Pollution degree | 2 |

Characteristics head 1

| | |
|--|---------------------------|
| Head type | Plug Straight RJ45 / IP20 |
| No. of positions (pin connector pattern) | 8 |

Characteristics head 2

| | |
|--|---------------------------|
| Head type | Plug Straight RJ45 / IP20 |
| No. of positions (pin connector pattern) | 8 |

Network cable - VS-IP20-IP20-94B-LI/5,0 - 1407903

Technical data

Cable

| | |
|---|--|
| Cable type | Ethernet |
| Cable type (abbreviation) | 94F |
| Signal type/category | Ethernet CAT6 _A |
| Cable structure | 4x2xAWG26/7; S/FTP |
| Conductor cross section | 4x 2x 0.14 mm ² |
| AWG signal line | 26 |
| Conductor structure signal line | 7x 0.16 mm |
| Core diameter including insulation | 1.04 mm |
| Thickness, insulation | 0.28 mm (signal line) |
| | 0.65 mm (Outer cable sheath) |
| Wire colors | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Aluminum-lined polyester foil |
| Overall twist | 4 pairs |
| Shielding | Tinned copper braided shield |
| Optical shield covering | 70 % |
| External sheath, color | water blue RAL 5021 |
| External cable diameter D | 6.4 mm ±0.2 mm |
| Smallest bending radius, fixed installation | 25.6 mm |
| Smallest bending radius, movable installation | 51.2 mm |
| Tensile strength short-term/long-term | ≤ 100 N |
| Cable weight | 43 kg/km |
| Outer sheath, material | PUR |
| Material conductor insulation | PE |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 500 MΩ*km (at 20 °C) |
| Conductor resistance | ≤ 290000000 Ω/km (at 20 °C) |
| Wave impedance | 100 Ω ±5 Ω (at 100 MHz) |
| Signal runtime | 5.3 ns/m |
| Shield attenuation | ≥ 80 dB (at 30 ... 100 MHz) |
| Nominal voltage, cable | ≤ 100 V (at 20 °C) |
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700 V (50 Hz, 1 min.) |
| Flame resistance | IEC 60332-1-2 |
| Halogen-free | According to IEC 60754-1 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |

Network cable - VS-IP20-IP20-94B-LI/5,0 - 1407903

Technical data

Cable

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -40 °C ... 70 °C (cable, fixed installation) |
| | -10 °C ... 50 °C (cable, flexible installation) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC002599 |
| ETIM 5.0 | EC000830 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 26121616 |
| UNSPSC 7.0901 | 26121616 |
| UNSPSC 11 | 26121604 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 26121616 |


Drawings

Cable cross section



Ethernet [94F]

Circuit diagram

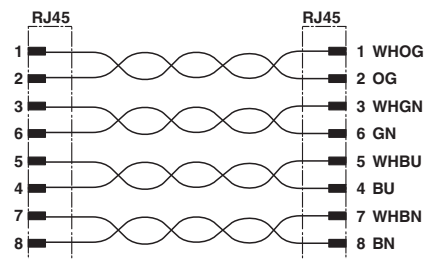

Network cable - VS-IP20-IP20-94B-LI/5,0 - 1407903

Dimensioned drawing

