


PART NUMBER	"A"	"B"	"C"	"D"	LEAD "A" COLOR	LEAD "B" COLOR
FHAC0002ZXJ	89.5±5 (3.524)	89.5±5 (3.524)	6.35±2 (0.25)	6.35±2 (0.25)	ORANGE	ORANGE
FHAC0002ZXJA	243.5±5 (9.587)	243.5±5 (9.587)	N/A	N/A	RED	RED

LTR	DATE	REVISION	CHK	APD
A	06/20/07	63273-RELEASED	DHM	
B	11/21/07	000218ER-RELEASE FHAC0002ZXJA	DHM	

NOTES

- HOLDER MATERIAL: BLACK TPV 251 80W232
- CONTACTS: C194 COPPER ALLOY ANNEALED TIN-PLATED
- WIRE: 12 AWG STRANDED COPPER, 125°C RATED, GXL WIRE
- CRIMP: MUST MEET USCAR 21 STANDARD
- MAX. RATING: 30A, 32Vdc
- MAX. TEMPERATURE 105°C
- FUSEHOLDER SHOULD NOT BE PLACED UNDER TENSION IN FINAL APPLICATION

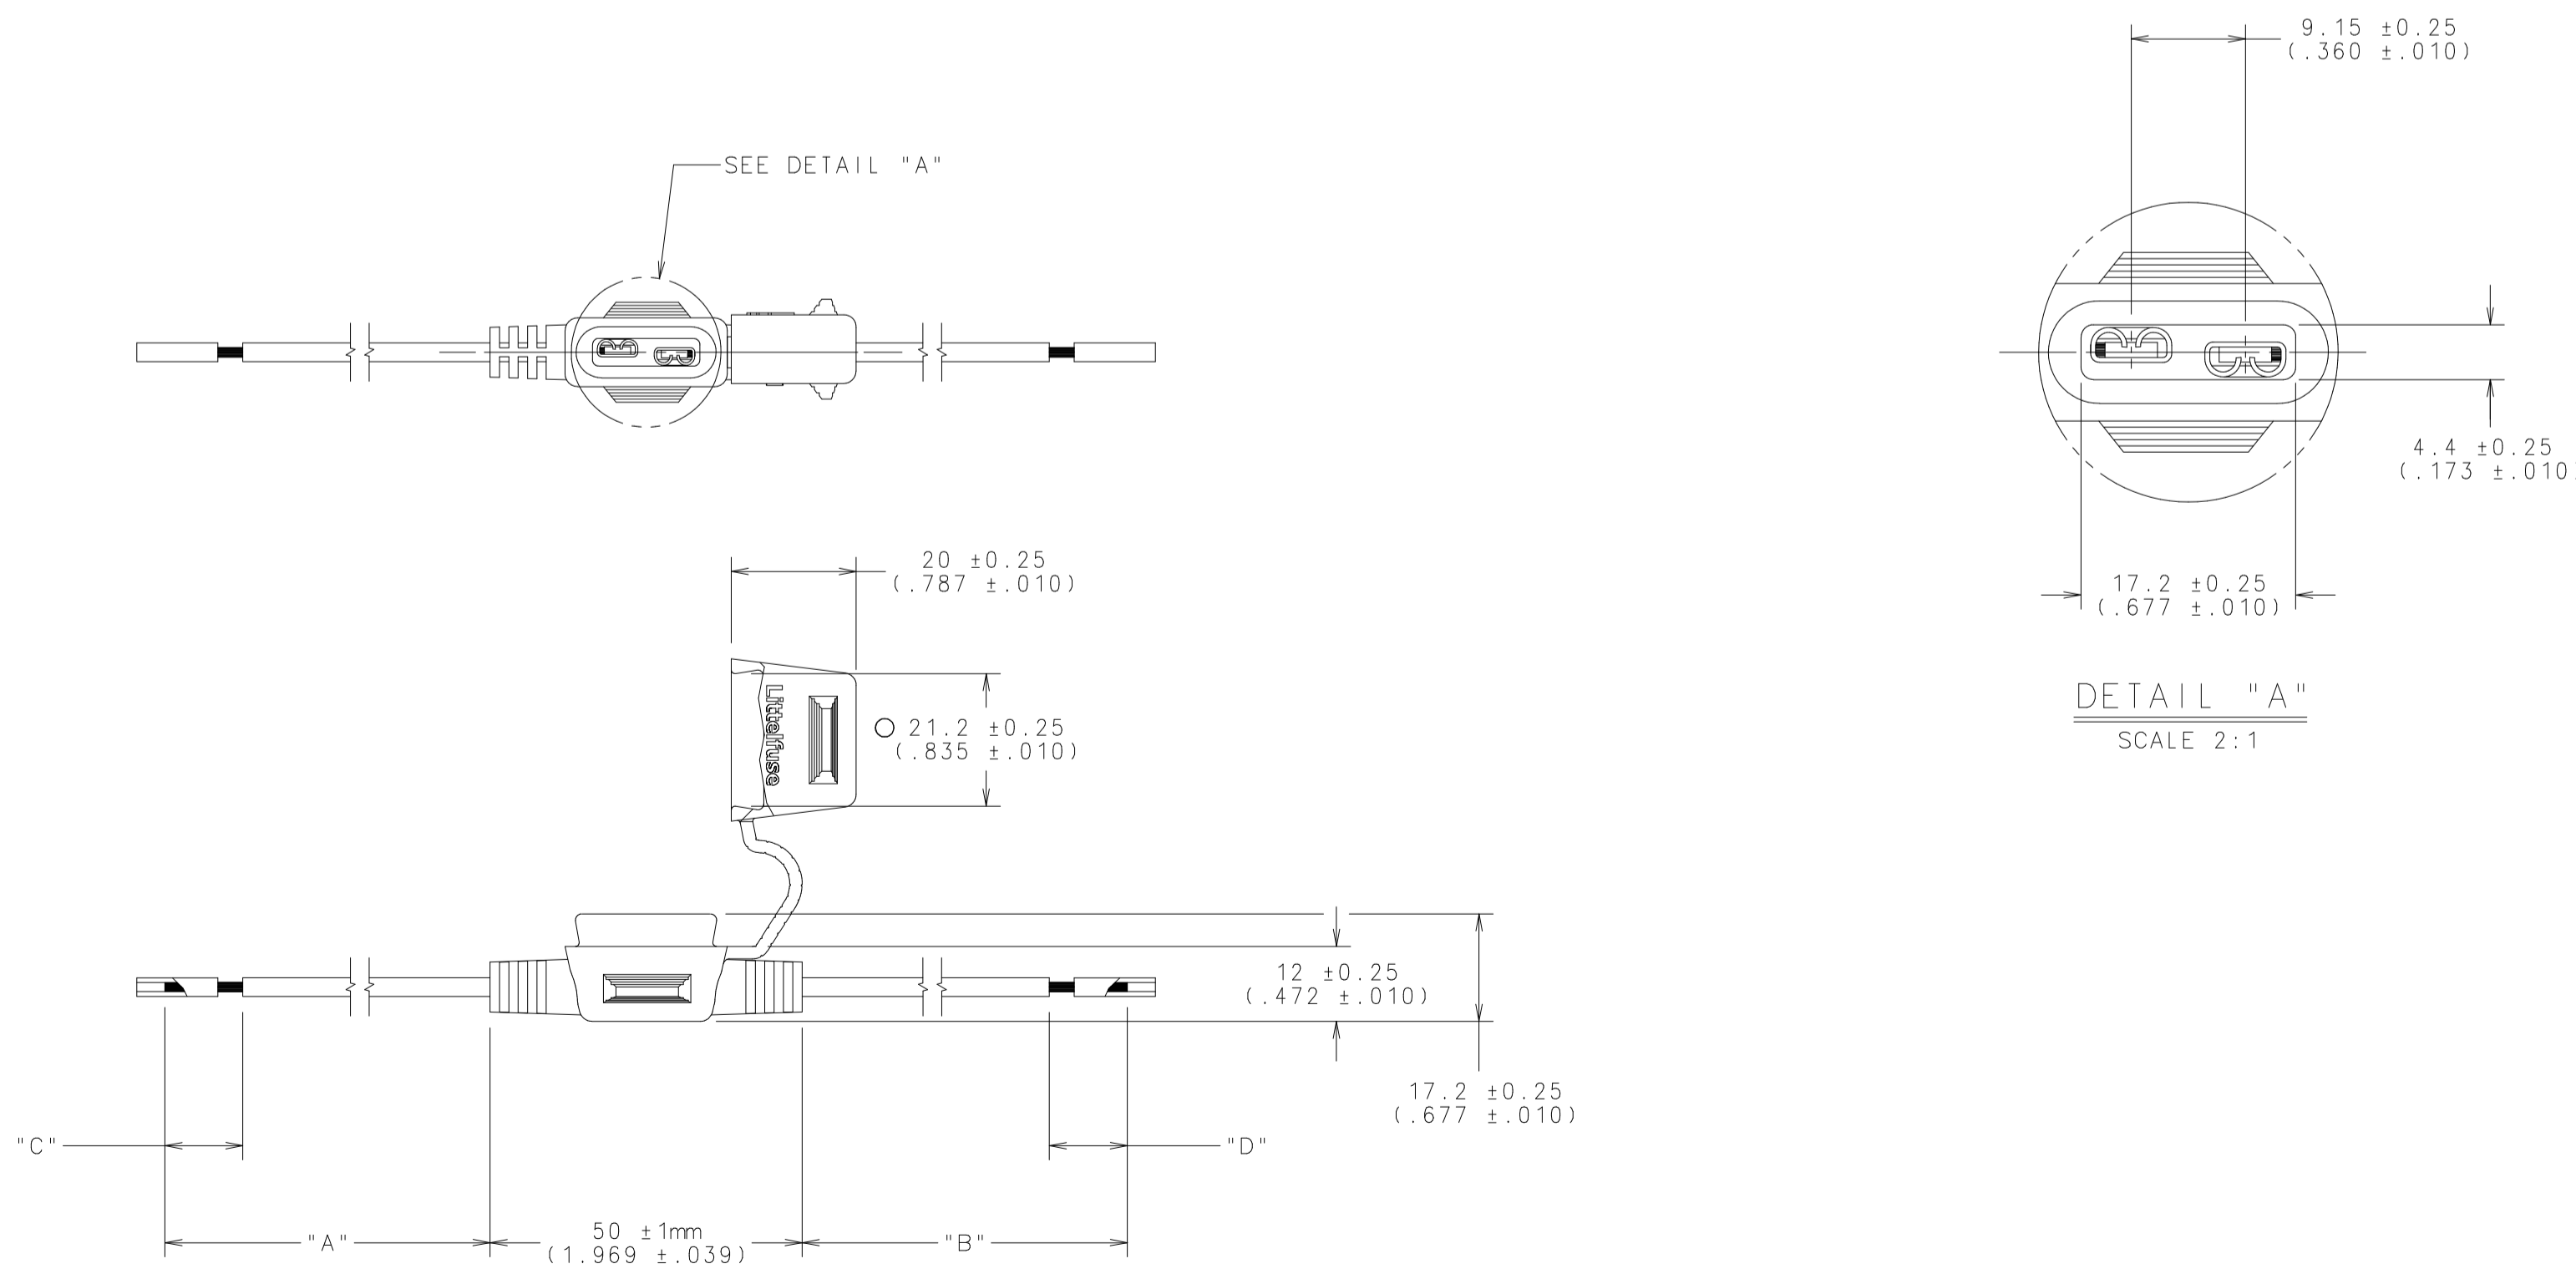

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES.				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
O	DENOTES OPTICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS - MINIMUM CPK VALUE			
S+	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND BRACKETING TO BE DEFINED IN THE FUSE INSPECTION INSTRUCTIONS			
CP	DENOTES CP DIMENSIONS - MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.			
SEE NOTES				
COPIES	10	DRW SPEC		
9	18	FINISH		
10	19			
11	20			
12	21	DRW	DHM	DATE 06/20/07 SCALE FULL UNLESS NOTED
13	22	CHK	DATE	SUPER DR
14	23	APPD	DATE	FINISH GOOD WT
15	33			GRAMS/PIECE
16	43			
17	53			
TOLERANCE UNLESS OTHERWISE SPECIFIED				
TWO PLACE DEC		±.25(.01)		FRACTION ±
THREE PLACE DEC		±.100(.004)		ANGULAR ±1°
PROJECTION				
TITLE ATO IN-LINE FUSEHOLDER				
DES PLAINES, ILLINOIS 60016		REVISION	DRWG. NO.	OUTLINE SERIES
		B	FHAC0002ZXJ	

UNCONTROLLED DOCUMENT

NO PENCIL CHANGES ALLOWED