CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

OUTLINE REF.	MOUNTING** TYPE	DIMENSIONS IN INCHES (mm in parentheses)						
		A	B	C	D	E	F	G
LA50P900 TO 1200	4, 4TI*	6.97 (177)	3.00 (76.2)	3.22 (81.8)	4.97 (126)	0.63 (16.0)	2.38 (60.5)	0.44 (11.1)

*OPTIONAL TRIGGER INDICATOR (TI)

**MOUNTING TYPE: 4 - BOLT-IN BLADES

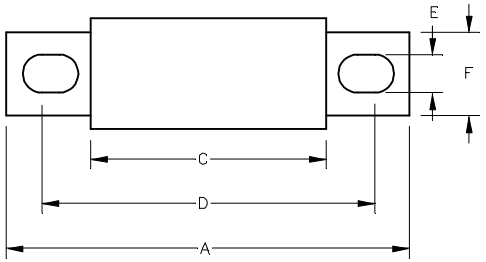



RATINGS

AC: 900-1200A 500VAC, 100kA I.R.

DC: 900-1000A 450VDC, 79kA I.R.
L/R = 10 ms

CATALOG NUMBER	FUSE AMPERE RATING	INDICATOR*	UPC CODE
LA50P9004	900	NO	079458 15145
LA50P10004	1000	NO	079458 15146
LA50P10004TI	1000	YES	079458 15148
LA50P12004	1200	NO	079458 15147
LA50P12004TI	1200	YES	079458 15149

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

● DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS.-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC

FINISH

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

DRW	MRD	DATE 02/21/03
CHK	TN	DATE 02/26/03
APPD	ND	DATE 02/27/03

SCALE 1:2

SUPER DRW

RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE

LA50P 900 THRU 1200A

Littelfuse
DES PLAINES, ILLINOIS 60016

REVISION A

DRWG. NO. LA50P000

FINAL

LTR	REVISION	CHK	APD
A	60989-RELEASED 02/21/03 MRD	TN	ND